

# AEROTECH AUTOMATION1

## Drive-Based Motion Controller **Automation1 iXC4**

### Motion. Control. Together.

The Automation1 iXC4 PWM servo motor drive with integrated motion controller is two solutions in one: it's capable of complete machine control and provides sub-nanometer levels of servo motor control. The powerful Automation1-iSMC motion controller is loaded onto the same hardware that runs the drive, which in turn manages the trajectory of up to 12 axes of control over the HyperWire motion bus. Control your industrial laser or process tool with precision with multi-axis Part-Speed PSO; control your entire process with industrial Ethernet and an I/O expansion board.

### Automation1

The iXC4 is a part of the user-friendly Automation1 motion control platform, which includes the following:

- ◆ **Development Software**
- ◆ **Controls**
- ◆ **Motor Drives**
- ◆ **Fiber-Optic HyperWire® Communication Bus**



### KEY FEATURES:

- ◆ Unlock the full **MOTION CONTROL** power of our Automation1-iSMC intelligent software-based motion controller
- ◆ Features **COMPLETE CONFIGURATION & PERFORMANCE** capability of XC4 servo motor drive
- ◆ **ELIMINATE THE PC** from your control scheme
- ◆ Enjoy up to **12 AXES OF CONTROL** by connecting more Automation1 drives over the HyperWire fiber-optic bus
- ◆ **EXPAND YOUR I/O** by adding expansion board to the iXC4 or to other connected drives

## AUTOMATION1 iXC4 CONTROLLER SPECIFICATIONS

SPECIFICATION	DESCRIPTION
<b>Motion Controller<sup>(1)</sup></b>	Aerotech's <a href="#">Automation1-iSMC</a> Intelligent Software-Based Motion Controller (version 2.00 and above)
<b>Maximum Axes of Control<sup>(1)</sup></b>	Up to 12 axes
<b>I/O Points<sup>(1)</sup></b>	See "26-Pin Auxiliary Feedback Connector" & "I/O Expansion Board (-EB1)" specifications below.
<b>Programming Language<sup>(1)</sup></b>	AeroScript, RS-274 G-code
<b>APIs<sup>(1)</sup></b>	<ul style="list-style-type: none"> <li>.NET (cross-platform Linux support)</li> <li>C (cross-platform Linux support)</li> <li>EPICS (cross-platform Linux support) see <a href="http://EPICS.anl.gov">EPICS.anl.gov</a></li> </ul>
<b>Programming Tasks<sup>(1)</sup></b>	4 user tasks (standard) / 9 user tasks (optional) 1 reserved task
<b>Position Modes</b>	Absolute, incremental, dynamic trajectory correction
<b>Motion types<sup>(1)</sup></b>	<ul style="list-style-type: none"> <li>Linear motion</li> <li>Clockwise &amp; counterclockwise</li> <li>Jogging</li> <li>Homing</li> <li>Rapid</li> <li>Freerun</li> <li>Many more</li> </ul>
<b>Acceleration Profiles</b>	<ul style="list-style-type: none"> <li>Linear (time &amp; rate based)</li> <li>Sine (time &amp; rate based)</li> <li>S-curve (time &amp; rate based)</li> </ul>
<b>Velocity Profiling<sup>(1)</sup></b>	Yes
<b>Safe Zones<sup>(1)</sup></b>	Yes
<b>Advanced Features<sup>(1)</sup></b>	<ul style="list-style-type: none"> <li>Corner rounding</li> <li>Tool normalcy control</li> <li>Cutter compensation</li> <li>Programmable fixture offsets<sup>(2)</sup></li> <li>Rotation, mirroring &amp; translation transformations</li> <li>Part profile scaling</li> <li>Polar &amp; cylindrical transformations<sup>(2)</sup></li> <li>Orthogonality correction</li> <li>Electronic gearing</li> <li>EasyTune<sup>®</sup> &amp; classical tuning</li> <li>Backlash compensation</li> <li>Spindle motion</li> <li>High-speed registration</li> <li>Multi-dimensional error mapping</li> </ul>
<b>Access Control</b>	No
<b>Controller File System</b>	Yes (5 GB)
<b>Supported HyperWire Drives</b>	<ul style="list-style-type: none"> <li>Automation1-XC6e<sup>(3)(4)</sup></li> <li>Automation1-XC4e<sup>(3)(4)</sup></li> <li>Automation1-XC2e<sup>(3)(4)</sup></li> <li>Automation1-XC4<sup>(3)(4)</sup></li> <li>Automation1-XC2<sup>(3)(4)</sup></li> <li>Automation1-XR3<sup>(3)</sup></li> <li>Automation1-XL5e<sup>(3)(4)</sup></li> <li>Automation1-XL2e<sup>(3)(4)</sup></li> <li>Automation1-SI4<sup>(3)</sup></li> <li>Automation1-XI4<sup>(3)</sup></li> </ul>
<b>Communication/Configuration Connection</b>	<ul style="list-style-type: none"> <li>Ethernet</li> <li>USB</li> </ul>

Note:

1. See the [Automation1-iSMC](#) controller page for more information.
2. May require advanced programming.
3. Contains I/O on base drive.
4. Drive I/O expansion board option available.

## AUTOMATION1 iXC4 DEVICE SPECIFICATIONS

SPECIFICATION	DESCRIPTION
<b>Motor Style</b>	Brush, brushless, voice coil, stepper <sup>(1)</sup>
<b>Motor Supply</b>	Single-phase 0-240 VAC; 50/60 Hz
<b>Control Supply</b>	100-240 VAC; 50/60 Hz
<b>Bus Voltage<sup>(2)</sup></b>	0-340 VDC
<b>Peak Output Current (1 sec)<sup>(3)</sup></b>	10 A <sub>pk</sub>   20 A <sub>pk</sub>   30 A <sub>pk</sub>
<b>Continuous Output Current<sup>(3)</sup></b>	5 A <sub>pk</sub>   10 A <sub>pk</sub>   10 A <sub>pk</sub>
<b>Position Synchronized Output (PSO)</b>	Standard: One-axis PSO (includes one-axis part-speed PSO) <sup>(4)</sup>  Optional: Three-axis part-speed PSO
<b>25-Pin Motor Feedback Connector</b>	High-speed differential inputs (encoder sin, cos and marker) CW and CCW limits Hall effect sensor inputs (A, B, and C) Analog motor temperature input (accepts digital) Brake output
<b>26-Pin Auxiliary Feedback Connector</b>	High-speed differential inputs (encoder sin, cos and marker)* 4x optically isolated digital inputs 4x optically isolated digital outputs 1x 16-bit differential ±10 V analog input 1x 16-bit single-ended ±10 V analog output 2x optically isolated high-speed inputs *This channel is bidirectional and can be used to echo out encoder signal
<b>Multiplier Options</b>	MX0 Option: Primary Encoder: 40 million counts-per-second square-wave input Auxiliary Encoder: 40 million counts-per-second square-wave input  MX1 Option: Primary Encoder: 2 MHz / 450 kHz (bandwidth selectable) sine-wave input, encoder multiplier up to x16,384* Auxiliary Encoder: 40 million counts per second square-wave input  *Encoders multiplied with this input cannot be echoed out.
<b>I/O Expansion Board (-EB1)</b>	1x additional PSO connection point 1x PSO synchronization input 16x digital inputs, optically isolated 16x digital outputs, optically isolated 3x analog inputs, 16-bit, differential, ±10 V 3x analog outputs, 16-bit, single-ended, ±10 V
<b>Drive Array Memory</b>	4,194,304 32-bit elements (16.7 MB)
<b>High-Speed Data Capture</b>	Yes (50 ns latency)

*chart continued on next page*

## AUTOMATION1 iXC4 DEVICE SPECIFICATIONS

SPECIFICATION	DESCRIPTION
<b>Safe Torque Off (STO)</b>	Yes, SIL3/PLe/Cat 4
<b>HyperWire Connections</b>	1x HyperWire small form-factor pluggable (SFP) ports
<b>Automatic Brake Control</b>	Standard; 24 V at 1 A
<b>Absolute Encoder</b>	Renishaw resolute BiSS; EnDat 2.1; and EnDat 2.2
<b>Current Loop Update Rate</b>	20 kHz
<b>Servo Loop Update Rate</b>	20 kHz
<b>Power Amplifier Bandwidth</b>	Selectable through software (85-95% efficiency)
<b>Minimum Load Inductance</b>	0.1 mH
<b>Operating Temperature</b>	0 to 40°C
<b>Storage Temperature</b>	-30 to 85°C
<b>Weight</b>	2.36 kg (5.20 lb)
<b>Compliance</b>	CE approved, NRTL safety certification, EU 2015/863 RoHS 3 directive

Note:

1. For stepper motors only, one-half of bus voltage is applied across the motor (e.g 80 VDC supply results in 40 VDC across stepper motor).
2. Output voltage depends on input voltage.
3. Peak value of the sine wave; rms current for AC motors is  $0.707 A_{pk}$ .
4. Encoder feedback-based PSO requires the -MX0 multiplier option.



## AUTOMATION1 iXC4 ORDERING OPTIONS

### Controller Configuration

---

To configure and load the motion controller on the iXC4 drive, please configure and order an Automation1-iSMC intelligent controller with your iXC4 drive. The Automation1-iSMC configuration should include the iXC4 as the “hardware platform.”

### Automation1-iXC4

---

**Automation1-iXC4**      PWM Servo Drive with Motion Controller

### Peak Current

---

-10	10 A peak, 5 A cont. current (default)
-20	20 A peak, 10 A cont. current
-30	30 A peak, 10 A cont. current

### Expansion Board

---

-EB0	No expansion board (default)
-EB1	IO expansion board

### Multiplier

---

-MX0	No encoder multiplier (default)
-MX1	2 MHz / 450 kHz (bandwidth selectable) x16384 multiplier (primary), no multiplier (auxiliary)

### PSO

---

-PSO1 <sup>(1)</sup>	One-axis PSO (includes One-axis Part-Speed PSO) (Default)
-PSO6	Three-axis Part-Speed PSO

1. Encoder feedback-based PSO requires the -MX0 multiplier option.

### External Shunt


---

-SX0	No 2-pin connector for external shunt (default)
-SX1	2-pin connector for external shunt



# AUTOMATION1 iXC4 DIMENSIONS

## AUTOMATION1-iXC4 WITH -EBO (NO EXPANSION BOARD) OPTION

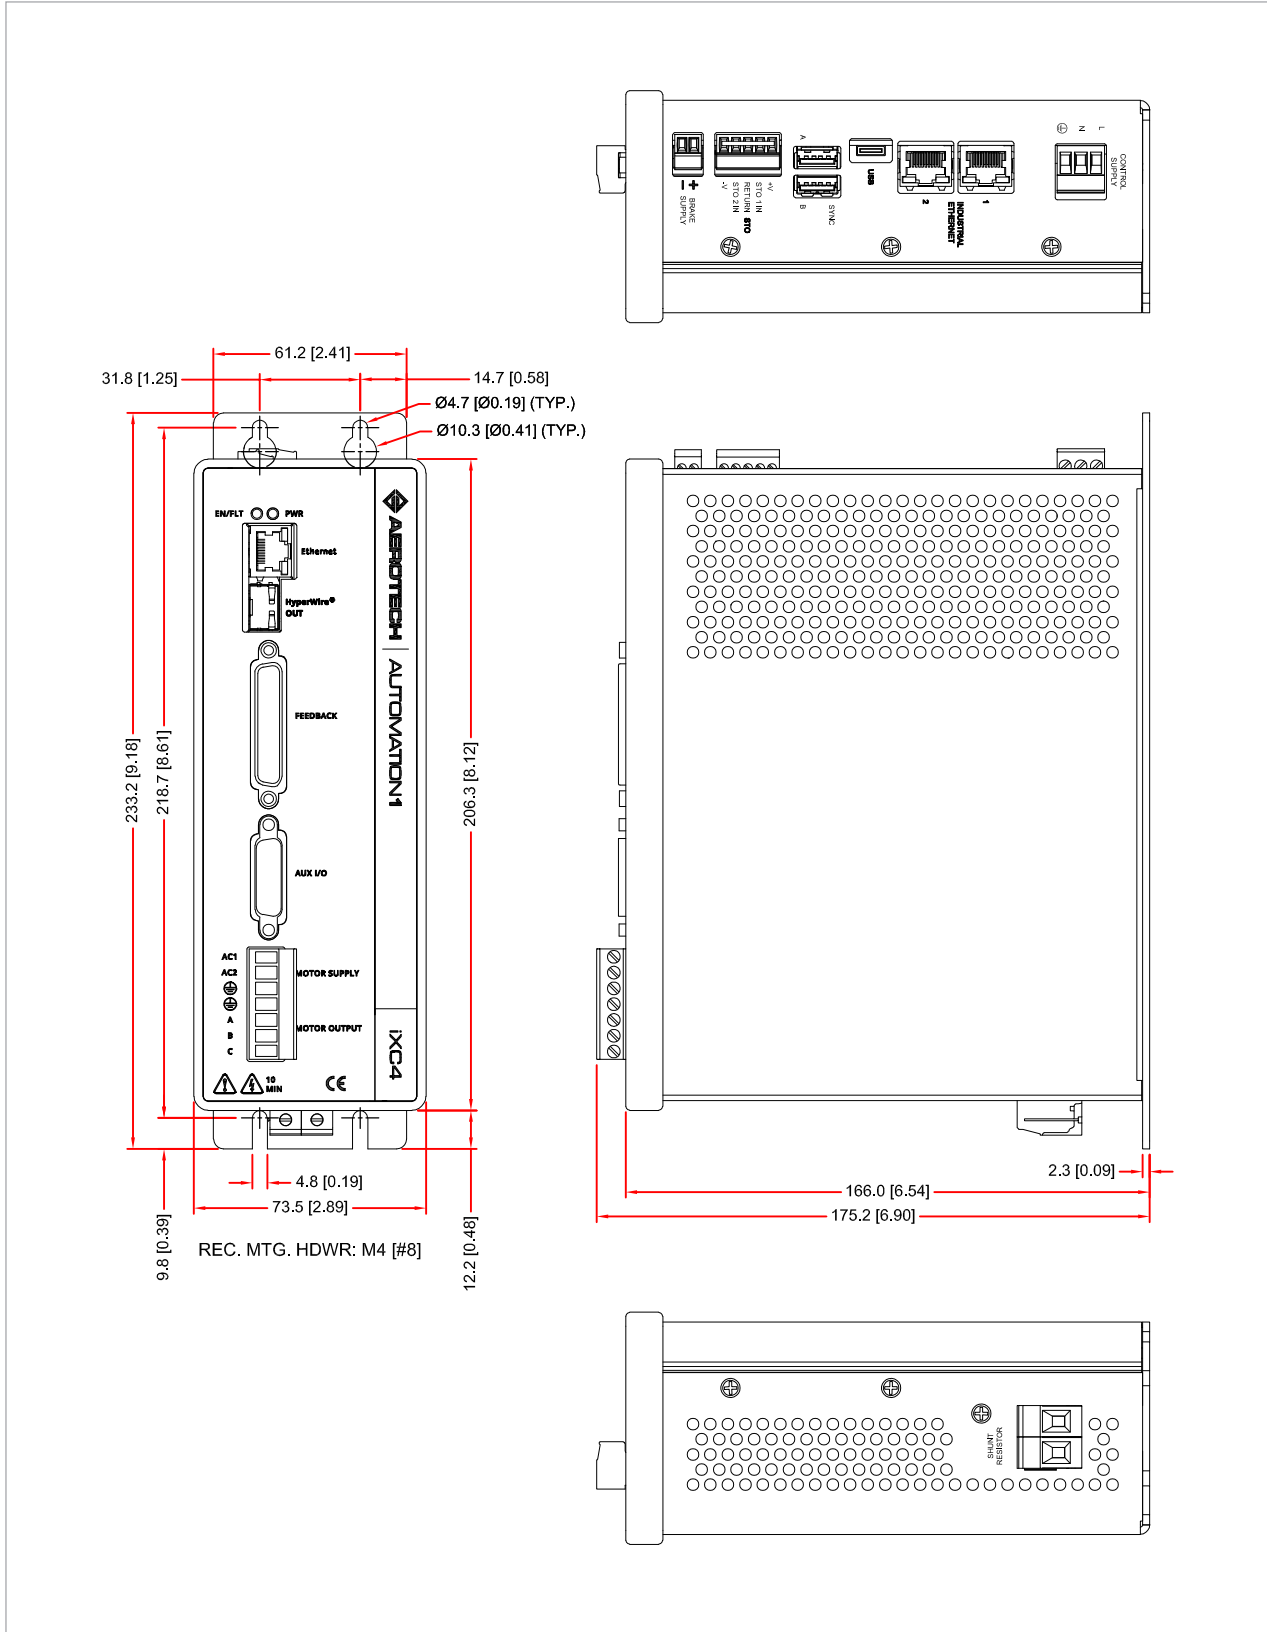

**AUTOMATION1 iXC4 DIMENSIONS**

**AUTOMATION1-iXC4 WITH -EB1 (EXPANSION BOARD) OPTION**

