



## Automation1-XC4 Specifications





Specifications	10	20	30
Motor Style	Brush, brushless, voice coil, stepper <sup>1</sup>		
Motor Supply	Single-phase 0-240 VAC; 50/60 Hz		
Control Supply	100-240 VAC; 50/60 Hz		
Bus Voltage <sup>2</sup>	0-340 VDC		
Peak Output Current (1 sec) <sup>33</sup>	10 A <sub>pk</sub>	20 A <sub>pk</sub>	30 A <sub>pk</sub>
Continuous Output Current <sup>3</sup>	5 A <sub>pk</sub>	10 A <sub>pk</sub>	
Position Synchronized Output (PSO)	One-axis PSO and One-axis Part-Speed PSO standard		
25-Pin Motor Feedback Connector	High-speed differential inputs (encoder sin, cos and marker)* CW and CCW limits Hall effect sensor inputs (A, B, and C) Analog motor temperature input (accepts digital) Brake output		
26-Pin Auxiliary Feedback Connector	<ul style="list-style-type: none"> <li>•High-speed differential inputs (encoder sin, cos and marker)*</li> <li>•4x optically isolated digital inputs.</li> <li>•4x optically isolated digital outputs.</li> <li>•1x 16-bit differential ±10 V analog input</li> <li>•1x 16-bit single-ended ±10 V analog output</li> <li>•2x optically isolated high-speed inputs</li> </ul> *This channel is bidirectional, and can be used to echo out encoder signal.		
Multiplier Options	MX0; no encoder multiplier includes: <ul style="list-style-type: none"> <li>• Primary encoder 40 million counts-per-second square-wave input</li> <li>• Auxiliary encoder 40 million counts-per-second square-wave input</li> </ul> MX1; MX1 encoder multiplier includes: <ul style="list-style-type: none"> <li>• Primary Encoder 2 MHz / 450 kHz (bandwidth selectable)*</li> <li>• Auxiliary Encoder 40 million samples-per-second square wave input.</li> </ul> *Multiplied encoder cannot be echoed out.		
I/O Expansion Board (-EB1)	1x additional PSO connection point 1x PSO synchronization Input 16x digital inputs, optically isolated 16x digital outputs, optically isolated 3x analog inputs, 16-bit, differential, ±10 V 3x analog outputs, 16-bit, single-ended, ±10 V		
Drive Array Memory	4,194,304 32-bit elements		
High-Speed Data Capture	Yes (50 ns latency)		
Safe Torque Off (STO)	Yes, SIL3/PLe/Cat 4		
HyperWire Connections	2x HyperWire small form-factor pluggable (SFP) Ports		
Automatic Brake Control	Standard; 24 V at 1 A		
Absolute Encoder	Renishaw Resolute BiSS; EnDat 2.1; and EnDat 2.2		
Current Loop Update Rate	20 kHz		
Servo Loop Update Rate	20 kHz		
Power Amplifier Bandwidth	Selectable through software (85-95% efficiency) kHz		
Minimum Load Inductance	0.1 mH		
Operating Temperature	0 to 40°C		
Storage Temperature	-30 to 85°C		
Weight	2.36 kg (5.20 lb.)		
Compliance	CE approved, NRTL safety certification, EU 2015/863 RoHS 3 directive		

1 For stepper motors only, one-half of bus voltage is applied across the motor (e.g., 80 VDC supply results in 40 VDC across stepper motor).

2 Output voltage dependent upon input voltage.

3 Peak value of the sine wave; rms current for AC motors is 0.707 \* A pk.

# Automation1-XC4 Dimensions

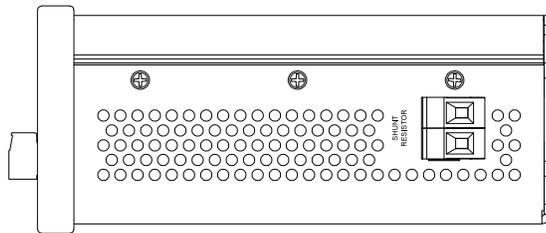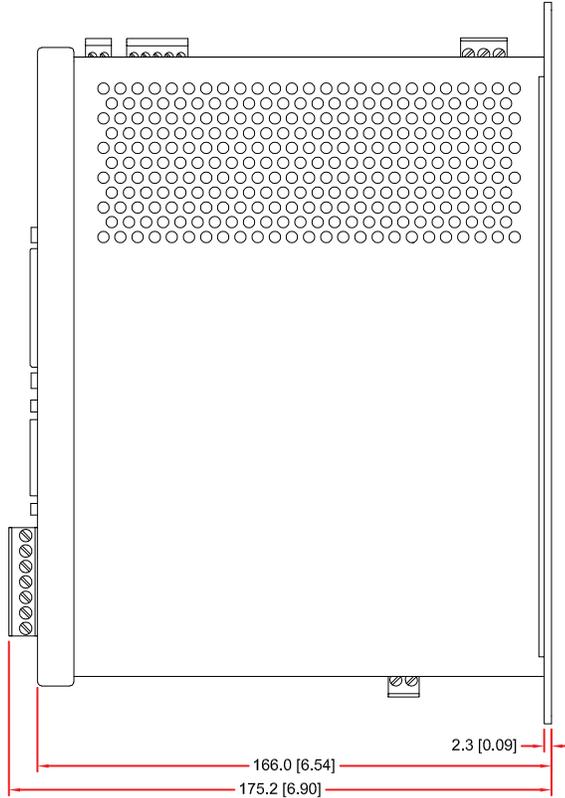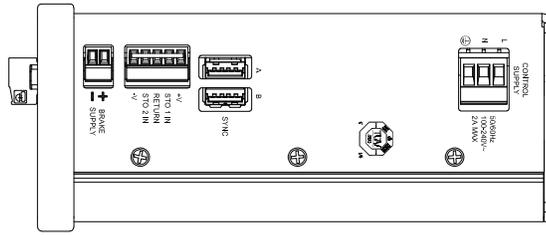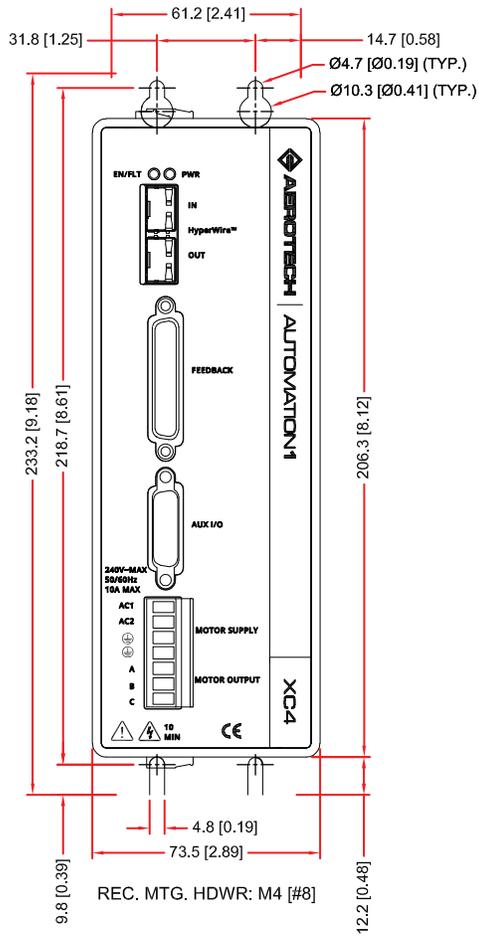



## Automation1-XC4 **Ordering Information**

<b>XC4</b>	
XC4	XC4 PWM digital drive
<b>Peak Current</b>	
-10	10 A peak, 5 A cont. current (default)
-20	20 A peak, 10 A cont. current
-30	30 A peak, 10 A cont. current
<b>Expansion Board</b>	
-EB0	No expansion board (default)
-EB1	IO expansion board
<b>Multiplier</b>	
-MX0	No encoder multiplier (default)
-MX1	2 MHz / 450 kHz (bandwidth selectable)
<b>PSO</b>	
-PSO1	One-Axis PSO (default; includes One-Axis Part-Speed PSO)
<b>External Shunt</b>	
-SX0	No 2-pin connector for external shunt (default)
-SX1	2-pin connector for external shunt