




Automation1 GI4 Galvo Scanner Controller

HARDWARE MANUAL

Revision 1.00

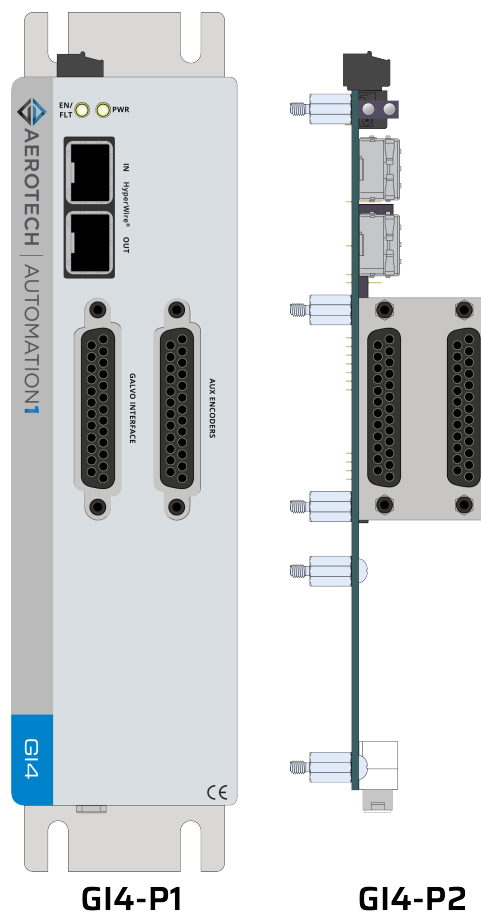

GLOBAL TECHNICAL SUPPORT

Go to the [Global Technical Support Portal](#) for information and support about your Aerotech, Inc. products. The website supplies software, product manuals, Help files, training schedules, and PC-to-PC remote technical support. If necessary, you can complete Product Return (RMA) forms and get information about repairs and spare or replacement parts. To get help immediately, contact a service office or your sales representative. Include your customer order number in your email or have it available before you call.

This manual contains proprietary information and may not be reproduced, disclosed, or used in whole or in part without the express written permission of Aerotech, Inc. Product names mentioned herein are used for identification purposes only and may be trademarks of their respective companies.

Copyright © 2020-2021, Aerotech, Inc., All rights reserved.



Table of Contents

Automation1 GI4 Galvo Scanner Controller	1
Table of Contents	3
List of Figures	4
List of Tables	5
EU Declaration of Conformity	7
Safety Procedures and Warnings	9
Installation Overview	11
Chapter 1: Introduction	13
1.1. Electrical Specifications	17
1.2. Mechanical Specifications	18
1.2.1. Mounting and Cooling	18
1.2.2. Dimensions	19
1.2.3. DIN Rail Mounting	21
1.2.4. OEM Mounting	22
1.3. Environmental Specifications	23
1.4. Drive and Software Compatibility	24
Chapter 2: Installation and Configuration	25
2.1. Input Power Connections	26
2.1.1. Control Supply Connector	26
2.1.2. Minimizing Noise for EMC/CE Compliance	27
2.2. Galvo Interface Connector	28
2.3. Aux Encoders Connector	29
2.3.1. Square Wave Encoder	30
2.4. Digital I/O Connector	31
2.4.1. Digital Outputs	32
2.4.2. Digital Inputs	35
2.4.3. High-Speed User Input	37
2.5. Analog I/O and Laser Interface Connector	38
2.5.1. Laser Interface Outputs	39
2.5.2. Position Synchronized Output (PSO) Interface	40
2.5.3. Analog Outputs	42
2.5.4. Analog Inputs (Differential)	43
2.5.5. Sync Port	44
2.6. HyperWire Interface	45
2.7. System Interconnection	46
2.8. PC Configuration and Operation Information	47
Chapter 3: Maintenance	49
3.1. Preventative Maintenance	50
Appendix A: Warranty and Field Service	51
Appendix B: Revision History	53
Index	55

List of Figures

Figure 1-1:	GI4 Galvo Scanner Controller	13
Figure 1-2:	GI4-OEM Galvo Scanner Controller	14
Figure 1-3:	Functional Diagram	16
Figure 1-4:	Dimensions [-P1 Package]	19
Figure 1-5:	Dimensions [-P2 Package]	20
Figure 1-6:	Din Rail Clip Dimensions	21
Figure 2-1:	Control Supply Connections	26
Figure 2-2:	Square Wave Encoder Interface	30
Figure 2-3:	Digital Outputs Schematic	33
Figure 2-4:	Digital Outputs Connected in Current Sourcing Mode	34
Figure 2-5:	Digital Outputs Connected in Current Sinking Mode	34
Figure 2-6:	Digital Inputs Schematic	35
Figure 2-7:	Digital Inputs Connected to Current Sourcing (PNP) Devices	36
Figure 2-8:	Digital Inputs Connected to Current Sinking (NPN) Devices	36
Figure 2-9:	High-Speed Input	37
Figure 2-10:	TTL Output	39
Figure 2-11:	PSO TTL Outputs Schematic	40
Figure 2-12:	PSO External Sync Input Schematic	41
Figure 2-13:	Analog Outputs Schematic	42
Figure 2-14:	Analog Inputs Schematic	43
Figure 2-15:	System Interconnection Drawing (Best Practice)	46

List of Tables

Table 1-1:	Feature Summary	15
Table 1-2:	Electrical Specifications	17
Table 1-3:	Mounting Specifications	18
Table 1-4:	Mounting Parts	21
Table 1-5:	OEM Mounting Parts	22
Table 1-6:	Environmental Specifications	23
Table 1-7:	Drive and Software Compatibility	24
Table 2-1:	Control Supply Connector Wiring Specifications	26
Table 2-2:	Mating Connector Part Numbers for the Control Supply Connector	26
Table 2-3:	Galvo Interface Pinout	28
Table 2-4:	Mating Connector Part Numbers for the Galvo Interface Connector	28
Table 2-5:	Aux Encoders Connector Pinout	29
Table 2-6:	Mating Connector Part Numbers for the Aux Encoders Connector	29
Table 2-7:	Square Wave Encoder Specifications	30
Table 2-8:	Aux Encoders Connector Pinout	30
Table 2-9:	Digital I/O Connector Pinout	31
Table 2-10:	Mating Connector Part Numbers for the Digital I/O Connector	31
Table 2-11:	Digital Output Specifications	32
Table 2-12:	Digital Output Pins on Digital I/O Connector	32
Table 2-13:	Digital Input Specifications	35
Table 2-14:	Digital Input Pins on the Digital I/O Connector	35
Table 2-15:	High-Speed Input Specifications	37
Table 2-16:	High-Speed Input Pins on the Digital I/O Connector	37
Table 2-17:	Analog I/O and Laser Interface Connector Pinout	38
Table 2-18:	Mating Connector Part Numbers for the Laser Interface Connector	38
Table 2-19:	Laser Output Pins on the Analog I/O and Laser Interface Connector	39
Table 2-20:	Laser Output Specifications	39
Table 2-21:	PSO Specifications	40
Table 2-22:	PSO External Sync Specifications	40
Table 2-23:	PSO Output Pins on the Analog I/O and Laser Interface Connector	40
Table 2-24:	Analog Output Specifications	42
Table 2-25:	Analog Output Pins on the Analog I/O and Laser Interface Connector	42
Table 2-26:	Analog Input Specifications	43
Table 2-27:	Analog Input Pins on the Analog I/O and Laser Interface Connector	43
Table 2-28:	Sync Port Cables	44
Table 2-29:	HyperWire Card Part Number	45
Table 2-30:	HyperWire Cable Part Numbers	45
Table 3-1:	LED Description	49
Table 3-2:	Troubleshooting	49
Table 3-3:	Preventative Maintenance	50

This page intentionally left blank.

EU Declaration of Conformity

Manufacturer Aerotech, Inc.
Address 101 Zeta Drive
Pittsburgh, PA 15238-2811
USA
Product GI4
Model/Types All

This is to certify that the aforementioned product is in accordance with the applicable requirements of the following directive(s):

2014/35/EU	Low Voltage Directive
2011/65/EU	RoHS 2 Directive
EU 2015/863	Amendment RoHS 3 Directive

and has been designed to be in conformity with the applicable requirements of the following standard(s) when installed and used in accordance with the manufacturer's supplied installation instructions.

IEC 61010-1:2010	Safety Requirements for Electrical Equipment
------------------	--

Authorized Representative



/ Simon Smith, European Director

Aerotech Ltd
The Old Brick Kiln, Ramsdell, Tadley
Hampshire RG26 5PR
UK

Engineer Verifying Compliance



/ Alex Weibel

Aerotech, Inc.
101 Zeta Drive
Pittsburgh, PA 15238-2811
USA
10/21/2021

Date



This page intentionally left blank.

Safety Procedures and Warnings



IMPORTANT: This manual tells you how to carefully and correctly use and operate the controller.

- Read all parts of this manual before you install or operate the controller or before you do maintenance to your system.
- To prevent injury to you and damage to the equipment, obey the precautions in this manual.
- All specifications and illustrations are for reference only and were complete and accurate as of the release of this manual. To find the newest information about this product, refer to www.aerotech.com.

If you do not understand the information in this manual, contact Aerotech Global Technical Support.



IMPORTANT: This product has been designed for light industrial manufacturing or laboratory environments. If the product is used in a manner not specified by the manufacturer:

- The protection provided by the equipment could be impaired.
- The life expectancy of the product could be decreased.




WARNING: To prevent damage to the equipment and decrease the risk of electrical shock and injury, obey the precautions that follow.

1. Supply each operator with the necessary protection from live electrical circuits.
2. Install the necessary precautions to supply safety and protection to the operator.
3. Do not connect or disconnect electrical components, wires, and cables while this product is connected to a power source.
4. Before you connect wires to this product, disconnect the electrical power.
5. Make sure that all components are grounded correctly and that they obey the local electrical safety requirements.
6. Before you do maintenance to the equipment, disconnect the electrical power.
7. Make sure that all system cables are correctly attached and positioned.
8. Do not use the cables or the connectors to lift or move this product.
9. Use this product only in environments and operating conditions that are approved in this manual.
10. Only trained operators should operate this equipment.

This page intentionally left blank.


Installation Overview

The images that follow show the order in which to make connections and settings that are typical to the GI4. If a custom interconnect drawing was supplied with your system, that drawing is on your Storage Device and shows as a line item on your Sales Order in the Integration section.

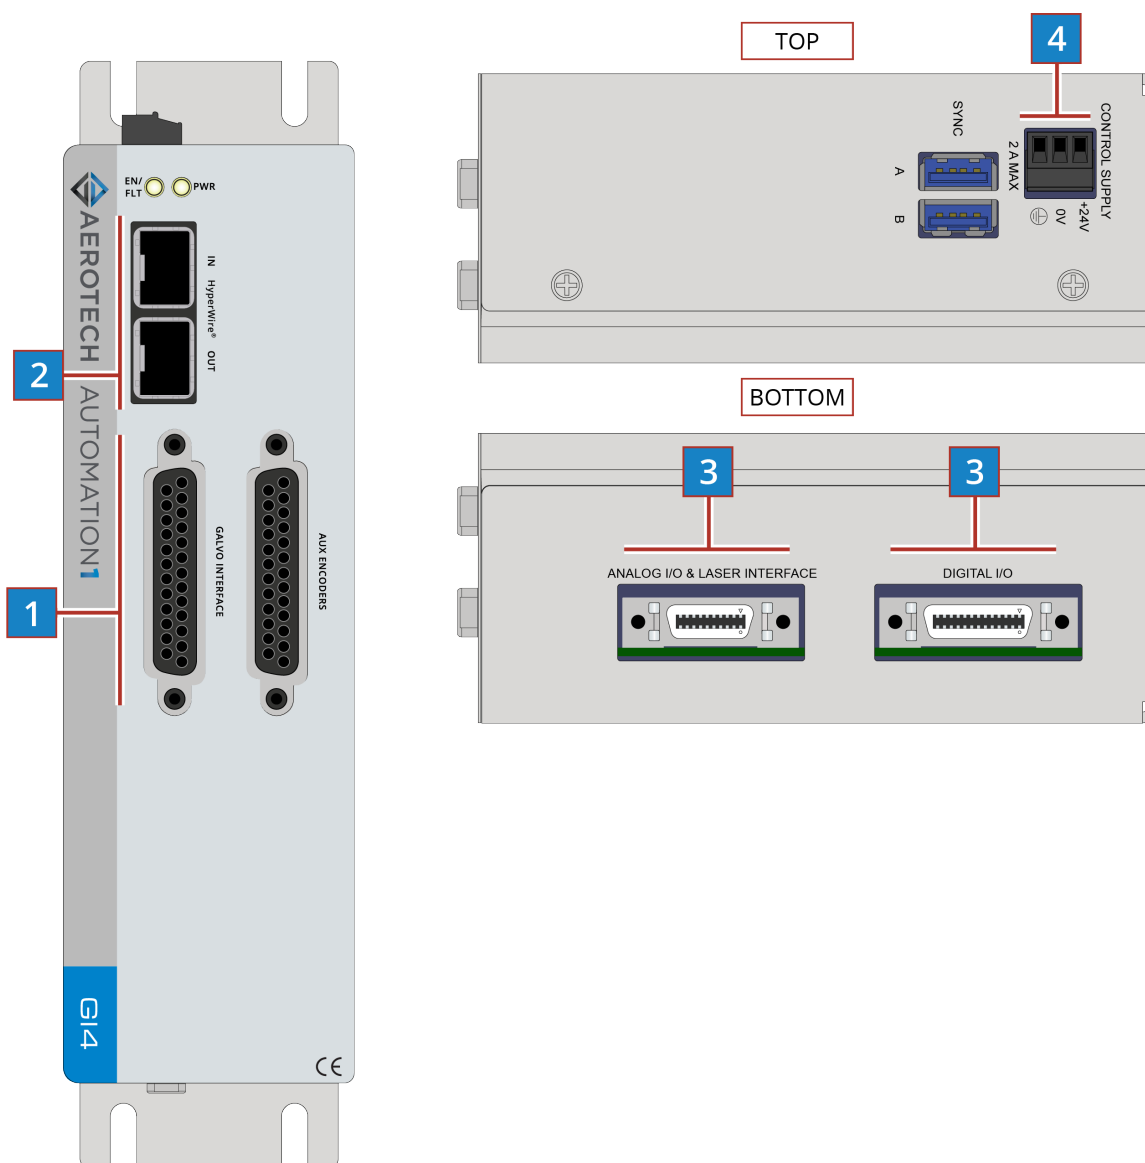

1	Connect the galvo scanner to the Galvo Interface connector.	Section 2.2.
2	Connect the PC HyperWire to the HyperWire In port.	Section 2.6.
3	Connect the laser interface input and additional I/O as required by your application.	Section 2.4.
4	Connect the power supply to the Control Supply.	Section 2.1.1.

Figure 1: Installation Connection Overview (Standard)

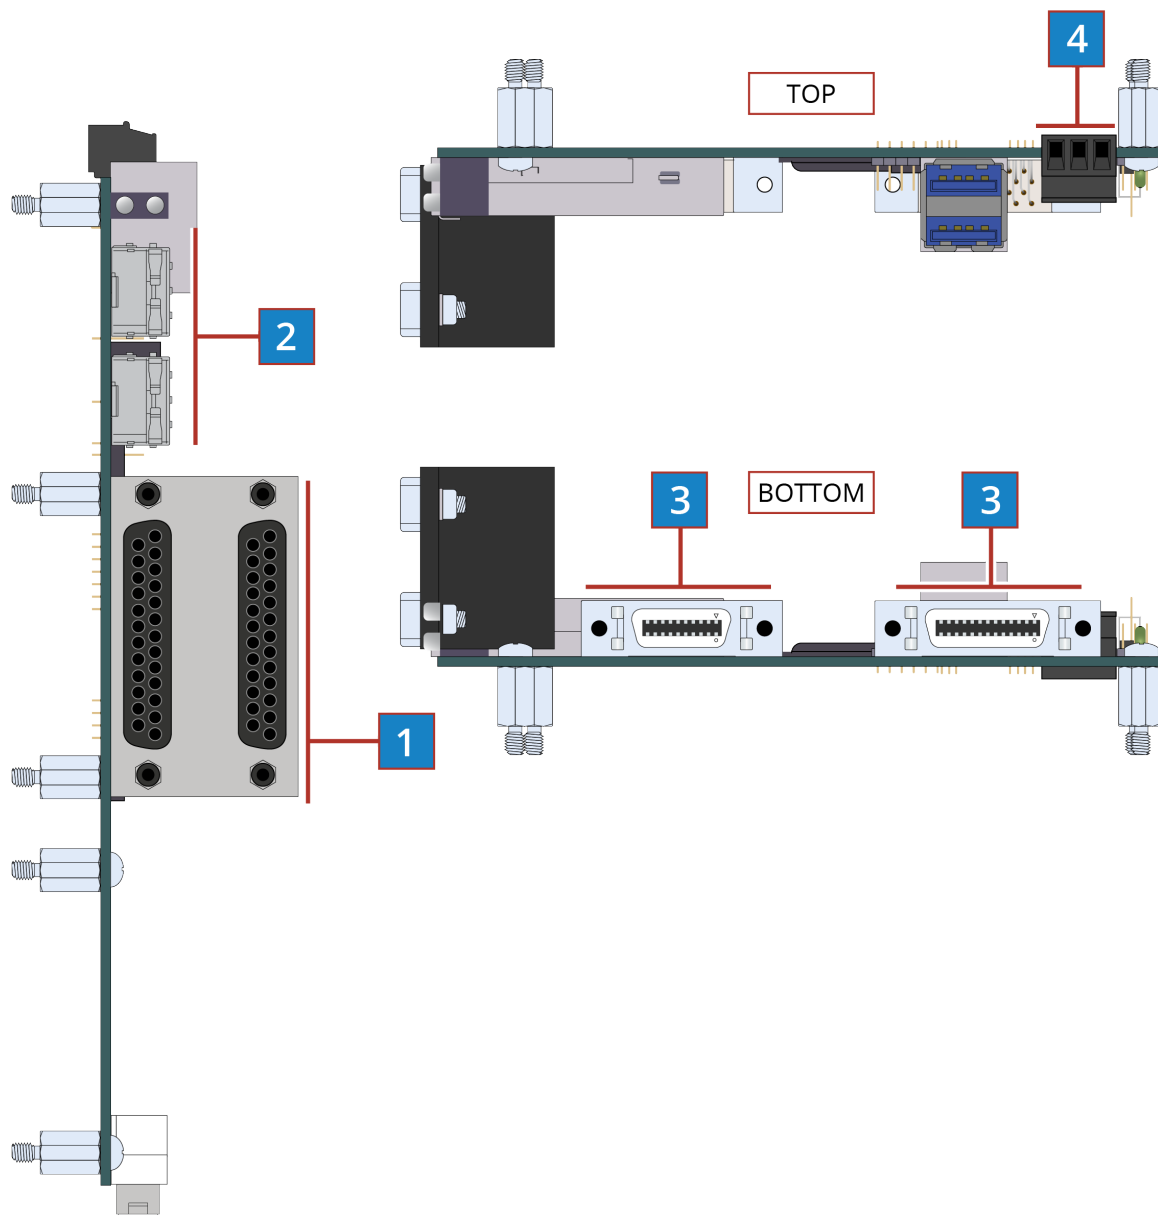

1	Connect the galvo scanner to the Galvo Interface connector.	Section 2.2.
2	Connect the PC HyperWire to the HyperWire In port.	Section 2.6.
3	Connect the laser interface input and additional I/O as required by your application.	Section 2.4.
4	Connect the power supply to the Control Supply.	Section 2.1.1.

Figure 2: Installation Connection Overview (OEM)

Chapter 1: Introduction

The GI4 is a digital drive based on the HyperWire communication protocol. The drive provides deterministic behavior, auto-identification, and is fully software configurable. The drive provides open-loop control of galvo scanners. It lets you synchronize galvo and servo motion to mark parts with no limit to size and complexity.

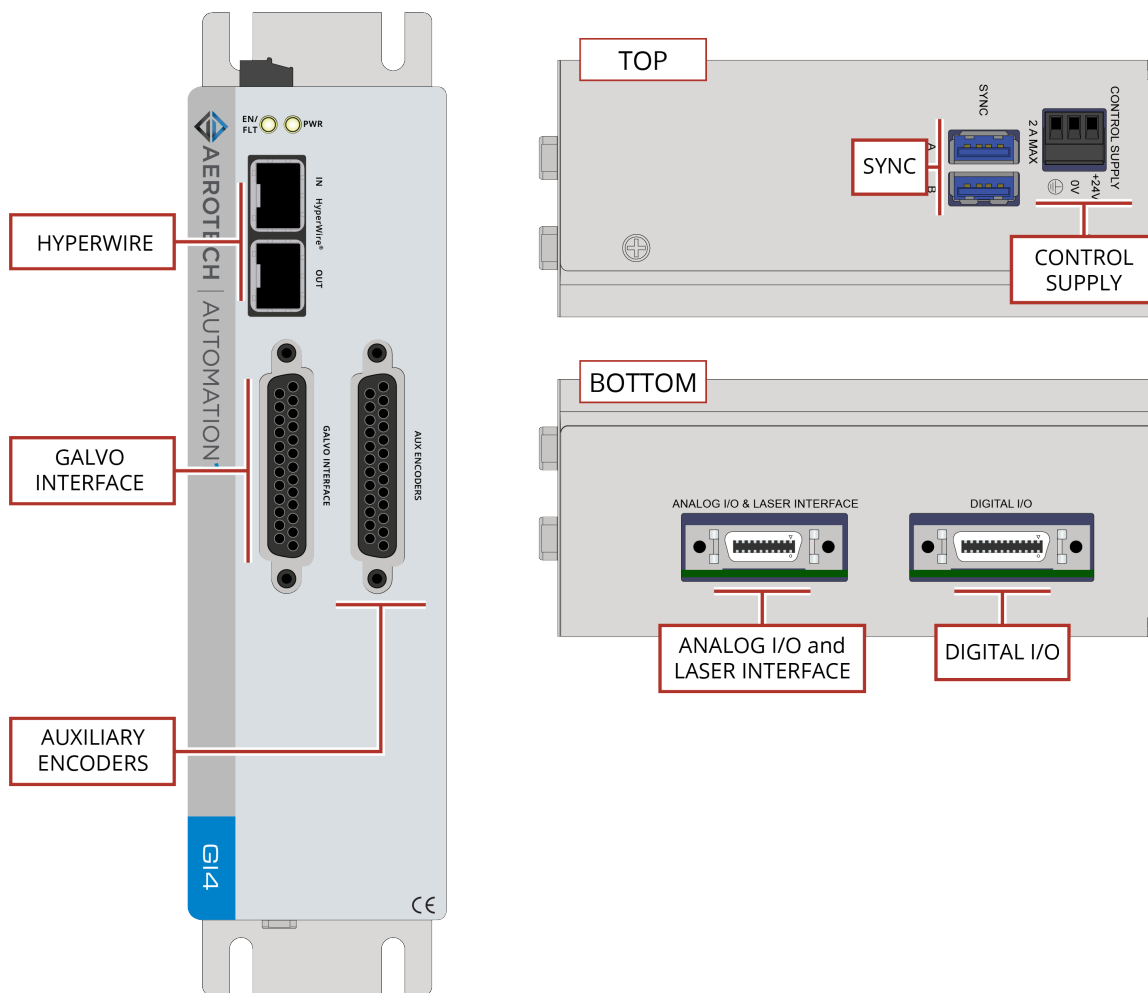


Figure 1-1: GI4 Galvo Scanner Controller

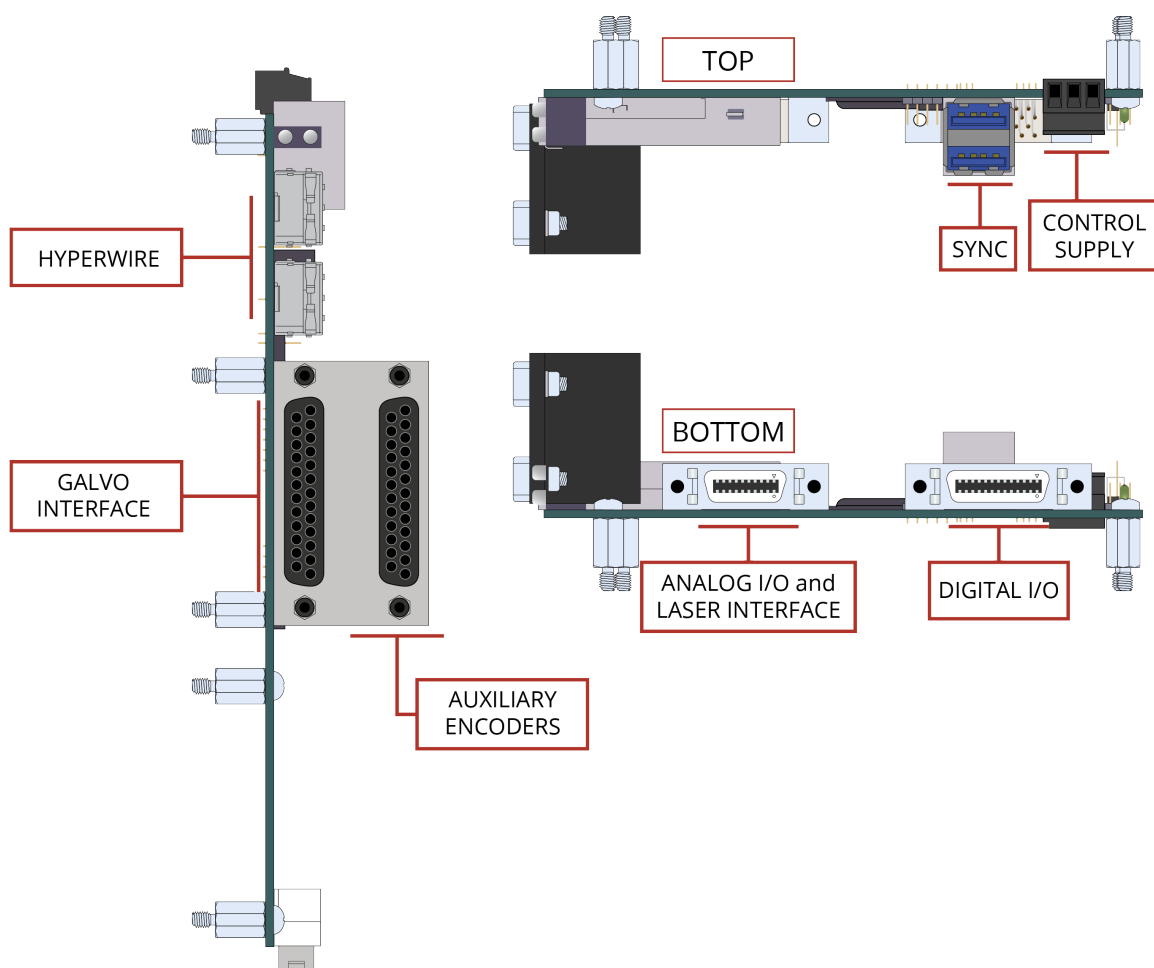


Figure 1-2: GI4-OEM Galvo Scanner Controller

Table 1-1: Feature Summary

Standard Features	
• 24 VDC control supply input	Section 2.1.1.
• Three axis galvo controller interfaces	Section 2.2.
• Three TTL laser outputs	Section 2.5.
• Two line driver square wave auxiliary quadrature encoder inputs or outputs	Section 2.3.1.
• Eight digital user outputs	Section 2.4.1.
• Nine digital user inputs	
▪ Eight digital inputs	Section 2.4.2.
▪ One high-speed input	Section 2.4.3.
• Two 16-bit analog outputs ($\pm 10V$)	Section 2.5.3.
• Four 16-bit differential analog inputs ($\pm 10V$)	Section 2.5.4.
• Sync Ports	Section 2.5.5.
• IFOV Capability	
Options	
Packaging	
-P1	Standard Packaging
-P2	OEM Packaging
PSO	
-PSO0	No PSO firing.
-PSO5	Two-axis Part-Speed PSO firing, which uses the PSO firing circuit based off of the commanded vector velocity of 2 or more axes.
-PSO6	Three-axis Part-Speed PSO firing, which uses the PSO firing circuit based off of the commanded vector velocity of 3 or more axes.
Version	
-DEFAULT	Firmware Matches Software Line
-LEGACY	Legacy Firmware Version X.XX.XXX

The block diagram that follows shows a summary of the connector signals.

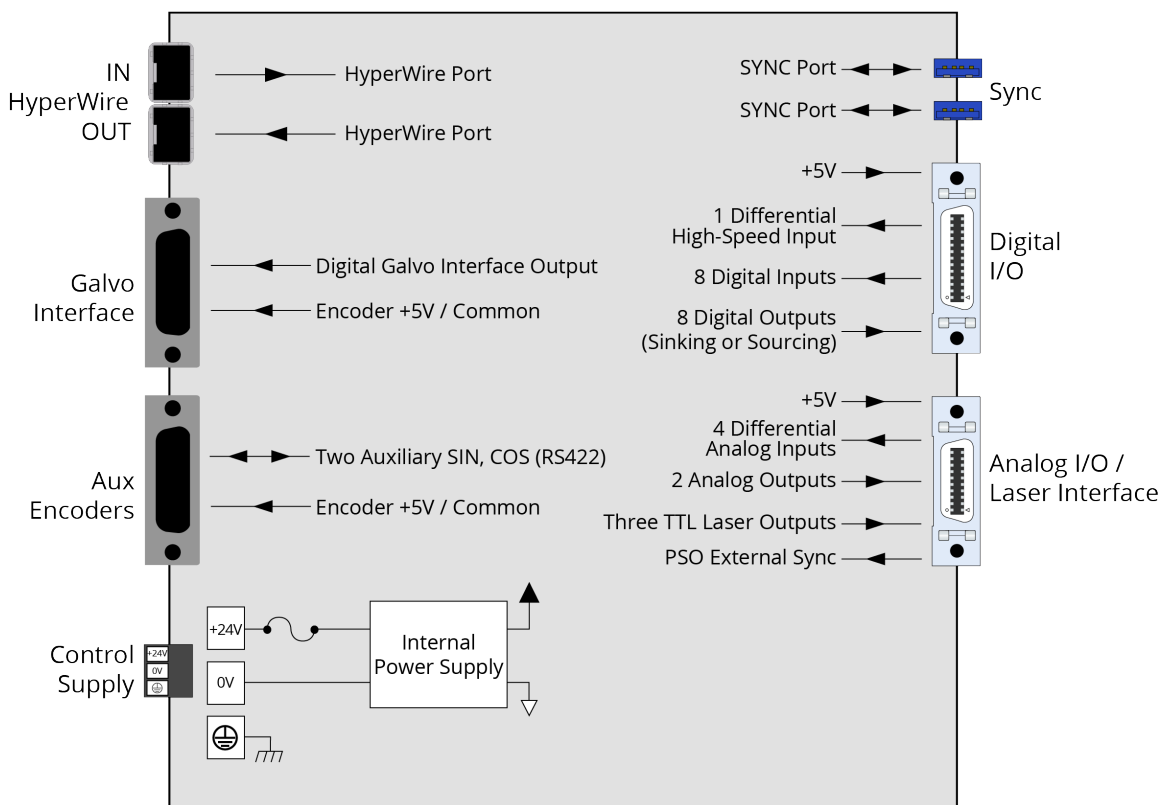


Figure 1-3: Functional Diagram

1.1. Electrical Specifications

Table 1-2: Electrical Specifications

Description		GI4
Control Supply	Input Voltage	24 VDC
	Input Current	2 A max, 0.45 A typical
User Power Supply Output		5 VDC (@ 500 mA)
Modes of Operation		Open loop galvo
Protective Features		Control power supply under voltage

1.2. Mechanical Specifications

1.2.1. Mounting and Cooling

Install the controller in an IP54 compliant enclosure to comply with safety standards. Make sure that there is sufficient clearance surrounding the drive for free airflow and for the cables and connections.

Table 1-3: Mounting Specifications

		GI4
Customer-Supplied Enclosure		IP54 Compliant
		For DIN Rail Mounting, refer to Section 1.2.3. DIN Rail Mounting
Weight	Standard	~0.59 kg
	OEM	~0.23 kg
Mounting Hardware	Standard	M4 [#8] screws (four locations, not included)
	OEM	M3 screws and M3 standoffs (seven locations)
Mounting Orientation		Vertical (typical)
Dimensions		Refer to Section 1.2.2. Dimensions
Minimum Clearance	Airflow	~25 mm
	Connectors	~100 mm
Minimum Airflow (over the drive)	Standard	Provided by internal fan
	OEM	4.2 CMF (NOTE: Customer Supplied)
Operating Temperature		Refer to Section 1.3. Environmental Specifications

1.2.2. Dimensions

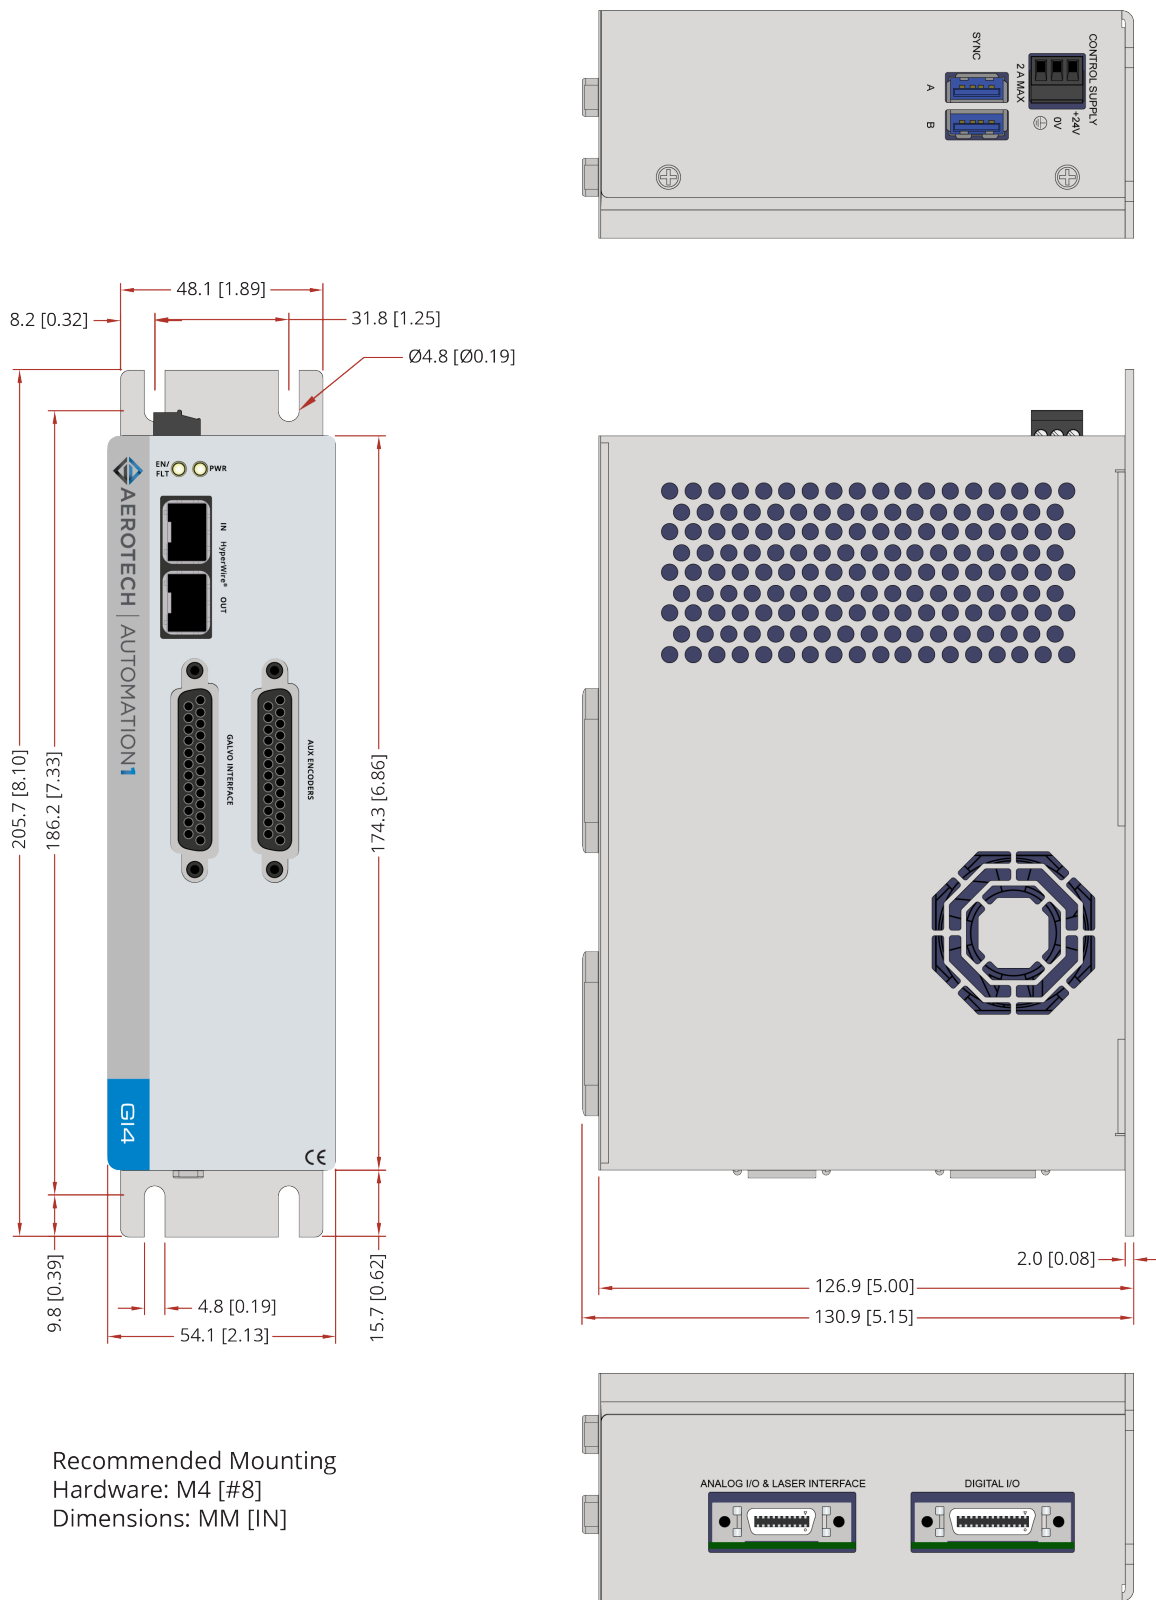


Figure 1-4: Dimensions [-P1 Package]

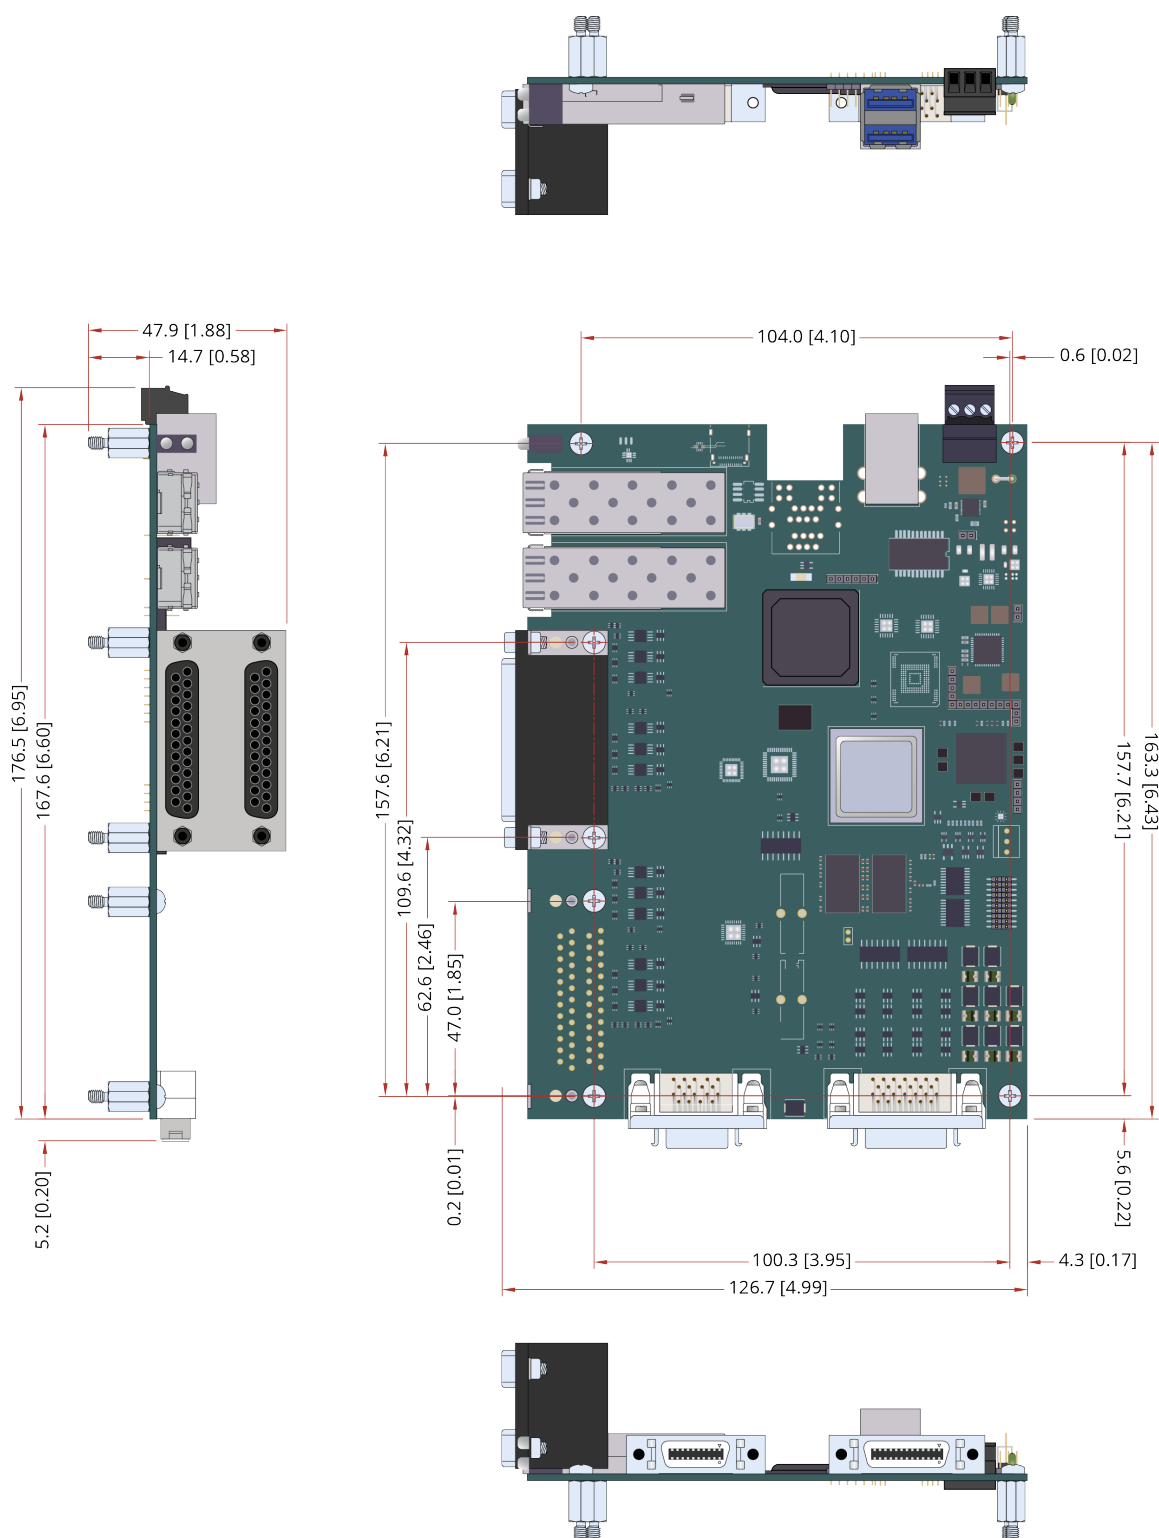


Figure 1-5: Dimensions [-P2 Package]

1.2.3. DIN Rail Mounting

A DIN rail can only be used with the -P1 option.

DIN Rail Mounting Procedure:

- 1. Mount the DIN rail clip to the GI4. The clip and #6-32 x 1/4 flat head screws are included in the DIN rail clip kit.
- 2. Cut the DIN rail so one complete mounting hole extends beyond the last component at each end.
- 3. Secure the DIN Rail to the mounting surface with #10-32 screws spaced every six inches.
NOTE: Do not install the DIN rail to the mounting surface with the components already attached.
- 4. Install all components on to the DIN rail.

Table 1-4: Mounting Parts

	Aerotech P/N
DIN Rail	EAM00914
DIN Rail Clip Kit	HyperWire-DIN

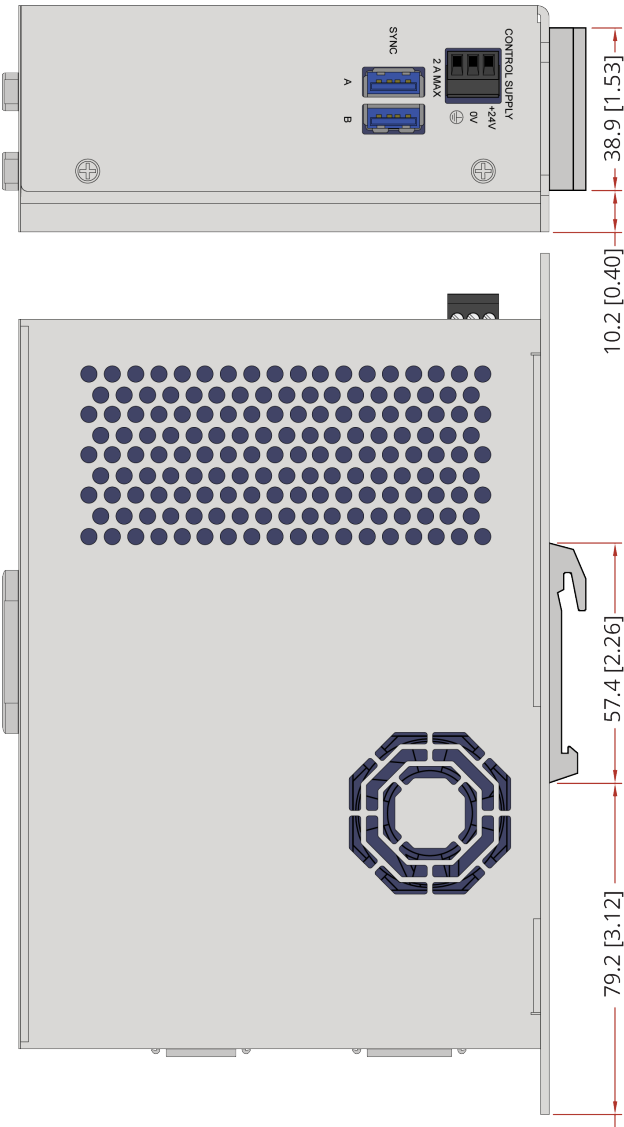


Figure 1-6: Din Rail Clip Dimensions

1.2.4. OEM Mounting

OEM Mounting Procedure:

1. Secure the seven M3 standoffs to the mounting surface with M3 hex nuts. These hex nuts are not included with the drive.

NOTE: Do not install the standoffs to the mounting surface with the drive already attached.

2. Attach the drive to the standoffs with the M3 screws. These screws are included with the drive.

Table 1-5: OEM Mounting Parts

	Aerotech P/N
M3 Threaded Hex Standoff, 10 mm length	EIH01181
M3 Philips Pan Head Screw, 8 mm length	HCY0003008

1.3. Environmental Specifications

Table 1-6: Environmental Specifications

Ambient Temperature	Operating: 0° to 40°C (32° to 104° F)
	Storage: -30° to 85°C (-22° to 185° F)
Humidity Non-condensing	The maximum relative humidity is 80% for temperatures that are less than 31°C and decreases linearly to 50% relative humidity at 40°C.
Operating Altitude	0 m to 2,000 m (0 ft to 6,562 ft) above sea level. If you must operate this product above 2,000 m or below sea level, contact Aerotech, Inc.
Pollution	Pollution Degree 2 Typically only nonconductive pollution occurs.
Operation	Use only indoors

1.4. Drive and Software Compatibility

This table shows the available drives and which version of the software first supported each drive. In the **Last Software Version** column, drives that show a specific version number are not supported after that version.

Table 1-7: Drive and Software Compatibility

Drive Type	First Software Version	Last Software Version
GI4	2.1.0	Current

Chapter 2: Installation and Configuration

Unpacking the Chassis



IMPORTANT: All electronic equipment and instrumentation is wrapped in antistatic material and packaged with desiccant. Ensure that the antistatic material is not damaged during unpacking.

Inspect the shipping container for any evidence of shipping damage. If any damage exists, notify the shipping carrier immediately.

Remove the packing list from the shipping container. Make sure that all the items specified on the packing list are contained within the package.

The documentation for the controller is on the included installation device. The documents include manuals, interconnection drawings, and other documentation pertaining to the system. Save this information for future reference. Additional information about the system is provided on the Serial and Power labels that are placed on the chassis.

The system serial number label contains important information such as the:


- Customer order number (please provide this number when requesting product support)
- Drawing number
- System part number

2.1. Input Power Connections

The controller has one DC input power connector for control power. For a full list of electrical specifications, refer to [Section 1.1](#). Refer to [Section 2.7](#). for a System Interconnection Drawing.

2.1.1. Control Supply Connector

The Control Supply input supplies power to the communications and logic circuitry of the drive . The **+24V** input is connected to an internal fuse. Refer to [Table 1-4](#) for the internal fuse value and part number. For an isolated DC supply, connect **0V** to protective ground at the supply. Use twisted pair wiring to minimize radiated noise emissions (refer to [Figure 2-1](#)).



IMPORTANT: Refer to local electrical safety requirements to correctly size external system wires.

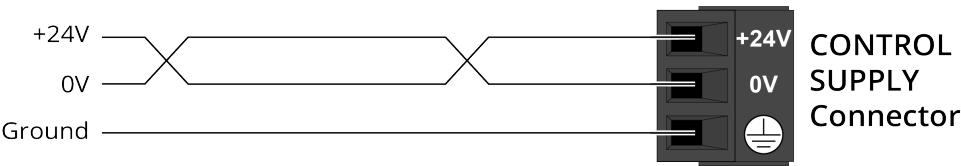


Figure 2-1: Control Supply Connections

Table 2-1: Control Supply Connector Wiring Specifications


Pin	Description	Recommended Wire Size
+24 V	24 VDC (±10%) Control Power Input (2 A max, 0.45 A typical)	0.34 mm ² (#22 AWG)
0 V	Control Power Common Input	0.34 mm ² (#22 AWG)
	Protective Ground	0.34 mm ² (#22 AWG)

Table 2-2: Mating Connector Part Numbers for the Control Supply Connector

Type	Aerotech P/N	Third Party P/N	Screw Torque: N·m	Wire Size: mm ² [AWG]
3-Pin Terminal Block	ECK02456	Phoenix 1839610	0.22 - 0.25	2.5 - 0.05 [14-30]

2.1.2. Minimizing Noise for EMC/CE Compliance



IMPORTANT: The GI4 is a component designed to be integrated with other electronics. EMC testing must be conducted on the final product configuration.

To reduce electrical noise, observe the following motor feedback and input power wiring techniques.

1. Use shielded cable for the feedback connector. Connect the shield to the backshell at each end of the cable.
2. Mount drives and power supplies on a conductive panel. Keep wire-run lengths to a minimum.
3. Use a separate wire for each ground connection to the drive. Use the shortest possible wire length.

For additional GI4 system interconnection information, refer to [Section 2.7. System Interconnection](#).

2.2. Galvo Interface Connector

The connector pin assignment is shown in [Table 2-3](#) with detailed connection information in the following sections.

The Galvo Interface connector supports two- and three-axis XY2-100 galvo scanners. It outputs galvo clock, sync, and channel connections. You will need an interconnect cable connect the GI4 to a galvo that supports the XY2-100 Interface. Use shielded cables.

Many galvo scanner suppliers use the "no connection" pins on their XY2-100 cable to supply power to the scanner. Consult the hardware manual of the scanner to determine which pins are used to supply power and modify the interconnect cable accordingly.

Table 2-3: Galvo Interface Pinout

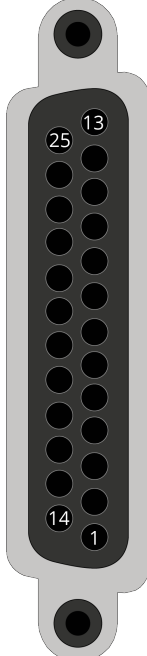
Pin #	Description	In/Out/Bi	Connector
1	Reserved	N/A	
2	Reserved	N/A	
3	Signal Common	N/A	
4	Reserved	N/A	
5	Channel 3+	Output	
6	Sync+	Output	
7	Reserved	N/A	
8	+5 V Supply (500 mA)	N/A	
9	Channel 1+	Output	
10	Channel 2+	Output	
11	Status+	Input	
12	Clock+	Output	
13	Reserved	N/A	
14	Reserved	N/A	
15	Reserved	N/A	
16	Reserved	N/A	
17	Reserved	N/A	
18	Channel 3-	Output	
19	Sync-	Output	
20	Reserved	N/A	
21	Signal Common	N/A	
22	Channel 1-	Output	
23	Channel 2-	Output	
24	Status-	Input	
25	Clock-	Output	

Table 2-4: Mating Connector Part Numbers for the Galvo Interface Connector

Mating Connector	Aerotech P/N	Third Party P/N
25-Pin D-Connector	ECK00101	FCI DB25P064TXLF
Backshell	ECK00656	Amphenol 17E-1726-2

2.3. Aux Encoders Connector

The GI4 has two auxiliary encoder input channels. Each encoder interface accepts an RS-422 differential line driver. Use the auxiliary encoder input channels with the Infinite Field of View (IFOV) and the "Marking on the Fly" functionality of the controller. You cannot use the auxiliary encoder input channels to close the position loop.

Table 2-5: Aux Encoders Connector Pinout

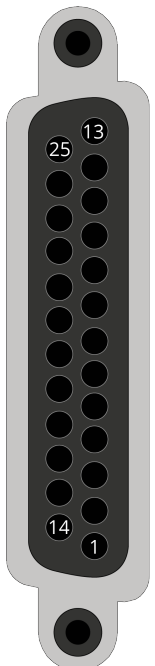
Pin #	Description	In/Out/Bi	Connector
1	Reserved	N/A	
2	Reserved	N/A	
3	Signal Common	N/A	
4	Reserved	N/A	
5	Axis Sine 2+	Bidirectional	
6	Axis Cosine 2+	Bidirectional	
7	Reserved	N/A	
8	+5 V Supply (500 mA)	N/A	
9	Axis Sine 1+	Bidirectional	
10	Axis Cosine 1+	Bidirectional	
11	Reserved	N/A	
12	Reserved	N/A	
13	Reserved	N/A	
14	Reserved	N/A	
15	Reserved	N/A	
16	Reserved	N/A	
17	Reserved	N/A	
18	Axis Sine 2-	Bidirectional	
19	Axis Cosine 2-	Bidirectional	
20	Reserved	N/A	
21	Signal Common	N/A	
22	Axis Sine 1-	Bidirectional	
23	Axis Cosine 1-	Bidirectional	
24	Reserved	N/A	
25	Reserved	N/A	

Table 2-6: Mating Connector Part Numbers for the Aux Encoders Connector

Mating Connector	Aerotech P/N	Third Party P/N
25-Pin D-Connector	ECK00101	FCI DB25P064TXLF
Backshell	ECK00656	Amphenol 17E-1726-2

2.3.1. Square Wave Encoder

The drive accepts RS-422 square wave encoder signals. Use twisted-pair wiring for the highest performance and noise immunity.

Table 2-7: Square Wave Encoder Specifications

Specification	Value
Encoder Frequency	10 MHz maximum (25 ns minimum edge separation)
x4 Quadrature Decoding	40 million counts/sec

Table 2-8: Aux Encoders Connector Pinout

Pin #	Description	In/Out/Bi
5	Axis Sine 2+	Bidirectional
6	Axis Cosine 2+	Bidirectional
9	Axis Sine 1+	Bidirectional
10	Axis Cosine 1+	Bidirectional
18	Axis Sine 2-	Bidirectional
19	Axis Cosine 2-	Bidirectional
22	Axis Sine 1-	Bidirectional
23	Axis Cosine 1-	Bidirectional

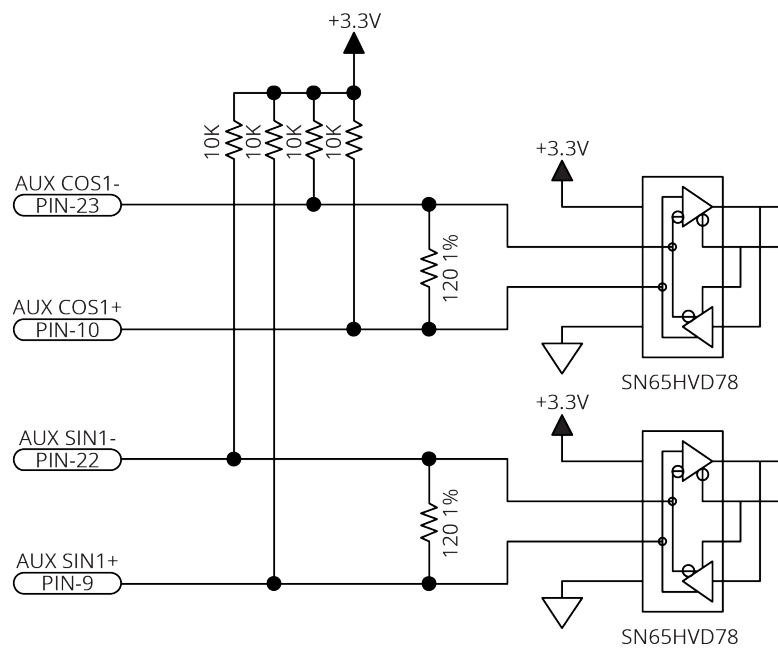


Figure 2-2: Square Wave Encoder Interface

2.4. Digital I/O Connector

This connector has two groups of four digital, optically-isolated outputs, two groups of four digital, optically-isolated inputs, and one differential high-speed user input.

Table 2-9: Digital I/O Connector Pinout

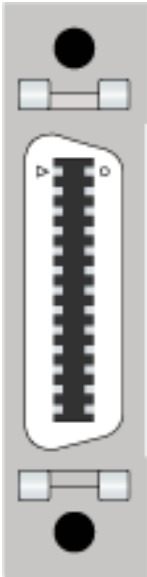
Pin #	Description	In/Out/Bi	Connector
14	Output Common for Digital Outputs 0-3	N/A	
1	Opto-Isolated Digital Output 0	Output	
15	Opto-Isolated Digital Output 1	Output	
2	Opto-Isolated Digital Output 2	Output	
16	Opto-Isolated Digital Output 3	Output	
3	Output Common for Digital Outputs 4-7	N/A	
17	Opto-Isolated Digital Output 4	Output	
4	Opto-Isolated Digital Output 5	Output	
18	Opto-Isolated Digital Output 6	Output	
5	Opto-Isolated Digital Output 7	Output	
19	Input Common for Digital Inputs 0-3	N/A	
6	Opto-Isolated Digital Input 0	Input	
20	Opto-Isolated Digital Input 1	Input	
7	Opto-Isolated Digital Input 2	Input	
21	Opto-Isolated Digital Input 3	Input	
8	Input Common for Digital Inputs 4-7	N/A	
22	Opto-Isolated Digital Input 4	Input	
9	Opto-Isolated Digital Input 5	Input	
23	Opto-Isolated Digital Input 6	Input	
10	Opto-Isolated Digital Input 7	Input	
11	High-Speed Differential Input 8-	Input	
24	High-Speed Differential Input 8+	Input	
26	Reserved	N/A	
12	Common	N/A	
13	Common	N/A	
25	+5 V	N/A	

Table 2-10: Mating Connector Part Numbers for the Digital I/O Connector

Mating Connector	Aerotech P/N	Third Party P/N
26-Pin Connector	ECK02514	10126-3000PE
Backshell	ECK02517	10326-52F0-008

2.4.1. Digital Outputs

Optically-isolated solid-state relays drive the digital outputs. You can connect the digital outputs in current sourcing or current sinking mode but you must connect all four outputs in a group in the same configuration. Refer to [Figure 2-4](#) and [Figure 2-5](#).

The digital outputs are not designed for high-voltage isolation applications and they should only be used with ground-referenced circuits.

You must install suppression diodes on digital outputs that drive relays or other inductive devices. To see an example of a current sourcing output that has diode suppression, refer to [Figure 2-4](#). To see an example of a current sinking output that has diode suppression, refer to [Figure 2-5](#).

The digital outputs have overload protection. They will resume normal operation when the overload is removed.

Table 2-11: Digital Output Specifications

Digital Output Specifications	Value
Maximum Voltage	24 V (26 V Maximum)
Maximum Sink/Source Current	250 mA/output
Output Saturation Voltage	0.9 V at maximum current
Output Resistance	3.7 Ω
Rise / Fall Time	250 μ s (2K pull up to 24V)
Reset State	Output Off (High Impedance State)

Table 2-12: Digital Output Pins on Digital I/O Connector

Pin #	Description	In/Out/Bi
14	Output Common for Digital Outputs 0-3	N/A
1	Opto-Isolated Digital Output 0	Output
15	Opto-Isolated Digital Output 1	Output
2	Opto-Isolated Digital Output 2	Output
16	Opto-Isolated Digital Output 3	Output
3	Output Common for Digital Outputs 4-7	N/A
17	Opto-Isolated Digital Output 4	Output
4	Opto-Isolated Digital Output 5	Output
18	Opto-Isolated Digital Output 6	Output
5	Opto-Isolated Digital Output 7	Output



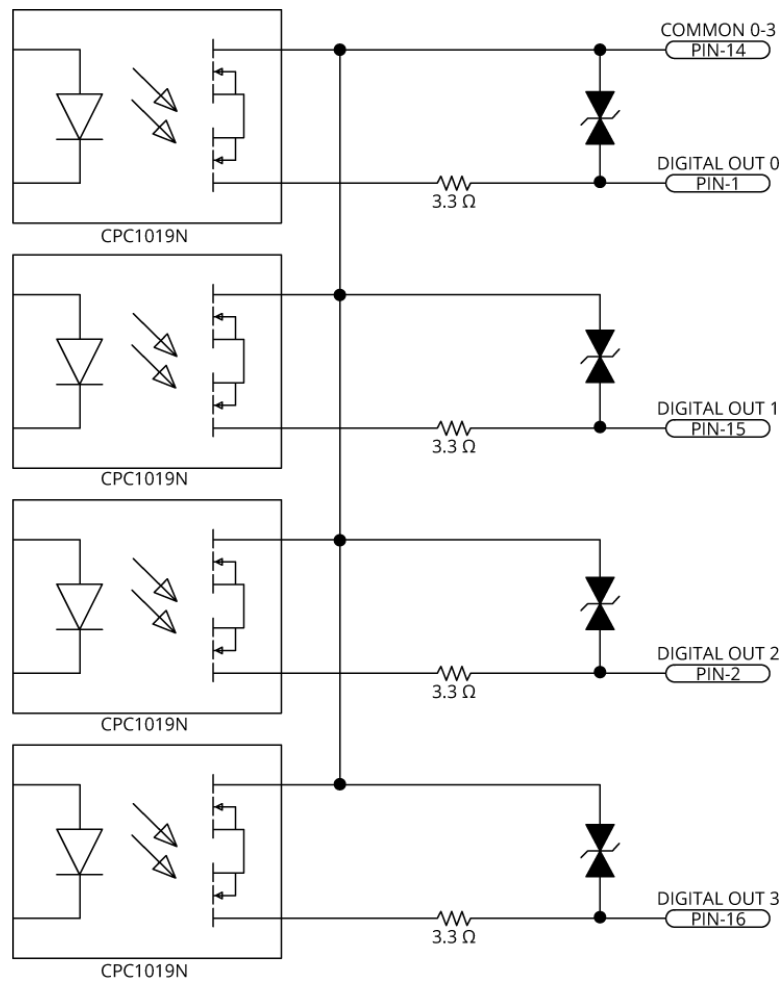


Figure 2-3: Digital Outputs Schematic

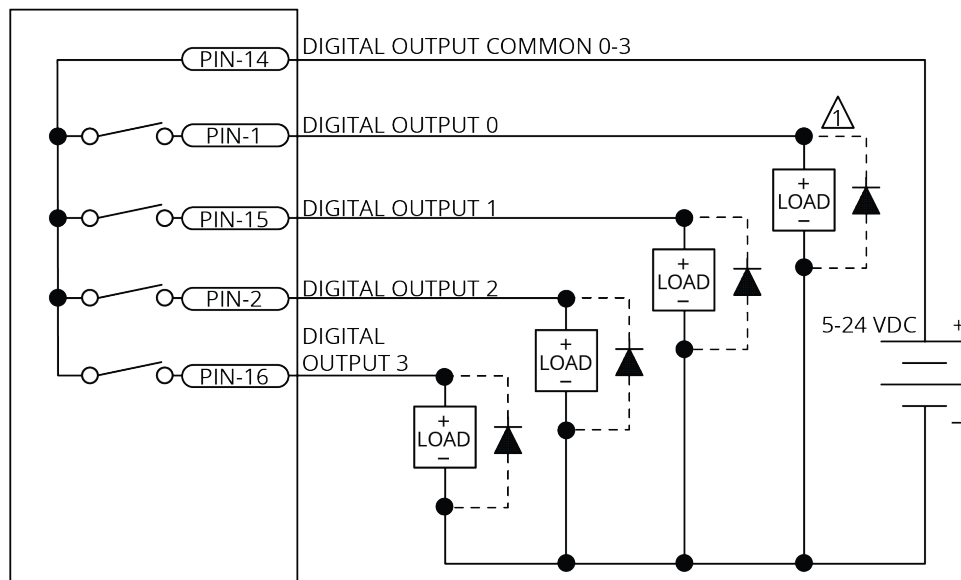

⚠️ DIODE REQUIRED ON EACH OUTPUT THAT DRIVES AN INDUCTIVE DEVICE (COIL), SUCH AS A RELAY.

Figure 2-4: Digital Outputs Connected in Current Sourcing Mode

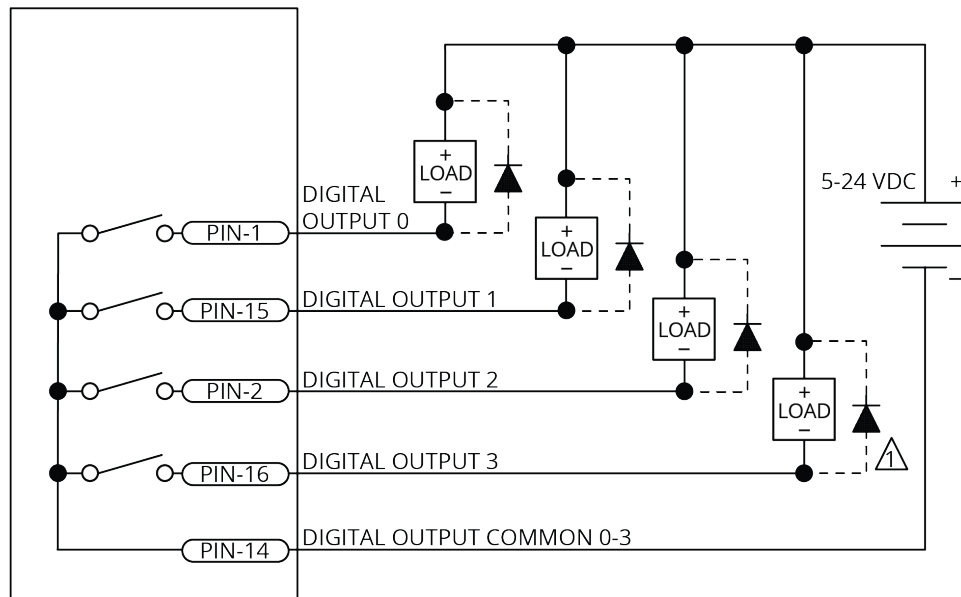

⚠️ DIODE REQUIRED ON EACH OUTPUT THAT DRIVES AN INDUCTIVE DEVICE (COIL), SUCH AS A RELAY.

Figure 2-5: Digital Outputs Connected in Current Sinking Mode

2.4.2. Digital Inputs

Input bits are arranged in groups of 4 and each group shares a common pin. This lets a group be connected to current sourcing or current sinking devices, based on the connection of the common pin in that group.

To be able to connect an input group to current sourcing devices, connect the input group's common pin to the power supply return (-). Refer to [Figure 2-7](#).

To be able to connect an input group to current sinking devices, connect the input group's common pin to the power supply source (+). Refer to [Figure 2-8](#).

The digital inputs are not designed for high-voltage isolation applications. They should only be used with ground-referenced circuits.

Table 2-13: Digital Input Specifications

Input Voltage	Approximate Input Current	Turn On Time	Turn Off Time
+5 V to +24 V	6 mA	10 μ s	43 μ s

Table 2-14: Digital Input Pins on the Digital I/O Connector

Pin #	Description	In/Out/Bi
19	Input Common for Digital Inputs 0-3	N/A
6	Opto-Isolated Digital Input 0	Input
20	Opto-Isolated Digital Input 1	Input
7	Opto-Isolated Digital Input 2	Input
21	Opto-Isolated Digital Input 3	Input
8	Input Common for Digital Inputs 4-7	N/A
22	Opto-Isolated Digital Input 4	Input
9	Opto-Isolated Digital Input 5	Input
23	Opto-Isolated Digital Input 6	Input
10	Opto-Isolated Digital Input 7	Input

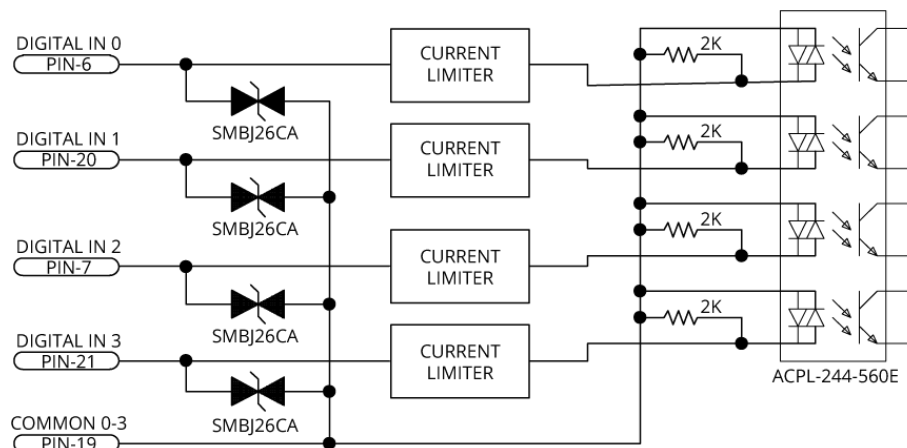


Figure 2-6: Digital Inputs Schematic

Each group of four inputs must be connected in an all sourcing or all sinking configuration.

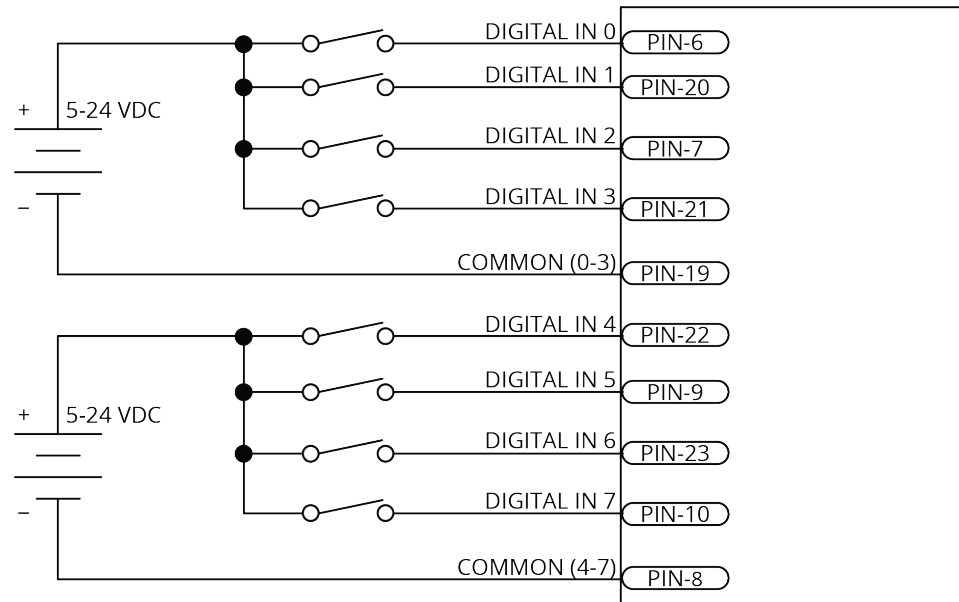


Figure 2-7: Digital Inputs Connected to Current Sourcing (PNP) Devices

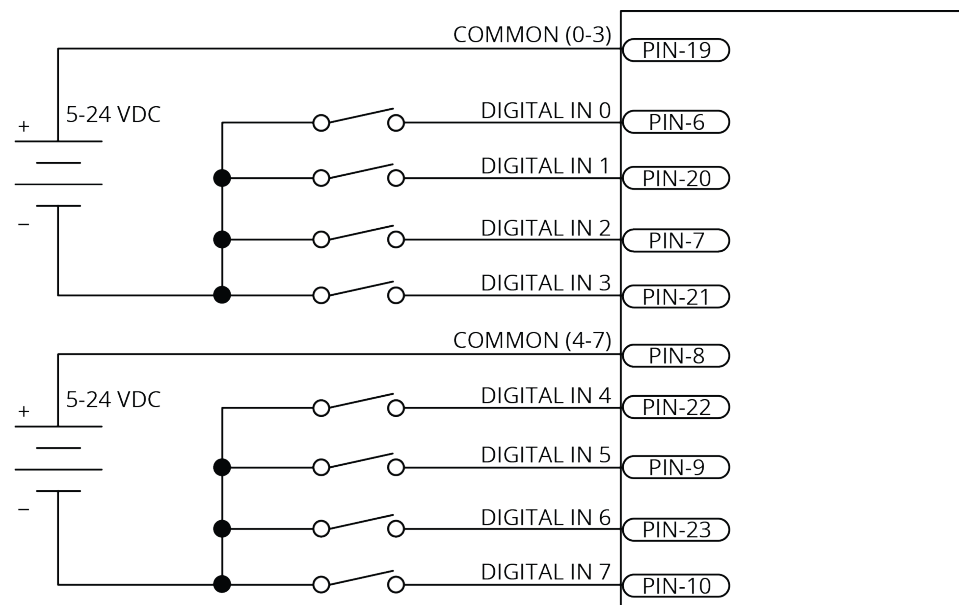


Figure 2-8: Digital Inputs Connected to Current Sinking (NPN) Devices

2.4.3. High-Speed User Input

High-speed input 8 can be used as a general purpose input or as the trigger signal for high speed data collection. Refer to the DriveDataCaptureConfigureTrigger() function topic in the Help file for more information.

Table 2-15: High-Speed Input Specifications

Specification	Value
Input Voltage	5V - 24 V input voltages
Input Current	10 mA
Input Device	HCPL-0630
Delay	50 nsec

Table 2-16: High-Speed Input Pins on the Digital I/O Connector

Pin #	Description	In/Out/Bi
11	High-Speed Differential Input 8-	Input
24	High-Speed Differential Input 8+	Input

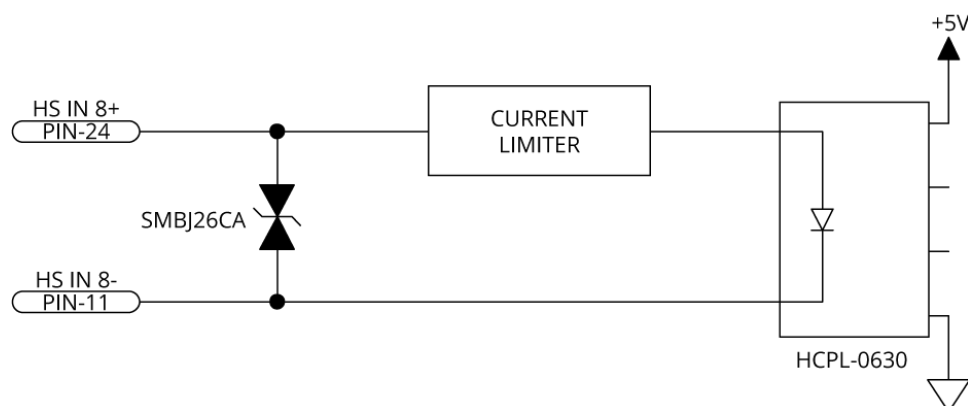


Figure 2-9: High-Speed Input

2.5. Analog I/O and Laser Interface Connector

This connector has four analog inputs, two analog outputs, three laser outputs, and one PSO external sync input.

Table 2-17: Analog I/O and Laser Interface Connector Pinout

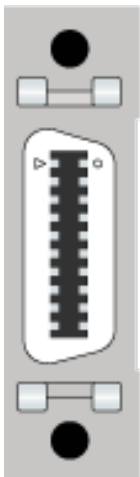
Pin #	Description	In/Out/Bi	Connector
4	+5 Volt (500 mA max)	N/A	
11	Laser Output 1 / PSO Output ⁽¹⁾ (TTL)	Output	
1	Common	N/A	
12	Laser Output 2	Output	
2	Common	N/A	
13	Laser Output 3	Output	
3	Common	N/A	
14	PSO External Sync	Input	
15	Analog Output 0	Output	
5	Analog Common	N/A	
16	Analog Output 1	Output	
6	Analog Common	N/A	
7	Analog Input 0+ (Differential)	Input	
17	Analog Input 0- (Differential)	Input	
8	Analog Input 1+ (Differential)	Input	
18	Analog Input 1- (Differential)	Input	
9	Analog Input 2+ (Differential)	Input	
19	Analog Input 2- (Differential)	Input	
10	Analog Input 3+ (Differential)	Input	
20	Analog Input 3- (Differential)	Input	
(1) Refer to Section 2.5.2. for more information.			

Table 2-18: Mating Connector Part Numbers for the Laser Interface Connector

Mating Connector	Aerotech P/N	Third Party P/N
20-Pin Connector	ECK02515	10120-3000PE
Backshell	ECK02518	10320-52F0-008

2.5.1. Laser Interface Outputs

Three laser output signals are available as 5V TTL signals. These signals are active high and are driven to 5V when the laser output is turned on.

The laser outputs can be configured for different laser modes. Refer to the `GalvoConfigureLaserMode()` function topic in the Help file for more information.



WARNING: After you install this product, you must tell the operator about all applicable safety conditions and safety information. Refer the operator to the laser manual for safety information about the laser.

Table 2-19: Laser Output Pins on the Analog I/O and Laser Interface Connector

Pin #	Description	In/Out/Bi
11	Laser Output 1 / PSO Output (TTL)	Output
1	Common	N/A
12	Laser Output 2	Output
2	Common	N/A
13	Laser Output 3	Output
3	Common	N/A

Table 2-20: Laser Output Specifications

Specification	Value
Output	5 V, 50 mA (max)
Maximum Frequency	12.5 MHz
Output Latency	5 ns

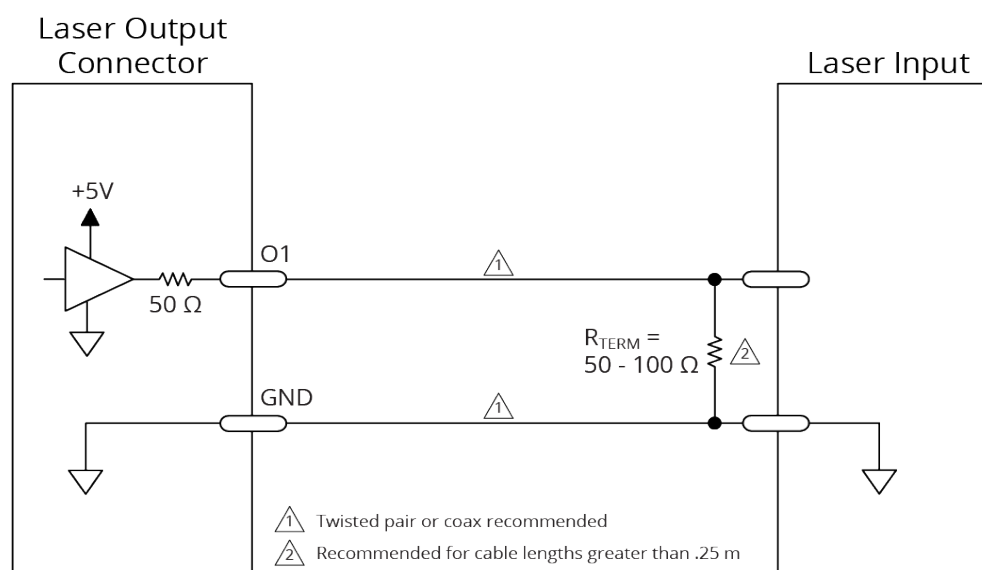


Figure 2-10: TTL Output

2.5.2. Position Synchronized Output (PSO) Interface

This output signal is a 5V TTL signal which is used to drive an opto coupler or general purpose TTL input. This signal is active high and is driven to 5V when a PSO fire event occurs.

You can use the external PSO synchronization functions to synchronize waveform generation with an external synchronization signal. When you activate this feature, the PSO Waveform module will not generate the configured waveform when an output event is received until the rising edge of the synchronization signal occurs.

Table 2-21: PSO Specifications

Specification	Value
Output	5 V, 50 mA (max)
Maximum PSO Output (Fire) Frequency	12.5 MHz
Output Latency [Fire event to output change]	5 ns

Table 2-22: PSO External Sync Specifications

Specification	Value
Voltage	3.3 VDC
Frequency	25 MHz Maximum
On Time	20 ns Minimum

Table 2-23: PSO Output Pins on the Analog I/O and Laser Interface Connector

Pin #	Description	In/Out/Bi
11	Laser Output 1 / PSO Output (TTL)	Output
1	Common	N/A
14	PSO External Sync	Input

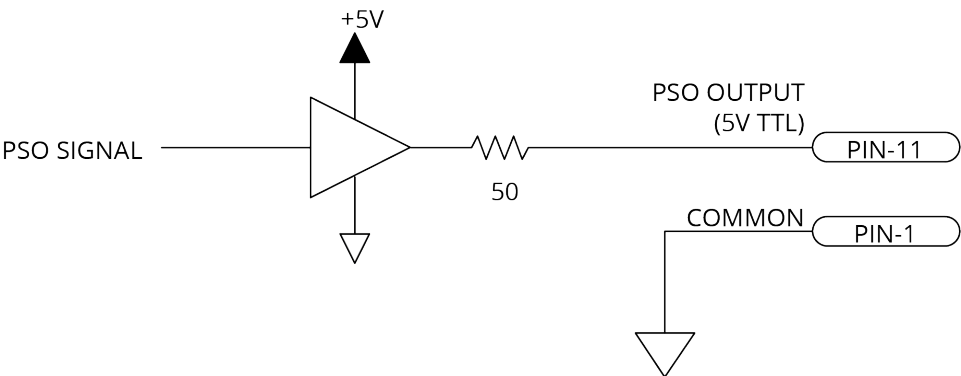


Figure 2-11: PSO TTL Outputs Schematic

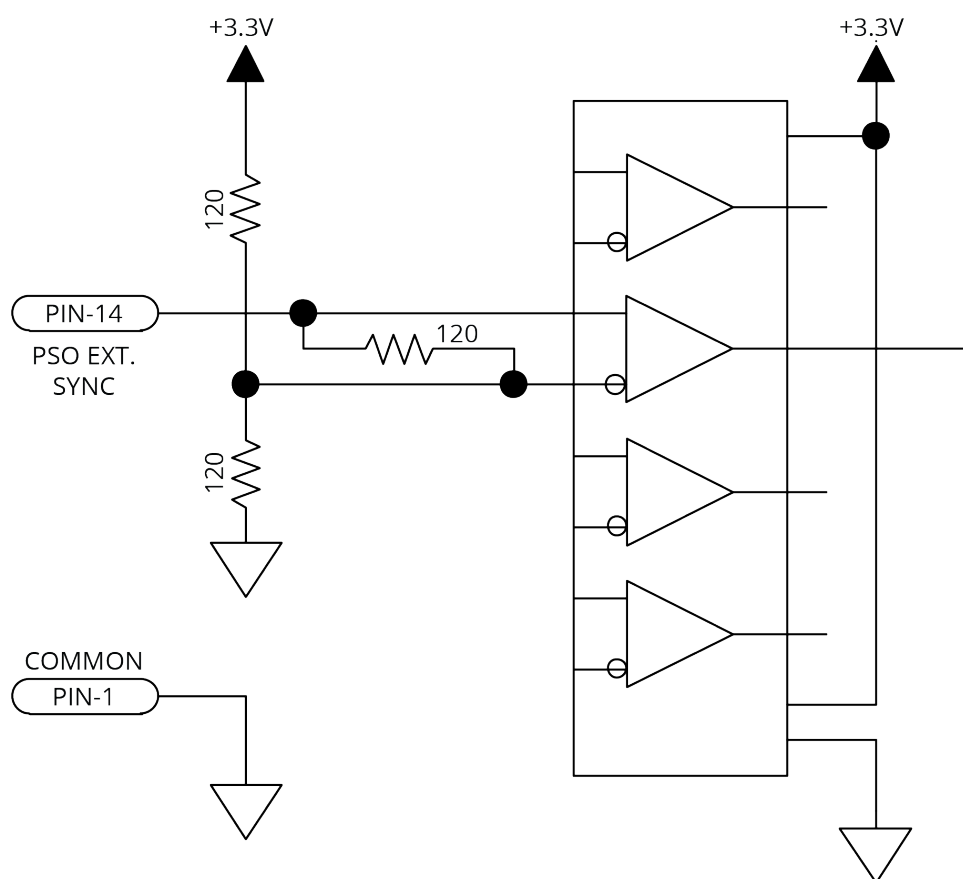


Figure 2-12: PSO External Sync Input Schematic

2.5.3. Analog Outputs

The analog outputs can be set from within a program or they can be configured to echo the state of select servo loop nodes.

The analog outputs are set to zero when you power on the system or reset the drive.

Table 2-24: Analog Output Specifications

Specification	Value
Output Voltage	-10 V to +10 V
Output Current	5 mA
Resolution (bits)	16 bits

Table 2-25: Analog Output Pins on the Analog I/O and Laser Interface Connector

Pin #	Description	In/Out/Bi
15	Analog Output 0	Output
5	Analog Common	N/A
16	Analog Output 1	Output
6	Analog Common	N/A

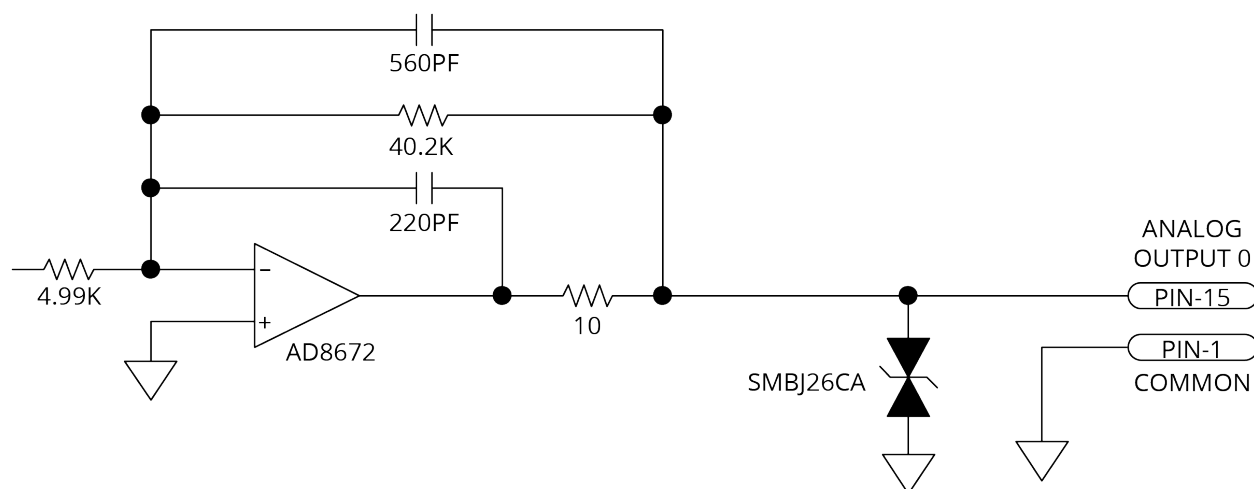


Figure 2-13: Analog Outputs Schematic

2.5.4. Analog Inputs (Differential)

To interface to a single-ended, non-differential voltage source, connect the signal common of the source to the negative input and connect the analog source signal to the positive input. A floating signal source must be referenced to the analog common. Refer to [Figure 2-14](#).

Table 2-26: Analog Input Specifications

Specification	Value
(AI+) - (AI-)	+10 V to -10 V ⁽¹⁾
Resolution (bits)	16 bits
Input Impedance	1 M Ω
1. Signals outside of this range may damage the input	

Table 2-27: Analog Input Pins on the Analog I/O and Laser Interface Connector

Pin #	Description	In/Out/Bi
6	Analog Common	N/A
7	Analog Input 0+ (Differential)	Input
17	Analog Input 0- (Differential)	Input
8	Analog Input 1+ (Differential)	Input
18	Analog Input 1- (Differential)	Input
9	Analog Input 2+ (Differential)	Input
19	Analog Input 2- (Differential)	Input
10	Analog Input 3+ (Differential)	Input
20	Analog Input 3- (Differential)	Input

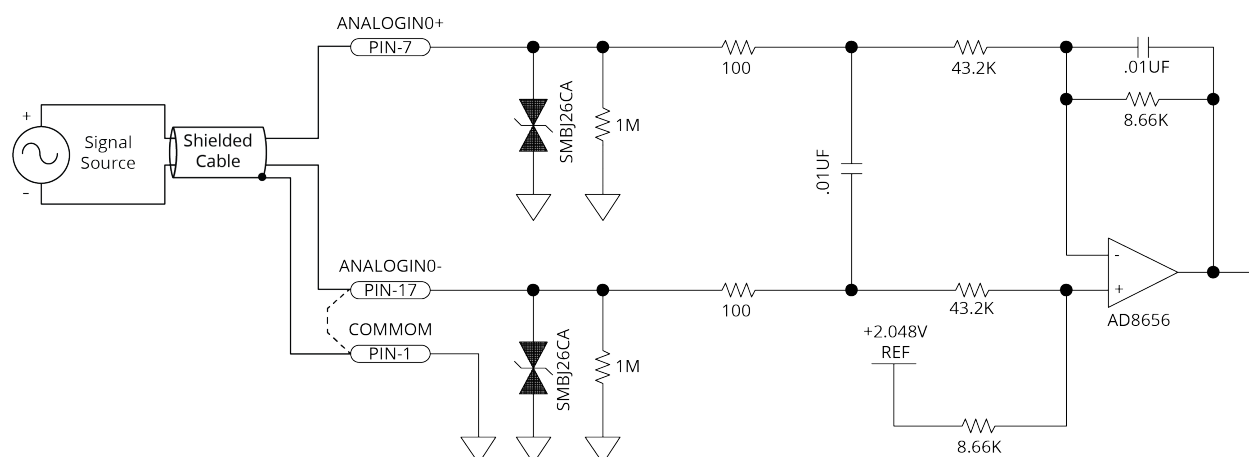


Figure 2-14: Analog Inputs Schematic

2.5.5. Sync Port

The GI4 contains two Sync ports, labeled A and B.

The Sync port is a bi-directional high speed proprietary interface that lets you transmit encoder signals between drives. This is typically used for IFOV to track the positions of your Automation1 servo axes in combination with your galvo scanner. You can use the FeedbackSetup parameter to configure the Sync ports as IFOV Inputs.

To avoid signal contention, all Sync ports default to the input state during reset and immediately after power is applied to the drive.

The Sync port uses low-voltage differential signaling (LVDS) and standard USB 3.0 type A (cross over) cables.

Table 2-28: Sync Port Cables

Part Number	Description
CBL-SYNC-3	Length 3 dm; Connectors: USB Type A to USB Type A
CBL-SYNC-5	Length 5 dm; Connectors: USB Type A to USB Type A
CBL-SYNC-7	Length 7 dm; Connectors: USB Type A to USB Type A
CBL-SYNC-10	Length 10 dm; Connectors: USB Type A to USB Type A

2.6. HyperWire Interface

The HyperWire bus is the high-speed communications connection from the controller. It operates at 2 gigabits per second. The controller sends all command and configuration information through the HyperWire bus.

HyperWire cables can be safely connected to or disconnected from a HyperWire port while the PC and/or drive is powered on. However, any changes to the HyperWire network topology will disrupt communication and you must reset the controller to re-establish communication.



WARNING: Do not connect or disconnect HyperWire cables while you are loading firmware or damage to the drives may occur.

Table 2-29: HyperWire Card Part Number

Part Number	Description
HYPERWIRE-PCIE	HyperWire adapter, PCIe x4 interface

Table 2-30: HyperWire Cable Part Numbers

Part Number	Description
HYPERWIRE-AO10-5	HyperWire cable, active optical, 0.5 m
HYPERWIRE-AO10-10	HyperWire cable, active optical, 1.0 m
HYPERWIRE-AO10-30	HyperWire cable, active optical, 3.0 m
HYPERWIRE-AO10-50	HyperWire cable, active optical, 5.0 m
HYPERWIRE-AO10-200	HyperWire cable, active optical, 20.0 m

2.7. System Interconnection

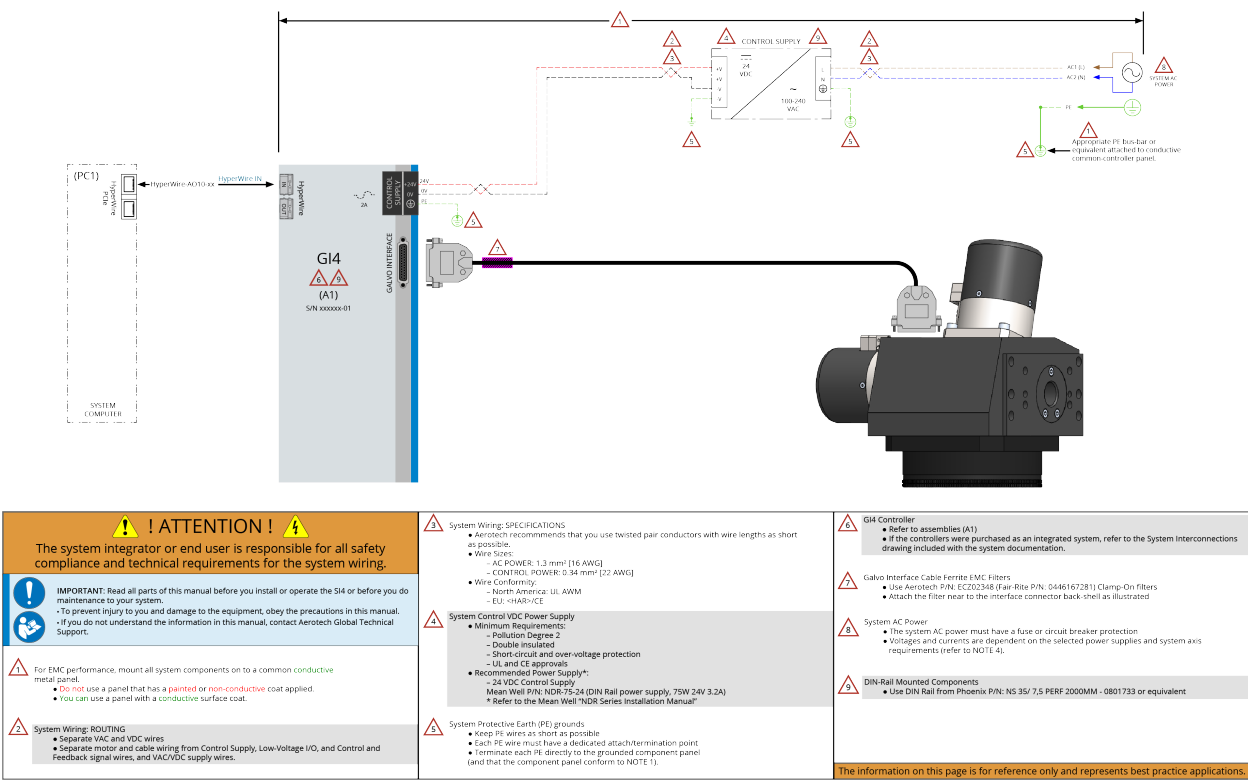


Figure 2-15: System Interconnection Drawing (Best Practice)

2.8. PC Configuration and Operation Information

For more information about hardware requirements, PC configuration, programming, system operation, and utilities, refer to the Help file.

This page intentionally left blank.

Chapter 3: Maintenance



IMPORTANT: For your own safety and for the safety of the equipment:

- Do not remove the cover of the GI4
- Do not attempt to access the internal components.

A fuse that needs to be replaced indicates that there is a more serious problem with the system or setup. Contact Global Technical Support for assistance.

Table 3-1: LED Description

LED	Color	Description
PWR	GREEN	The light will illuminate and remain illuminated while power is applied.
ENB/FLT	GREEN	Any of the axes are Enabled.
	RED	Any of the axes are in a Fault Condition.
	GREEN/RED (alternates)	Any of the axes are Enabled in a Fault Condition. or The light is configured to blink for setup.

Table 3-2: Troubleshooting

Symptom	Possible Cause and Solution
No Communication	Make sure the power LED is illuminated (this indicates that power is present).
	Make sure that all communication cables (HyperWire, for example) are fully inserted in their ports.

3.1. Preventative Maintenance

Do an inspection of the GI4 and the external wiring one time each month. It might be necessary to do more frequent inspections based on:

- The operating conditions of the system.
- How you use the system.

Table 3-3: Preventative Maintenance

Check	Action to be Taken
Examine the chassis for hardware and parts that are damaged or loose. It is not necessary to do an internal inspection unless you think internal damage occurred.	Repair all damaged parts.
Do an inspection of the cooling vents.	Remove all material that collected in the vents.
Examine the work area to make sure there are no fluids and no electrically conductive materials.	Do not let fluids and electrically conductive material go into the chassis.
Examine all cables and connections to make sure they are correct.	Make sure that all connections are correctly attached and not loose. Replace cables that are worn. Replace all broken connectors.

Cleaning



DANGER: Before you clean the GI4, disconnect the electrical power from the drive.

Use a clean, dry, soft cloth to clean the chassis of the GI4. If necessary, use a cloth that is moist with water or isopropyl alcohol. If you use a moist cloth, make sure that moisture does not go into the chassis. Also make sure that it does not go onto the outer connectors and components. Internal contamination from the cleaning solution can cause corrosion and electrical short circuits.

Do not clean the labels with a cleaning solution because it might remove the label information.

Appendix A: Warranty and Field Service

Aerotech, Inc. warrants its products to be free from harmful defects caused by faulty materials or poor workmanship for a minimum period of one year from date of shipment from Aerotech. Aerotech's liability is limited to replacing, repairing or issuing credit, at its option, for any products that are returned by the original purchaser during the warranty period. Aerotech makes no warranty that its products are fit for the use or purpose to which they may be put by the buyer, whether or not such use or purpose has been disclosed to Aerotech in specifications or drawings previously or subsequently provided, or whether or not Aerotech's products are specifically designed and/or manufactured for buyer's use or purpose. Aerotech's liability on any claim for loss or damage arising out of the sale, resale, or use of any of its products shall in no event exceed the selling price of the unit.

THE EXPRESS WARRANTY SET FORTH HEREIN IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, BY OPERATION OF LAW OR OTHERWISE. IN NO EVENT SHALL AEROTECH BE LIABLE FOR CONSEQUENTIAL OR SPECIAL DAMAGES.

Return Products Procedure

Claims for shipment damage (evident or concealed) must be filed with the carrier by the buyer. Aerotech must be notified within thirty (30) days of shipment of incorrect material. No product may be returned, whether in warranty or out of warranty, without first obtaining approval from Aerotech. No credit will be given nor repairs made for products returned without such approval. A "Return Materials Authorization (RMA)" number must accompany any returned product(s). The RMA number may be obtained by calling an Aerotech service center or by submitting the appropriate request available on our website (www.aerotech.com). Products must be returned, prepaid, to an Aerotech service center (no C.O.D. or Collect Freight accepted). The status of any product returned later than thirty (30) days after the issuance of a return authorization number will be subject to review.

Visit [Global Technical Support Portal](#) for the location of your nearest Aerotech Service center.

Returned Product Warranty Determination

After Aerotech's examination, warranty or out-of-warranty status will be determined. If upon Aerotech's examination a warranted defect exists, then the product(s) will be repaired at no charge and shipped, prepaid, back to the buyer. If the buyer desires an expedited method of return, the product(s) will be shipped collect. Warranty repairs do not extend the original warranty period.

Fixed Fee Repairs - Products having fixed-fee pricing will require a valid purchase order or credit card particulars before any service work can begin.

All Other Repairs - After Aerotech's evaluation, the buyer shall be notified of the repair cost. At such time the buyer must issue a valid purchase order to cover the cost of the repair and freight, or authorize the product(s) to be shipped back as is, at the buyer's expense. Failure to obtain a purchase order number or approval within thirty (30) days of notification will result in the product(s) being returned as is, at the buyer's expense.

Repair work is warranted for ninety (90) days from date of shipment. Replacement components are warranted for one year from date of shipment.

Rush Service

At times, the buyer may desire to expedite a repair. Regardless of warranty or out-of-warranty status, the buyer must issue a valid purchase order to cover the added rush service cost. Rush service is subject to Aerotech's approval.

On-site Warranty Repair

If an Aerotech product cannot be made functional by telephone assistance or by sending and having the customer install replacement parts, and cannot be returned to the Aerotech service center for repair, and if Aerotech determines the problem could be warranty-related, then the following policy applies:

- Aerotech will provide an on-site Field Service Representative in a reasonable amount of time, provided that the customer issues a valid purchase order to Aerotech covering all transportation and subsistence costs. For warranty field repairs, the customer will not be charged for the cost of labor and material. If service is rendered at times other than normal work periods, then special rates apply.
- If during the on-site repair it is determined the problem is not warranty related, then the terms and conditions stated in the following "On-Site Non-Warranty Repair" section apply.

On-site Non-Warranty Repair

If any Aerotech product cannot be made functional by telephone assistance or purchased replacement parts, and cannot be returned to the Aerotech service center for repair, then the following field service policy applies:

- Aerotech will provide an on-site Field Service Representative in a reasonable amount of time, provided that the customer issues a valid purchase order to Aerotech covering all transportation and subsistence costs and the prevailing labor cost, including travel time, necessary to complete the repair.

Service Locations

<http://www.aerotech.com/contact-sales.aspx?mapState=showMap>

USA, CANADA, MEXICO
Aerotech, Inc.
Global Headquarters

CHINA
Aerotech China
Full-Service Subsidiary

GERMANY
Aerotech Germany
Full-Service Subsidiary

TAIWAN
Aerotech Taiwan
Full-Service Subsidiary

UNITED KINGDOM
Aerotech United Kingdom
Full-Service Subsidiary

Appendix B: Revision History

Revision	Description
1.00	New Manual

This page intentionally left blank.

Index

2		
2011/65/EU	7	
2014/35/EU	7	
A		
Altitude	23	
Ambient Temperature	23	
Analog I/O and Laser Interface Connector Pinout	38	
Analog Input Pins on the Analog I/O and Laser Interface Connector Pinout	43	
Analog Input Specifications (Digital / Analog I/O B Connector)	43	
Analog Inputs (Digital / Analog I/O B Connector)	43	
Analog Inputs Schematic	43	
Analog Output Pins on the Analog I/O and Laser Interface Connector Pinout	42	
Analog Output Specifications (Digital and Analog I/O Connector)	42	
Analog Outputs (Digital and Analog I/O Connector)	42	
Analog Outputs Schematic	42	
Aux Encoders Connector		
Mating Connector Part Numbers	29	
Aux Encoders Connector Pinout	29-30	
C		
Cables		
HyperWire	45	
Sync Port	44	
cables, examining	50	
Check for fluids or electrically conductive material exposure	50	
Cleaning	50	
connections, examining	50	
Control Supply Connections	26	
Control Supply Connector	26	
Mating Connector Part Numbers	26	
Wiring Specifications	26	
Control Supply specifications	17	
cooling vents, inspecting	50	
Customer order number	25	
D		
Declaration of Conformity	7	
Digital / Analog I/O Connectors		
Analog Inputs (Differential)	43	
Digital and Analog I/O Connector		
Analog Outputs	42	
Digital I/O Connector		
Mating Connector Part Numbers	31,38	
Digital I/O Connector Pinout	31	
Digital Input Pins on the Digital I/O Connector	35	
Digital Input Specifications	35	
Digital Inputs	35	
Digital Inputs Connected to a Current Sinking Device	36	
Digital Inputs Connected to a Current Sourcing Device	36	
Digital Inputs Schematic	35	
Digital Output Connector Pinout	32	
Digital Output Specifications	32	
Digital Outputs	32	
Digital Outputs Connected in Current Sinking Mode	34	
Digital Outputs Connected in Current Sourcing Mode	34	
Digital Outputs Schematic	33	
Dimensions	19	
Dimensions (2-Axis)	19-20	
DIN Rail		
Mounting Procedure	21	
P/N		
EAM00914	21	
DIN Rail Clip Kit		
P/N		
HyperWire-DIN	21	
Drawing number	25	
Drive and Software Compatibility	24	
E		
EAM00914 (DIN Rail Part Number)	21	
Electrical Specifications	17	
EMC/CE Compliance	27	
Enclosure	18	
Environmental Specifications	23	
EU 2015/863	7	
examining parts		
cables	50	
connections	50	

examining, dangerous fluids	50	HyperWire-DIN (DIN Rail Clip Kit Part Number)	21
examining, dangerous material	50		
		I	
F		Input Power Connections	26
Feature Summary	15	inspecting cooling vents	50
Feedback Connector		Inspection	50
RS-422 Line Driver Encoder	30	Installation and Configuration	25
Square Wave Encoder	30	Installation Connection Overview (OEM)	12
Figure		Installation Connection Overview (standard)	11
Analog Inputs Schematic	43	Installation Overview	11
Analog Outputs Schematic	42	Introduction	13
Control Supply Connections	26	IP54 Compliant	18
Digital Inputs Connected to a Current Sinking Device	36		
Digital Inputs Connected to a Current Sourcing Device	36	L	
Digital Inputs Schematic	35	Laser Interface Outputs	39
Digital Outputs Schematic	33	Laser Output Pins on the Analog I/O and Laser Interface Connector	39
Dimensions (2-Axis)	19-20	Laser Output Specifications	39
High-Speed Input	37		
Outputs Connected in Current Sinking Mode	34	M	
Outputs Connected in Current Sourcing Mode	34	Maintenance	49
PSO External Sync Input Schematic	41	material, electrically conductive	50
PSO TTL Outputs Schematic	40	Mating Connector P/N	
Square Wave Encoder Inputs Schematic (Axis Connector)	30	Aux Encoders Connector	29
TTL Output	39	Control Supply Connector	26
TTL Outputs Schematic (PSO)	40	Digital I/O Connector	31,38
fluids, dangerous	50	Galvo Interface Connector	28
Functional Diagram	16	Mechanical Specifications	18
		Minimizing Conducted, Radiated, and System Noise for EMC/CE Compliance	27
G		Modes of Operation	17
Galvo Interface		Mounting and Cooling	18
Pinout	28	Mounting Hardware	18
Galvo Interface Connector	28	Mounting Orientation	18
Mating Connector Part Numbers	28		
		O	
H		OEM Mounting Procedure	22
High-Speed Input	37	Operation	23
High-Speed Input Pins on the Digital I/O Connector	37	Overview	13
High-Speed Input Specifications	37		
High-Speed User Input	37	P	
Humidity	23	packing list	25
HyperWire	45	PC Configuration and Operation Information	47
Cable Part Numbers	45		
Card Part Number	45		

x

This page intentionally left blank.