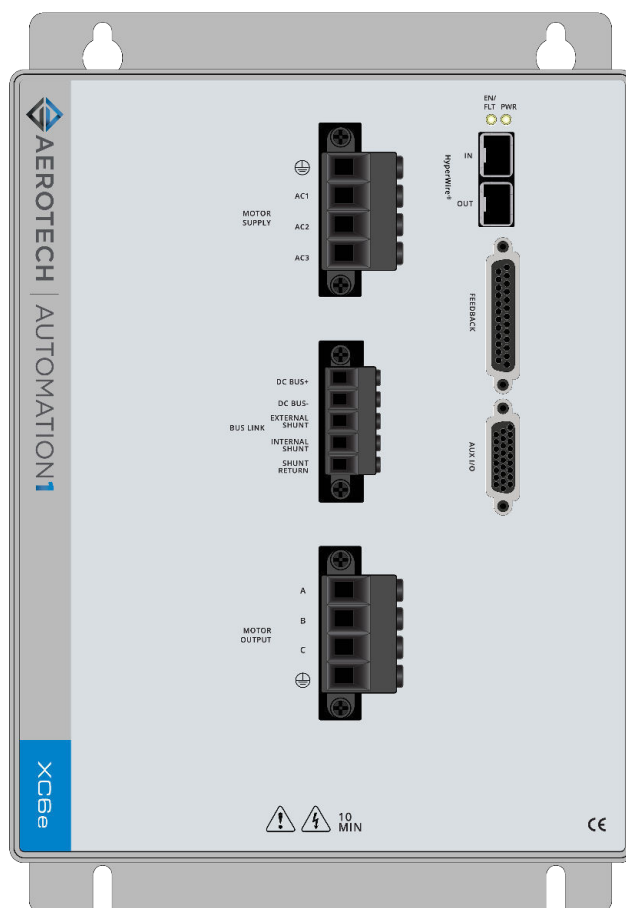
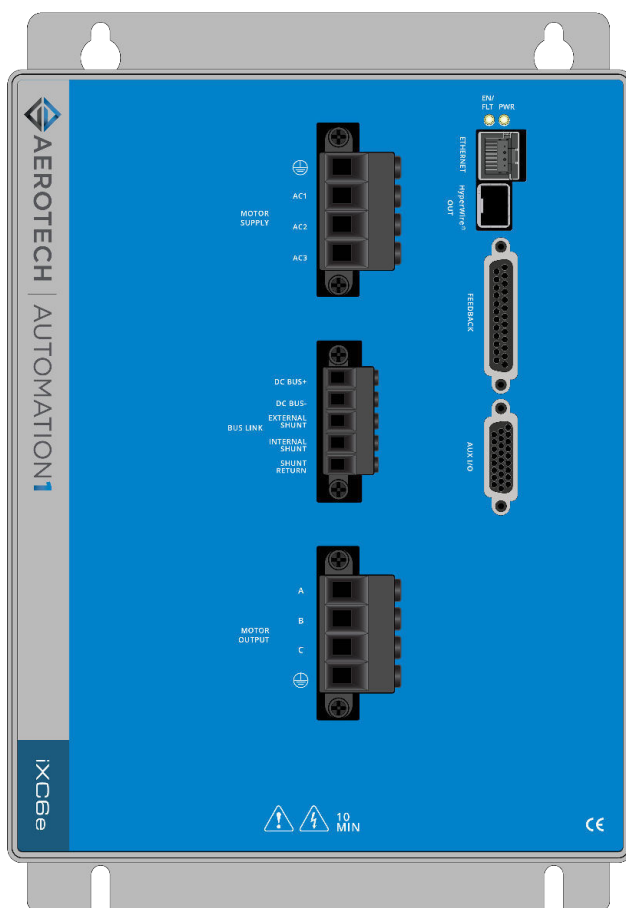




Automation1 iXC6e and XC6e High-Powered PWM Digital Drives

HARDWARE MANUAL

Revision 1.05



GLOBAL TECHNICAL SUPPORT

Go to the [Global Technical Support Portal](#) for information and support about your Aerotech, Inc. products. The website supplies software, product manuals, Help files, training schedules, and PC-to-PC remote technical support. If necessary, you can complete Product Return (RMA) forms and get information about repairs and spare or replacement parts. To get help immediately, contact a service office or your sales representative. Include your customer order number in your email or have it available before you call.

This manual contains proprietary information and may not be reproduced, disclosed, or used in whole or in part without the express written permission of Aerotech, Inc. Product names mentioned herein are used for identification purposes only and may be trademarks of their respective companies.

Copyright © 2020-2022, Aerotech, Inc., All rights reserved.



Table of Contents

Automation1 iXC6e and XC6e High-Powered PWM Digital Drives	1
Table of Contents	3
List of Figures	5
List of Tables	7
EU Declaration of Conformity	9
Safety Procedures and Warnings	10
Handling and Storage	12
Installation Overview	13
Chapter 1: iXC6e/XC6e Overview	15
1.1. Electrical Specifications	19
1.1.1. System Power Requirements	20
1.2. Mechanical Specifications	21
1.2.1. Mounting and Cooling	21
1.2.2. Dimensions	22
1.3. Environmental Specifications	24
1.4. Drive and Software Compatibility	24
Chapter 2: Installation and Configuration	25
2.1. Input Power Connections	25
2.1.1. Control Supply Connector	25
2.1.2. Motor Supply Connector	26
2.1.3. Minimizing Noise for EMC/CE Compliance	28
2.1.4. Inrush Current Limiting	29
2.2. Motor Power Output Connector	32
2.2.1. Brushless Motor Connections	33
2.2.1.1. Brushless Motor Powered Motor and Feedback Phasing	34
2.2.1.2. Brushless Motor Unpowered Motor and Feedback Phasing	35
2.3. Feedback Connector	36
2.3.1. Primary Encoder Inputs	37
2.3.1.1. Square Wave Encoder (Primary)	38
2.3.1.2. Absolute Encoder (Primary)	39
2.3.1.3. Sine Wave Encoder (Primary) [-MX2/-MX3 Option]	40
2.3.1.4. Encoder Phasing	42
2.3.2. Hall-Effect Inputs	43
2.3.3. Thermistor Input	44
2.3.4. Encoder Fault Input	45
2.3.5. End of Travel and Home Limit Inputs	46
2.3.5.1. End of Travel and Home Limit Phasing	48
2.3.6. Brake Outputs	49
2.4. Safe Torque Off Input (STO)	50
2.4.1. STO Standards	52
2.4.2. STO Functional Description	53
2.4.3. STO Startup Validation Testing	54
2.4.4. STO Diagnostics	55
2.5. Auxiliary I/O Connector	56
2.5.1. Auxiliary Encoder Interface	57
2.5.1.1. Square Wave Encoder (Auxiliary)	58
2.5.1.2. Absolute Encoder (Auxiliary)	59
2.5.1.3. Sine Wave Encoder (Auxiliary) [-MX3 Option]	60
2.5.2. Position Synchronized Output (PSO)	62
2.5.3. Digital Outputs	64
2.5.4. Digital Inputs	67
2.5.5. High-Speed Inputs	69
2.5.6. Analog Output 0	70
2.5.7. Analog Input 0 (Differential)	71
2.6. Brake Power Supply Connector	72
2.7. HyperWire Interface	73
2.8. Shunt Options	74

2.9. Sync Port	78
2.10. Industrial Ethernet (iXC6e Only)	78
2.11. System Interconnection	79
2.12. PC Configuration and Operation Information	82
Chapter 3: -EB1 Option Expansion Board	83
3.1. Digital Outputs [-EB1]	84
3.2. Digital Inputs [-EB1]	88
3.3. Analog Outputs [-EB1]	91
3.4. Analog Inputs [-EB1]	92
3.5. PSO Interface [-EB1]	93
Chapter 4: Cables and Accessories	95
4.1. Joystick Interface	96
4.2. Handwheel Interface	98
Chapter 5: Maintenance	99
5.1. Preventative Maintenance	100
5.2. Fuse Specifications	100
Appendix A: Warranty and Field Service	101
Appendix B: Revision History	103
Index	105

List of Figures

Figure 1-1:	iXC6e High Power Networked Digital Drive	15
Figure 1-2:	XC6e High Power Networked Digital Drive	16
Figure 1-3:	Functional Diagram	18
Figure 1-4:	Dimensions	22
Figure 1-5:	Dimensions [-EB1]	23
Figure 2-1:	Control Supply Connections	25
Figure 2-2:	Motor Supply Connections	26
Figure 2-3:	Inrush Limiting Circuit External to Drive	29
Figure 2-4:	Brushless Motor Configuration	33
Figure 2-5:	Positive Motor Direction	34
Figure 2-6:	Encoder and Hall Signal Diagnostics	34
Figure 2-7:	Brushless Motor Phasing Oscilloscope Example	35
Figure 2-8:	Brushless Motor Phasing Goal	35
Figure 2-9:	Square Wave Encoder Schematic (Feedback Connector)	38
Figure 2-10:	Absolute Encoder Schematic (Feedback Connector)	39
Figure 2-11:	Sine Wave Encoder Phasing Reference Diagram	40
Figure 2-12:	Sine Wave Encoder Schematic (Feedback Connector)	41
Figure 2-13:	Encoder Phasing Reference Diagram (Standard)	42
Figure 2-14:	Position Feedback in the Diagnostic Display	42
Figure 2-15:	Hall-Effect Inputs Schematic (Feedback Connector)	43
Figure 2-16:	Thermistor Input Schematic (Feedback Connector)	44
Figure 2-17:	Encoder Fault Input Schematic (Feedback Connector)	45
Figure 2-18:	End of Travel and Home Limit Input Connections	47
Figure 2-19:	End of Travel and Home Limit Input Schematic (Feedback Connector)	47
Figure 2-20:	End of Travel and Home Limit Input Diagnostic Display	48
Figure 2-21:	Brake Connected to the 25-Pin Feedback Connector (Typical)	49
Figure 2-22:	Typical STO Configuration	51
Figure 2-23:	STO Timing	55
Figure 2-24:	Square Wave Encoder Interface (Aux I/O Connector)	58
Figure 2-25:	Absolute Encoder Schematic (Auxiliary I/O Connector)	59
Figure 2-26:	Sine Wave Encoder Phasing Reference Diagram	60
Figure 2-27:	Sine Wave Encoder Schematic (Auxiliary I/O Connector)	61
Figure 2-28:	PSO Interface	63
Figure 2-29:	Digital Output Schematic (Aux I/O Connector)	65
Figure 2-30:	Digital Outputs Connected in Current Sourcing Mode	66
Figure 2-31:	Digital Outputs Connected in Current Sinking Mode	66
Figure 2-32:	Digital Inputs Schematic (Aux I/O Connector)	67
Figure 2-33:	Digital Inputs Connected to Current Sourcing Devices	68
Figure 2-34:	Digital Inputs Connected to Current Sinking Devices	68
Figure 2-35:	High-Speed Inputs	69
Figure 2-36:	Analog Output 0 Schematic	70
Figure 2-37:	Analog Input 0 Schematic	71
Figure 2-38:	Drive-Based System Wiring Drawing (Best Practice)	79
Figure 2-39:	PC-Based System Wiring Drawing (Best Practice)	79
Figure 2-40:	Drive-Based Controller System Interconnection (Best Practice)	80
Figure 2-41:	PC-Based Controller System Interconnection (Best Practice)	81
Figure 3-1:	-EB1 I/O Option Board Connectors (iXC6e shown)	83
Figure 3-2:	Digital Outputs Schematic [-EB1]	86

Figure 3-3:	Digital Outputs Connected in Current Sourcing Mode [-EB1]	87
Figure 3-4:	Digital Outputs Connected in Current Sinking Mode [-EB1]	87
Figure 3-5:	Digital Inputs Schematic [-EB1]	89
Figure 3-6:	Digital Inputs Connected to Current Sourcing (PNP) Devices [-EB1]	90
Figure 3-7:	Digital Inputs Connected to Current Sinking (NPN) Devices [-EB1]	90
Figure 3-8:	Analog Output Typical Connection [-EB1]	91
Figure 3-9:	Analog Input Typical Connection [-EB1]	92
Figure 3-10:	PSO Output Sources Current	94
Figure 3-11:	PSO Output Sinks Current	94
Figure 3-12:	PSO TTL Outputs Schematic	94
Figure 4-1:	Two Axis Joystick Interface (to the Aux I/O of two drives)	96
Figure 4-2:	Two Axis Joystick Interface (to the I/O board)	97
Figure 4-3:	Handwheel Interconnection to Aux I/O Connector	98
Figure 4-4:	Handwheel Interconnection to the Aux I/O through a BBA32 Module	98

List of Tables

Table 1-1:	Feature Summary	17
Table 1-2:	Electrical Specifications (Common)	19
Table 1-3:	Electrical Specifications (by Ordering Option)	20
Table 1-4:	Mounting Specifications	21
Table 1-5:	Environmental Specifications	24
Table 1-6:	Drive and Software Compatibility	24
Table 2-1:	Control Supply Connector Pinout	25
Table 2-2:	Control Supply Mating Connector Ratings	25
Table 2-3:	Motor Supply Connector Pinout	26
Table 2-4:	Motor Supply Mating Connector Ratings	27
Table 2-5:	Motor Supply Connector Fuse Specifications	27
Table 2-6:	Motor Power Output Connector Pinout	32
Table 2-7:	Motor Power Output Mating Connector Ratings	32
Table 2-8:	Wire Colors for Aerotech-Supplied Brushless Motor Cables	33
Table 2-9:	Hall Signal Diagnostics	34
Table 2-10:	Feedback Connector Pinout	36
Table 2-11:	Feedback Mating Connector Ratings	36
Table 2-12:	Multiplier Options	37
Table 2-13:	Primary Encoder Pins on the Feedback Connector	37
Table 2-14:	Square Wave Encoder Specifications	38
Table 2-15:	Sine Wave Encoder Specifications	40
Table 2-16:	Hall-Effect Feedback Pins on the Feedback Connector	43
Table 2-17:	Thermistor Input Pin on the Feedback Connector	44
Table 2-18:	Encoder Fault Input Pin on the Feedback Connector	45
Table 2-19:	End of Travel and Home Limit Pins on the Feedback Connector	46
Table 2-20:	Brake Output Pins on the Feedback Connector	49
Table 2-21:	Brake Control Specifications	49
Table 2-22:	STO Connector Pinout	50
Table 2-23:	STO Mating Connector Ratings	50
Table 2-24:	STO Electrical Specifications	51
Table 2-25:	STO Standards	52
Table 2-26:	STO Standards Data	52
Table 2-27:	STO Signal Delay	54
Table 2-28:	Motor Function Relative to STO Input State	54
Table 2-29:	STO Timing	55
Table 2-30:	Auxiliary I/O Connector Pinout	56
Table 2-31:	Auxiliary I/O Mating Connector Ratings	56
Table 2-32:	Auxiliary Encoder Pins on the Auxiliary I/O Connector	57
Table 2-33:	Square Wave Encoder Specifications	58
Table 2-34:	Sine Wave Encoder Specifications	60
Table 2-35:	PSO Specifications	62
Table 2-36:	PSO Pins on the Auxiliary I/O Connector	62
Table 2-37:	Digital Output Specifications	64
Table 2-38:	Digital Output Pins on the Auxiliary I/O Connector	64
Table 2-39:	Digital Input Specifications	67
Table 2-40:	Digital Input Pins on the Auxiliary I/O Connector	67
Table 2-41:	High-Speed Input Specifications	69
Table 2-42:	High-Speed Input Pins on the Auxiliary I/O Connector	69

Table 2-43:	Analog Output Specifications	70
Table 2-44:	Analog Output Pins on the Auxiliary I/O Connector	70
Table 2-45:	Analog Input Specifications	71
Table 2-46:	Analog Input Pins on the Auxiliary I/O Connector	71
Table 2-47:	Brake Power Supply Connector Pinout	72
Table 2-48:	Brake Power Supply Mating Connector Ratings	72
Table 2-49:	HyperWire Card Part Number	73
Table 2-50:	HyperWire Cable Part Numbers	73
Table 2-51:	Bus Link Connector Pinout	74
Table 2-52:	Bus Link Mating Connector Ratings	75
Table 2-53:	Internal Shunt Specifications	75
Table 2-54:	Maximum Recommended Shunt Current	75
Table 2-55:	Maximum Additional Storage Energy for a Standard iXC6e/XC6e	76
Table 2-56:	Sync-Related Functions	78
Table 2-57:	Sync Port Cables	78
Table 3-1:	Digital Output Specifications [-EB1]	84
Table 3-2:	Digital Output 1 Connector Pinout [-EB1]	85
Table 3-3:	Digital Output 2 Connector Pinout [-EB1]	85
Table 3-4:	Digital Output 1 and 2 Mating Connector Ratings [-EB1]	85
Table 3-5:	Digital Input Specifications [-EB1]	88
Table 3-6:	Digital Input 1 Connector Pinout [-EB1]	88
Table 3-7:	Digital Input 2 Connector Pinout [-EB1]	89
Table 3-8:	Digital Input 1 and 2 Mating Connector Ratings [-EB1]	89
Table 3-9:	Analog Output Specifications [-EB1]	91
Table 3-10:	Analog Output Connector Pinout [-EB1]	91
Table 3-11:	Analog Output Mating Connector Ratings [-EB1]	91
Table 3-12:	Differential Analog Input Specifications [-EB1]	92
Table 3-13:	Analog Input Connector Pinout [-EB1]	92
Table 3-14:	Analog Input Mating Connector Ratings [-EB1]	92
Table 3-15:	PSO Specifications [-EB1]	93
Table 3-16:	PSO Interface Connector Pinout [-EB1]	93
Table 3-17:	PSO Interface Mating Connector Ratings [-EB1]	93
Table 4-1:	Standard Interconnection Cables	95
Table 5-1:	LED Description	99
Table 5-2:	Troubleshooting	99
Table 5-3:	Preventative Maintenance	100
Table 5-4:	Control Board Fuse Specifications	100

EU Declaration of Conformity

Manufacturer Aerotech, Inc.
Address 101 Zeta Drive
Pittsburgh, PA 15238-2811
USA
Product iXC6e/XC6e
Model/Types All

This is to certify that the aforementioned product is in accordance with the applicable requirements of the following directive(s):

2014/30/EU	Electromagnetic Compatibility (EMC)
2014/35/EU	Low Voltage Directive
2006/42/EC	Machinery Directive
2011/65/EU	RoHS 2 Directive
EU 2015/863	Amendment RoHS 3 Directive

and has been designed to be in conformity with the applicable requirements of the following standard(s) when installed and used in accordance with the manufacturer's supplied installation instructions.


EN 61010-1:2010/AMD1:2016	Safety Requirements for Electrical Equipment
EN 61800-3:2017	EMC Requirements for Power Drives
IEC 61800-5-1:2016	Electrical Safety for Power Drive Systems
IEC 61800-5-2:2016	Functional Safety for Power Drive Systems
EN 55011/55032:2015	Conducted and Radiated Emissions

**Authorized
Representative**



/ Simon Smith, European Director
Aerotech Ltd
The Old Brick Kiln, Ramsdell, Tadley
Hampshire RG26 5PR
UK

**Engineer Verifying
Compliance**



/ Alex Weibel
Aerotech, Inc.
101 Zeta Drive
Pittsburgh, PA 15238-2811
USA
7/25/2022

Date



Safety Procedures and Warnings



IMPORTANT: This manual tells you how to carefully and correctly use and operate the drive.

- Read all parts of this manual before you install or operate the drive or before you do maintenance to your system.
- To prevent injury to you and damage to the equipment, obey the precautions in this manual.
- All specifications and illustrations are for reference only and were complete and accurate as of the release of this manual. To find the newest information about this product, refer to www.aerotech.com.

If you do not understand the information in this manual, contact Aerotech Global Technical Support.



IMPORTANT: This product has been designed for light industrial manufacturing environments. If the product is used in a manner not specified by the manufacturer:

- The protection provided by the equipment could be impaired.
- The life expectancy of the product could be decreased.

Safety notes and symbols are placed throughout this manual to warn you of the potential risks at the moment of the safety note or if you fail to obey the safety note.



The voltage can cause shock, burn, or death.



You are at risk of physical injury.
You could damage the drive.



A surface can be hot enough to burn you.



Your actions, the temperature of the system, or the condition of the atmosphere that surround the system could start a fire.



Components are sensitive to electrostatic discharge.



Unsecured cables could cause you to:

- trip and fall
- drag the product off of its mounting location
- damage the cable connections.



A blue circle symbol is an action or tip that you should obey. Some examples include:



- General tip
- Read the manual/section
- Wear protective safety equipment (eye protection, ear protection, gloves)
- If applicable, do not lift unassisted

DANGER: To decrease the risk of electrical shock, injury, death, and damage to the equipment, obey the precautions that follow.



1. Before you do maintenance to the equipment, disconnect the electrical power.
2. Restrict access to the drive when it is connected to a power source.
3. Do not connect or disconnect electrical components, wires, and cables while this product is connected to a power source.
4. Wait at least ten (10) minutes after removing the power supply before doing maintenance or an inspection. Otherwise, there is the danger of electric shock.
5. There are lethal voltages on the shunt resistor terminals.
6. Supply each operator with the necessary protection from live electrical circuits.
7. Make sure that all components are grounded correctly and that they obey the local electrical safety requirements.
8. Install the necessary precautions to supply safety and protection to the operator.



DANGER: System travel can cause crush, shear, or pinch injuries. Restrict access to all motor and stage parts while your system is connected to a power source.



DANGER: Hot surfaces. The case temperature could exceed 70°C.



DANGER: The shunt resistor dissipates a high quantity of power. To prevent the danger of electric shock or fire, you must obey the precautions that follow:

- Correctly size, mount, and protect the external shunt resistor.
- Protect the wiring to the internal shunt resistor terminals.
- Do not touch the shunt resistor terminals. There are lethal voltages on the terminals.
- Do not touch the surface of the drive or the external shunt resistor. The temperature can exceed 70°C.
- Restrict access to the shunt resistor while it is connected to a power source.
- Wait 10 minutes after you disconnect power before you access the BUS LINK connector.
- Make sure that the voltage between the DC Bus + and DC Bus - terminals is less than 50 V before you access it.



WARNING: To prevent damage to the equipment and decrease the risk of electrical shock and injury, obey the precautions that follow.

1. Make sure that all system cables are correctly attached and positioned.
2. Do not use the cables or the connectors to lift or move this product.
3. Use this product only in environments and operating conditions that are approved in this manual.
4. Only trained operators should operate this equipment.

Handling and Storage

Unpacking the drive



IMPORTANT: All electronic equipment and instrumentation is wrapped in antistatic material and packaged with desiccant. Ensure that the antistatic material is not damaged during unpacking.

Inspect the shipping container for any evidence of shipping damage. If any damage exists, notify the shipping carrier immediately.

Remove the packing list from the shipping container. Make sure that all the items specified on the packing list are contained within the package.

The documentation for the drive is on the included installation device. The documents include manuals, interconnection drawings, and other documentation pertaining to the system. Save this information for future reference. Additional information about the system is provided on the Serial and Power labels that are placed on the chassis.

The system serial number label contains important information such as the:

- Customer order number (please provide this number when requesting product support)
- Drawing number
- System part number

Handling



IMPORTANT: It is the responsibility of the customer to safely and carefully lift and move the drive.

- Be careful when you move or transport the drive.
- Refer to [Section 1.2. Mechanical Specifications](#) for dimensions and weight specifications.
- Retain the shipping materials for future use.
- Transport or store the drive in its protective packaging.



WARNING: Electrostatic Discharge (ESD) Sensitive Components!

You could damage the power supply or drives if you fail to observe the correct ESD practices.

Wear an ESD wrist strap when you handle, install, or do service to the system assembly.

Storage


Store the drive in the original shipping container. If the original packaging included ESD protective packaging, make sure to store the drive in it. The storage location must be dry, free of dust, free of vibrations, and flat.

Refer to [Section 1.3. Environmental Specifications](#).


Installation Overview

The images that follow show the order in which to make connections and settings that are typical to the iXC6e/XC6e. If a custom interconnect drawing was supplied with your system, that drawing is on your Storage Device and shows as a line item on your Sales Order in the Integration section.

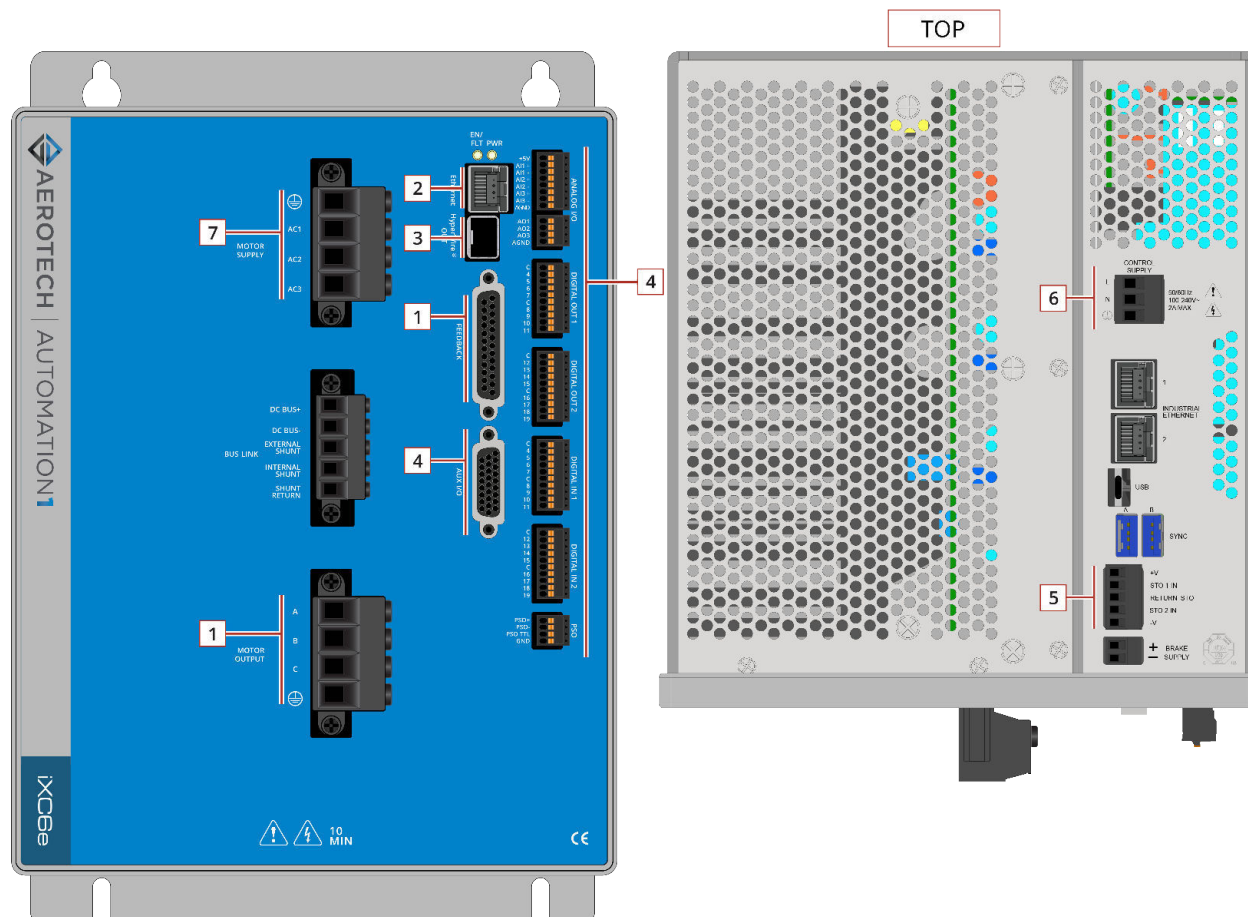Figure 1: Installation Connection Overview for the iXC6e



1	Connect the motor to the amplifier Motor Output connector.	Section 2.2.
	Connect the motor to the amplifier Feedback connector.	Section 2.3.
2	Connect the PC to the USB or Ethernet port.	N/A
3	Connect the next drive in the system to the HyperWire Out port.	Section 2.7.
4	Connect additional I/O as required by your application (if you purchased the I/O option).	Section 2.5./ Chapter 3
5	Connect the Safe Torque Off (STO).	Section 2.4.
6	Connect the power supply to the Control Supply connector.	Section 2.1.1.
7	Connect the motor power to the Motor Supply connector.	Section 2.1.2.

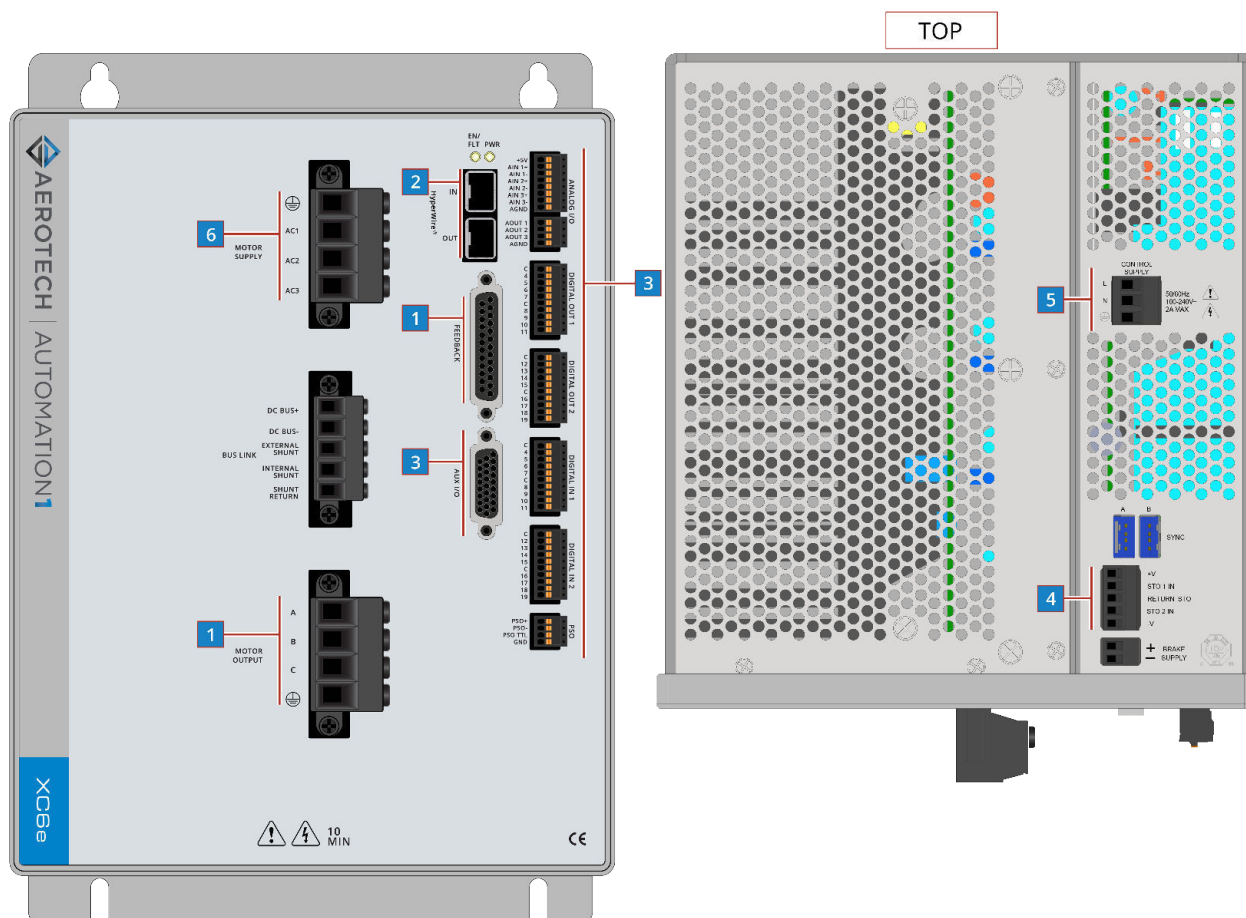Figure 2: Installation Connection Overview for the XC6e

1	Connect the motor to the amplifier Motor Output connector.	Section 2.2.
2	Connect the motor to the amplifier Feedback connector.	Section 2.3.
3	Connect a PC or drive-based controller HyperWire port to the HyperWire In port.	Section 2.7.
3	Connect additional I/O as required by your application (if you purchased the I/O option).	Section 2.5./ Chapter 3
4	Connect the Safe Torque Off (STO).	Section 2.4.
5	Connect the power supply to the Control Supply connector.	Section 2.1.1.
6	Connect the motor power to the Motor Supply connector.	Section 2.1.2.

Chapter 1: iXC6e/XC6e Overview

The iXC6e is a high-performance digital drive-based controller. It runs the Automation1-iSMC controller to generate commands for itself as well as for additional drives on the chain.

The XC6e is a high performance digital drive. The XC6e is based on the HyperWire communication protocol and receives commands from a PC or drive-based controller.

Both drives provide deterministic behavior, auto-identification, and are fully software configurable. A double precision floating point DSP controls the digital PID and current loops. Both drives offer standard Safe Torque Off (STO) inputs and optional Position Synchronized Output (PSO) outputs. And both drives are offered with optional encoder interpolation features (-MX2/-MX3), an auxiliary encoder input for dual loop control, dedicated analog and digital I/O (expandable with the -EB1 option), and separate power connections for motor and control supply voltages.

Figure 1-1: iXC6e High Power Networked Digital Drive

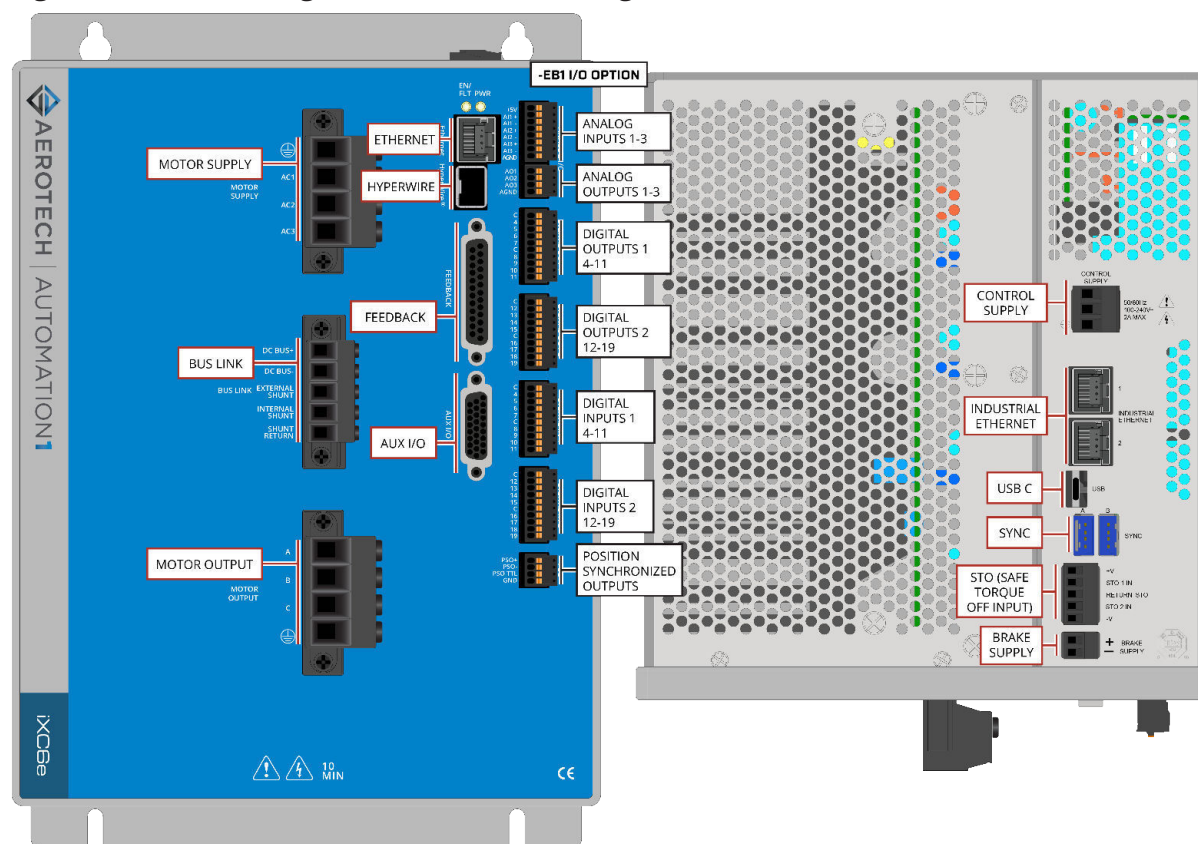


Figure 1-2: XC6e High Power Networked Digital Drive


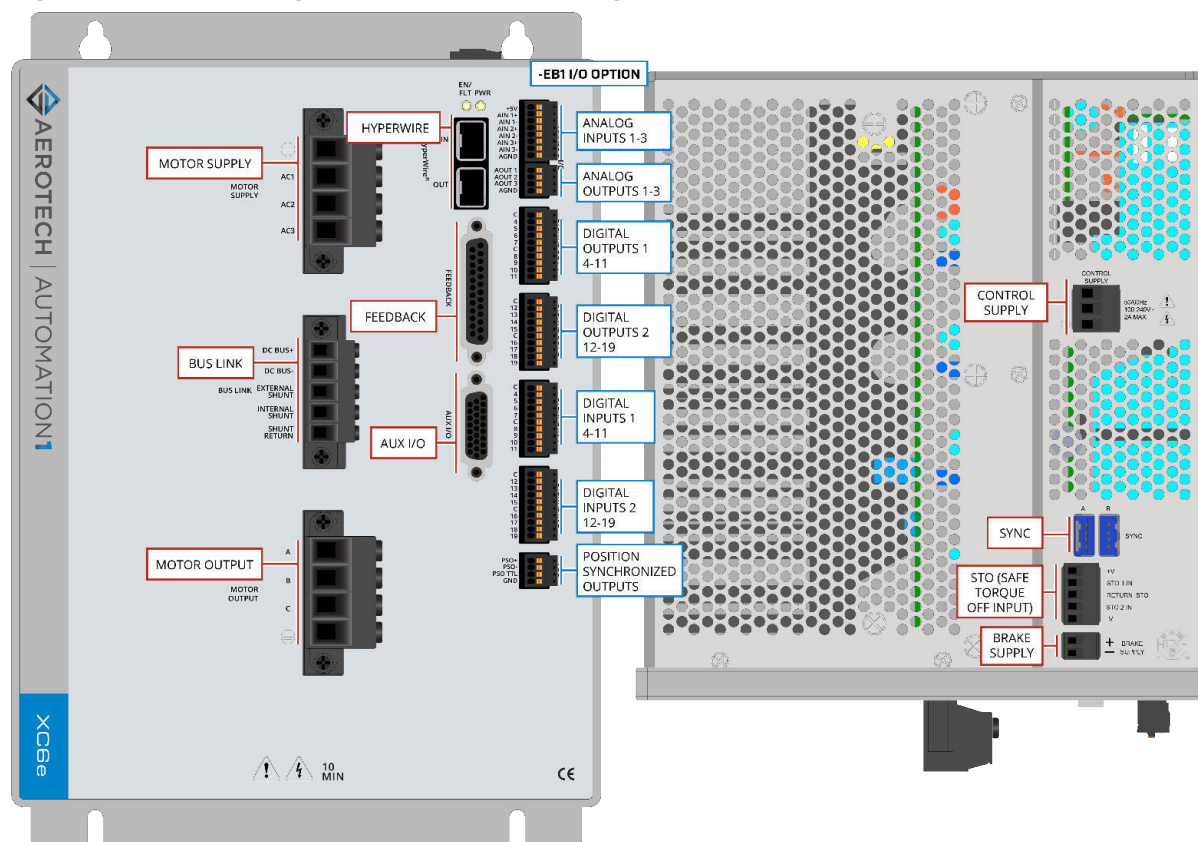


Table 1-1: Feature Summary

Standard Features	
<ul style="list-style-type: none"> • 100-240 VAC control supply inputs (Section 2.1.1.) • Line driver square wave quadrature encoder input for position and velocity feedback (Section 2.3.1.) • Absolute Encoder support on the Feedback Connector (Section 2.3.1.2.) • One fail-safe brake output (Section 2.3.6.) • Two STO sense inputs (Section 2.4.) • Line driver square wave auxiliary quadrature encoder input or output for PSO (Section 2.5.1.) • Absolute Encoder support on the Auxiliary I/O Connector (Section 2.5.1.2.) • Four digital user outputs (Section 2.5.3.) • Six digital user inputs <ul style="list-style-type: none"> ◦ Four Digital Inputs (Section 2.5.4.) ◦ Two High-Speed Inputs (Section 2.5.5.) • One 16-bit analog output (± 10 V) (Section 2.5.6.) • One 16-bit differential analog input (± 10 V) (Section 2.5.7.) • Connections to configure an internal shunt resistor (Section 2.8.) • One 10/100/1000 BASE-T Ethernet Port (iXC6e Only) • One USB 2.0 Type C Port (iXC6e Only) • Two 10/100/1000 BASE-T Industrial Ethernet Ports (iXC6e Only) 	
Options	
Peak Current (Section 1.1.)	
-10	10 A Peak, 5 A Continuous Current
-20	20 A Peak, 10 A Continuous Current
-30	30 A Peak, 10 A Continuous Current
-50	50 A Peak, 25 A Continuous Current
-100	100 A Peak, 30/50 A Continuous Current
Rated Motor Supply Voltage (Section 2.1.2.)	
-240	240 VAC Maximum (phase to phase)
-480	480 VAC Maximum (phase to phase)
Expansion Board (Chapter 3)	
-EB0	No expansion board
-EB1	I/O expansion board <ul style="list-style-type: none"> • Three 16-bit analog outputs (± 10 V) • Three 16-bit differential analog inputs (± 10 V) • 16 digital logic inputs (5 - 24 VDC), can be connected to current sourcing or sinking devices • 16 digital logic outputs (5 - 24 VDC), user defined as current sourcing or sinking • Digital logic laser firing (PSO) output
Multiplier (Section 2.3.1.3.)	
-MX0	No encoder multiplier
-MX2	Interpolation circuit allowing for analog sine wave input on the primary encoder channel with an interpolation factor of 65,536.
-MX3	Interpolation circuit allowing for analog sine wave input on the primary encoder channel with an interpolation factor of 65,536 and an auxiliary encoder channel with an interpolation factor of 16,384.
PSO (Section 2.5.2.)	
-PSO1	One-axis PSO firing (includes One-axis Part-Speed PSO)
-PSO2	Two-axis PSO firing (includes Two-axis Part-Speed PSO)
-PSO3	Three-axis PSO firing (includes Three-axis Part-Speed PSO)
-PSO5	Two-axis Part-Speed PSO firing, which uses the PSO firing circuit based off of the commanded vector velocity of up to 2 axes (includes One-Axis PSO).
-PSO6	Three-axis Part-Speed PSO firing, which uses the PSO firing circuit based off of the commanded vector velocity of 3 or more axes (includes One-Axis PSO).
Version	
-DEFAULT	Firmware Matches Software Line
-LEGACY	Legacy Firmware Version X.XX.XXX

The block diagram that follows shows a summary of the connector signals.

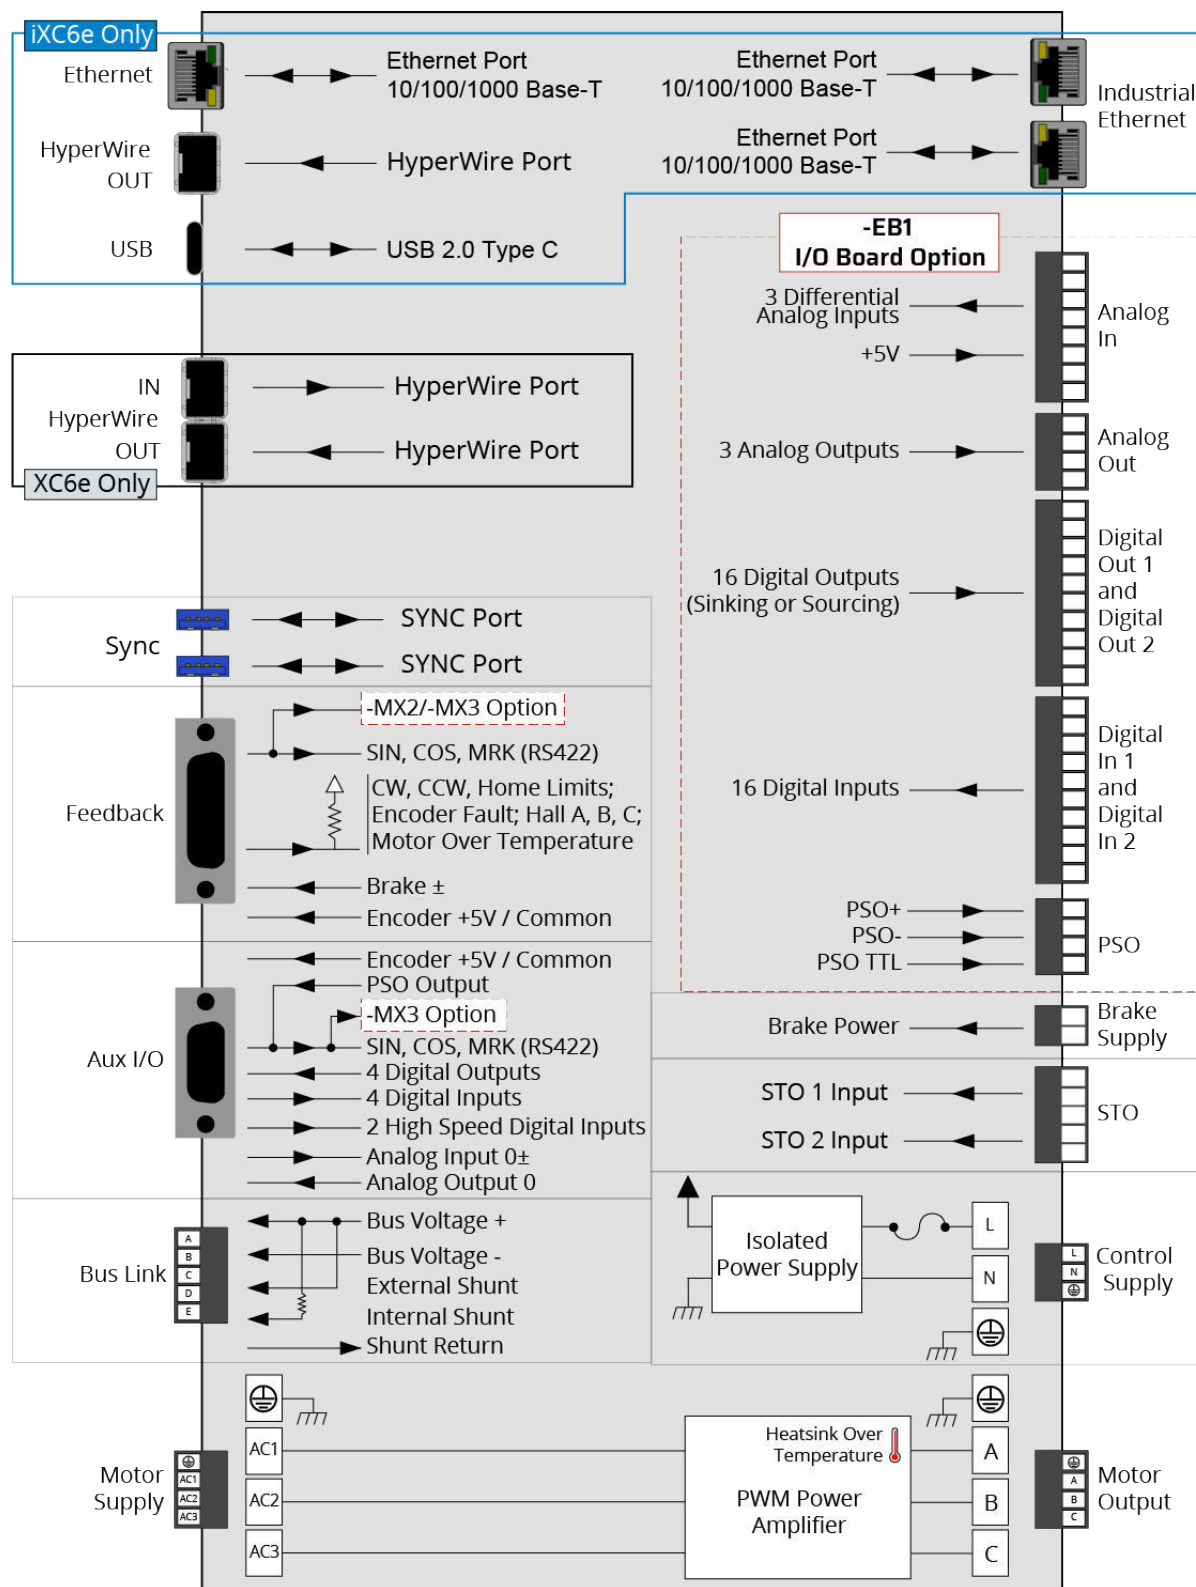Figure 1-3: Functional Diagram



1.1. Electrical Specifications

Table 1-2: Electrical Specifications (Common)

Description		Specification
Control Supply	Input Voltage	100-240 VAC ($\pm 10\%$)
	Input Frequency	50-60 Hz
	Inrush Current	120 A _{pk} @ 240 V
	Input Power	60 W
	Internal Fuse	2 A/250 V, 35 A interrupt rating, L terminal only
Motor Supply SCCR		5 kA
Power Amplifier Bandwidth		2500 Hz maximum (software selectable)
PWM Switching Frequency		20 kHz or 10 kHz (software selectable)
Minimum Load Inductance		0.5 mH
User Power Supply Output		5 VDC (@ 500 mA)
Motor Output Current Frequency		0-599 Hz
Motor Type		Brushless
Protective Features		<ul style="list-style-type: none"> • Output short circuit • Peak over current • DC bus over voltage • Motor RMS over current • Motor over temperature • Heatsink over temperature • Control power supply under voltage • IGBT supply under voltage • Shunt resistor monitoring
Insulation		Protective Class 1: Basic insulation plus protective earthing, OV Cat 2, Reinforced insulation between high and low voltage circuits
Conductors		Copper, 75°C min

Table 1-3: Electrical Specifications (by Ordering Option)

Input Voltage Option	-240		-480				
Output Current Option	-50	-100	-10	-20	-30	-50	-100
Motor Supply Input Current (at full output power)	15 A	30 A	3 A	6 A	10 A	15 A	20 A
Motor Supply Input Voltage Max (TN Configuration Only) ⁽¹⁾ (Vrms phase to phase, +10%)	240 VAC 50/60 Hz		480 VAC (center earthed 277 VAC L-N) ⁽⁴⁾ 50/60 Hz				
Motor Supply Input Power (at full output power)	6.7 kW	13 kW	2.7 kW	5.4 kW	8 kW	13 kW	16 kW ⁽²⁾ / 27 kW ⁽³⁾
Output Current (pk ⁽⁵⁾)	50 A	100 A	10 A	20 A	30 A	50 A	100 A ⁽²⁾
Output Current continuous (pk ⁽⁵⁾)	25 A	50 A	5 A	10 A	15 A	25 A	30/50 A ⁽³⁾
Output Voltage Vrms max	260 VAC		356 VAC				
Electronic Overcurrent Shutoff	100 A	200 A	100 A	100 A	100 A	200 A	200 A
Shunt / Brake Electronic Overcurrent Shutoff	50 A	100 A	50 A	50 A	50 A	100 A	100 A
Maximum overload protection (external fuse or breaker)	30 A		20 A				
Internal Motor Supply Capacitance	4800 µF		1500 µF				
DC Bus + or DC Bus – terminal voltage measured to earth ground	260 VAC		356 VAC				
DC Bus + to DC Bus – Voltage, terminal to terminal (max)	400 VDC		880 VDC				
Capacitor Safe Discharge Time	10 minutes (verify <50 VDC at DC bus terminals)						
(1) A lower motor supply voltage can be used. This will result in a reduction of output power.							
(2) Specification for 20kHz PWM switching frequency .							
(3) Specification for 10kHz PWM switching frequency .							
(4) The XC6-480 drive must be connected only to a grounded wye-source where the maximum voltage does not exceed 277 VAC to ground.							
(5) Motor output current is specified as a peak value (not RMS) and corresponds to the maximum phase current during a locked rotor condition.							

1.1.1. System Power Requirements

The following equations can be used to determine total system power requirements. The actual power required from the mains supply will be the combination of actual motor power (work), motor resistance losses, and efficiency losses in the power electronics or power transformer.

Use an EfficiencyFactor of approximately 90% in the following equations.

Brushless Motor

$$\begin{aligned}
 \text{Power Output} &= \text{Torque} \cdot \text{Angular Velocity} && ; \text{ Rotary} \\
 &= \text{Force} \cdot \text{Linear Velocity} && ; \text{ Linear} \\
 &= B_{\text{emf}} \cdot I_{\text{rms}} \cdot 3 && ; \text{ Rotary or Linear} \\
 \text{Power Loss} &= 3 \cdot I_{\text{rms}}^2 \cdot R(\text{line-line}) / 2 \\
 \text{Power Input} &= (\text{Power Output} + \text{Power Loss}) / \text{EfficiencyFactor}
 \end{aligned}$$

DC Brush Motor

$$\begin{aligned}
 \text{Power Output} &= \text{Torque} \cdot \text{Angular Velocity} \\
 \text{Power Loss} &= I_{\text{rms}}^2 \cdot R \\
 \text{Power Input} &= (\text{Power Output} + \text{Power Loss}) / \text{EfficiencyFactor}
 \end{aligned}$$

1.2. Mechanical Specifications

1.2.1. Mounting and Cooling

The drive must be installed in an enclosed control cabinet suitable for installation of power equipment. A minimum enclosure rating of IP54 is required to comply with safety standards. Make sure that there is sufficient clearance surrounding the drive for free airflow and for the routing of cables and connections. Consideration for items such as line reactors, line filters, and motor chokes or inductance should be made during the initial cabinet design phase.

Table 1-4: Mounting Specifications


		iXC6e/XC6e
Customer-Supplied Enclosure		IP54 Compliant
Weight		7 kg
Mounting Hardware		M4 [#8] screws (four locations, not included)
Mounting Orientation		Vertical (typical)
Dimensions		Refer to Section 1.2.2. Dimensions
Minimum Clearance	Airflow	~25 mm
	Connectors	~100 mm
Operating Temperature		Refer to Section 1.3. Environmental Specifications
Drive IP Rating		IP20

1.2.2. Dimensions



IMPORTANT: iXC6e and XC6e dimensions are the same. iXC6e is shown.

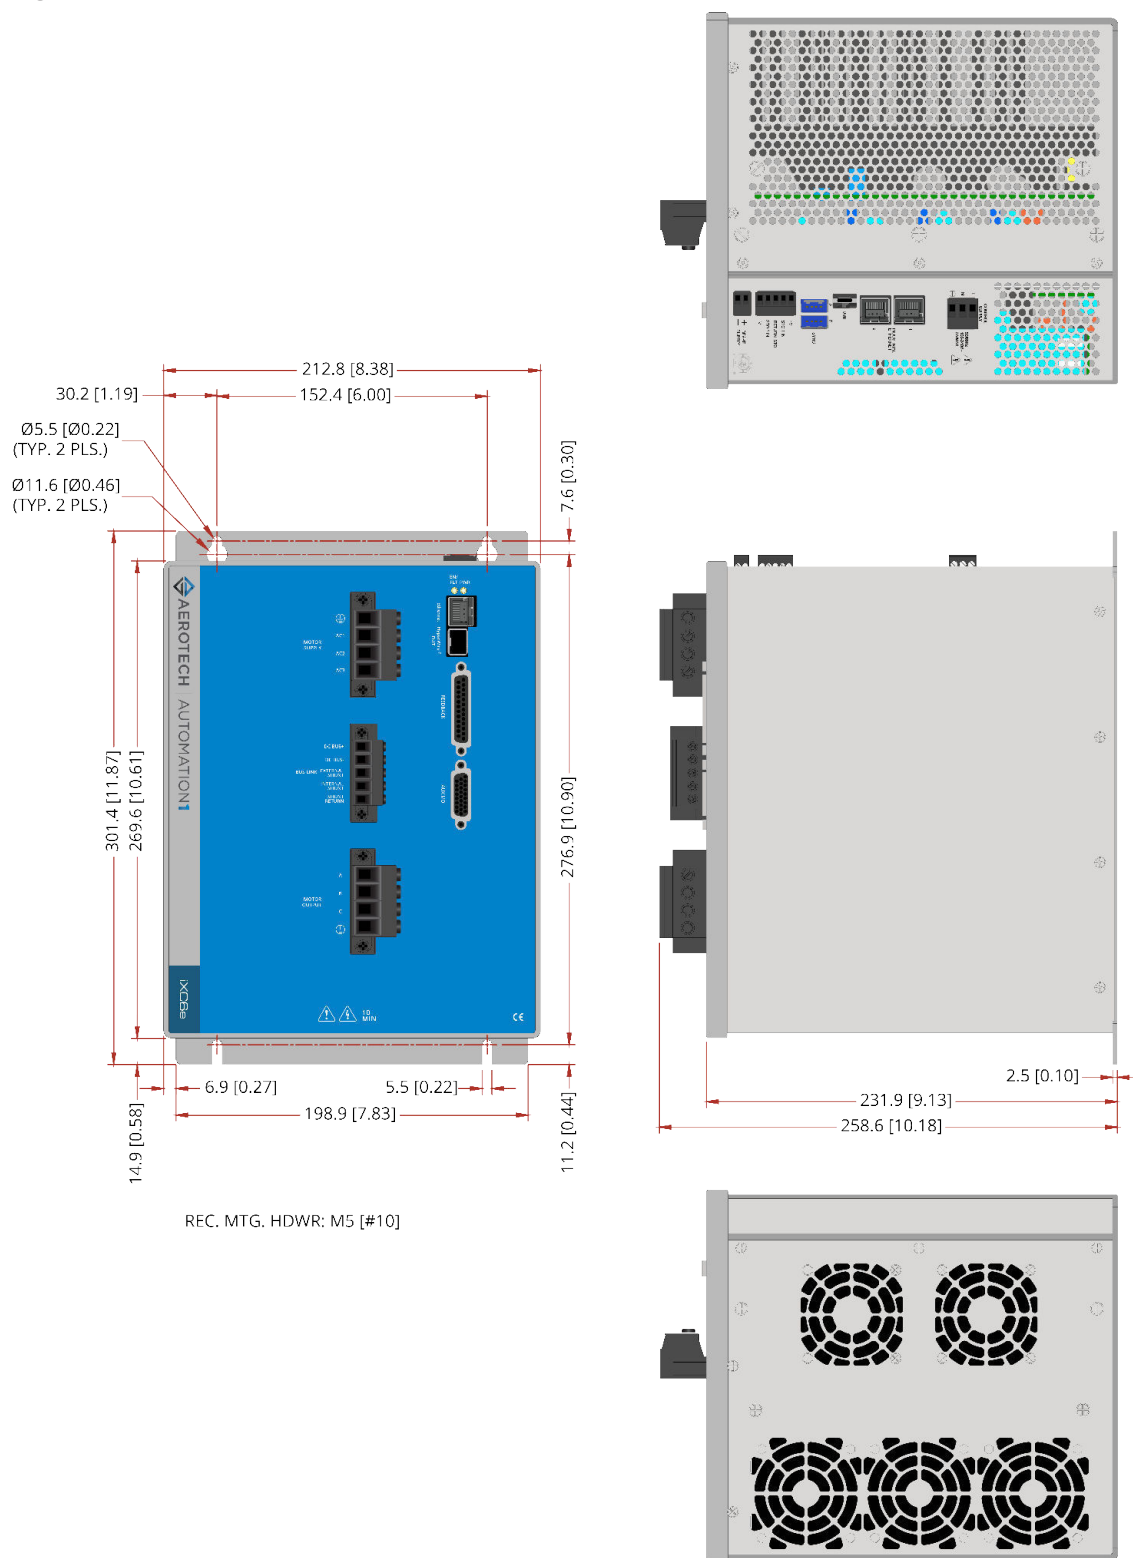
Figure 1-4: Dimensions





IMPORTANT: iXC6e-EB1 and XC6e-EB1 dimensions are the same. iXC6e-EB1 is shown.

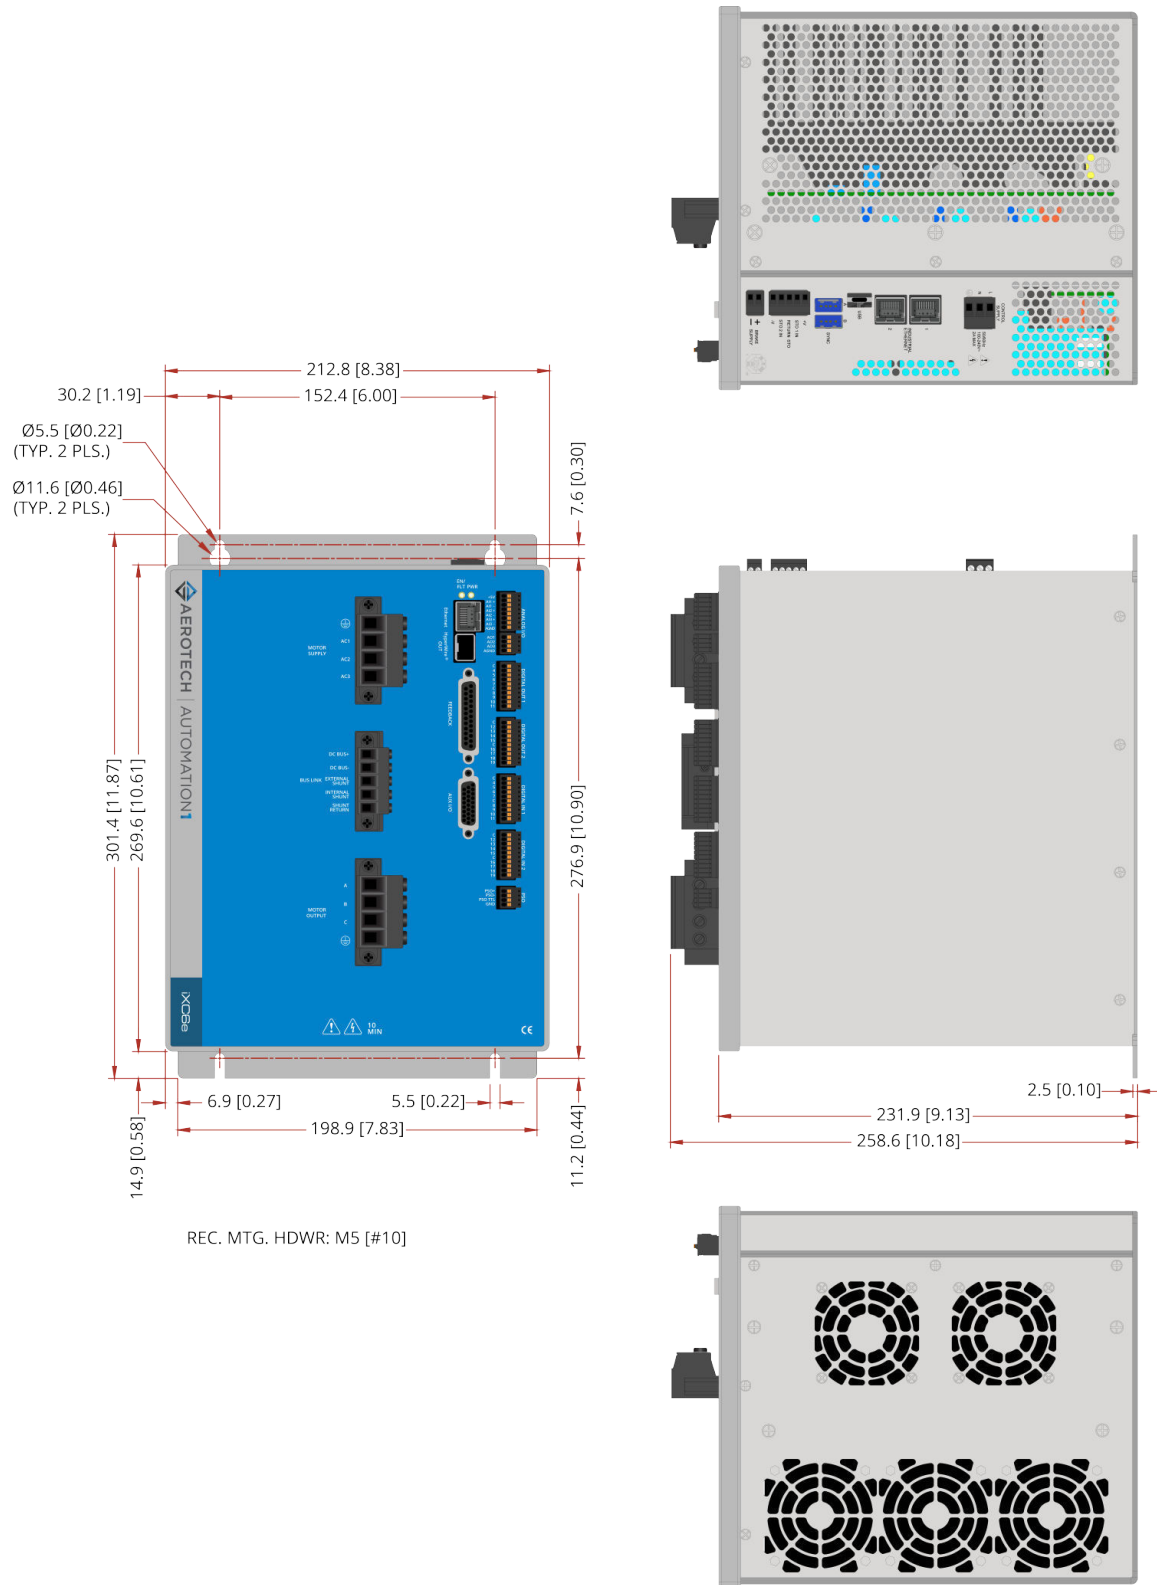Figure 1-5: Dimensions [-EB1]



1.3. Environmental Specifications

The environmental specifications are listed below.

Table 1-5: Environmental Specifications

Ambient Temperature	Operating: 0° to 40°C (32° to 104° F)
	Storage: -30° to 85°C (-22° to 185° F)
Humidity Non-condensing	The maximum relative humidity is 80% for temperatures that are less than 31°C and decreases linearly to 50% relative humidity at 40°C.
Operating Altitude	0 m to 2,000 m (0 ft to 6,562 ft) above sea level.
	If you must operate this product above 2,000 m or below sea level, contact Aerotech, Inc.
Pollution	Pollution Degree 2 Typically only nonconductive pollution occurs.
Operation	Use only indoors

1.4. Drive and Software Compatibility

This table shows the available drives and which version of the software first supported each drive. In the **Last Software Version** column, drives that show a specific version number are not supported after that version.

Table 1-6: Drive and Software Compatibility

Drive Type	First Software Version	Last Software Version
iXC6e	2.1.0	Current
XC6e	2.0.0	Current

Chapter 2: Installation and Configuration

The sections in this chapter include details on how to set up the electrical and safety components of your system. Obey all safety warnings, including those in [Safety Procedures and Warnings](#).

2.1. Input Power Connections

The drive has two AC input power connectors. One connector is for control power and the other connector is for motor power. For a full list of electrical specifications, refer to [Section 1.1](#).

2.1.1. Control Supply Connector



DANGER: Shock and Fire Hazard

Electrical wiring must be designed and installed in accordance with local electrical safety regulations to prevent the risk of fire and electrical shock.

The Control Supply input supplies power to the communications and logic circuitry of the drive. The **L** input is connected to an internal fuse. Refer to [Table 5-4](#) for the internal fuse value and part number. The **N** input is not connected to an internal fuse. An external fuse will be required if **N** is not connected to Neutral.

The Control Supply contains an internal filter but you could be required to add an external filter for CE compliance. Install the external filter module as close as possible to the drive. Use a Schaffner FN2010-6-06, Corcom 10VW1, or similar filter.

Figure 2-1: Control Supply Connections

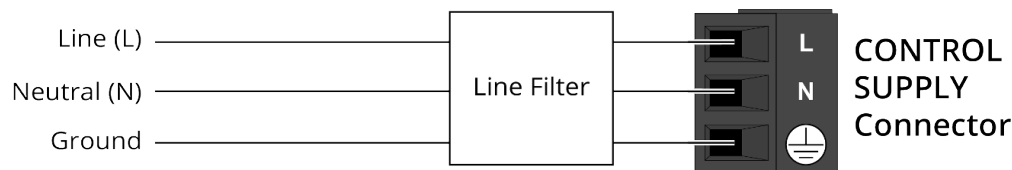



Table 2-1: Control Supply Connector Pinout

Pin	Description
L	Line (L): 100-240 VAC Control Power Input
N	Neutral (N) or 100-240 VAC Control Power Input with external fuse
	Protective Ground

Table 2-2: Control Supply Mating Connector Ratings

Specification		Description
Type		3-Pin Terminal Block
Part Numbers		Aerotech: ECK02388
		Phoenix: 1756272
Conductor Cross Section	One conductor, stranded with ferrule and plastic sleeve	14...22 AWG (0.25...2.5 mm ²)
	Two conductors (same cross-section), stranded, twin ferrule with plastic sleeve	16...20 AWG (0.5...1.5 mm ²)
Tightening Torque		0.5...0.6 N·m
Conductor Insulation Strip Length		7 mm (0.25 in)
(1) Refer to the manufacturer website for additional information.		

2.1.2. Motor Supply Connector




DANGER: Shock and Fire Hazard

Electrical wiring must be designed and installed in accordance with local electrical safety regulations to prevent the risk of fire and electrical shock.


Motor power is applied to the **AC1**, **AC2**, and **AC3** terminals of the Motor Supply connector. Three phase power is required and must be in a center grounded TT/TN configuration. For CE compliance, connect an AC line filter as close as possible to the drive (refer to [Section 2.1.3.](#)).

The system designer must provide branch protection (fuses or circuit breakers) for the drive. Add branch protection or D-type breakers in accordance with local electrical safety requirements.

A line reactor can be used to reduce inrush currents, reduce conducted harmonics, improve power factor and protect the drive against voltage surges. Refer to [Section 2.1.4.](#) for more information on reducing inrush currents.



CAUTION: The drive can cause a DC current in the protective earthing conductor. Where a residual current-operated protective (RCD) or monitoring (RCM) device is used for protection in case of direct or indirect contact, only an RCD or RCM of Type B is allowed on the supply side of the drive.



WARNING: Verify that all ground connections are installed correctly before you apply power to the iXC6e/XC6e.

Figure 2-2: Motor Supply Connections

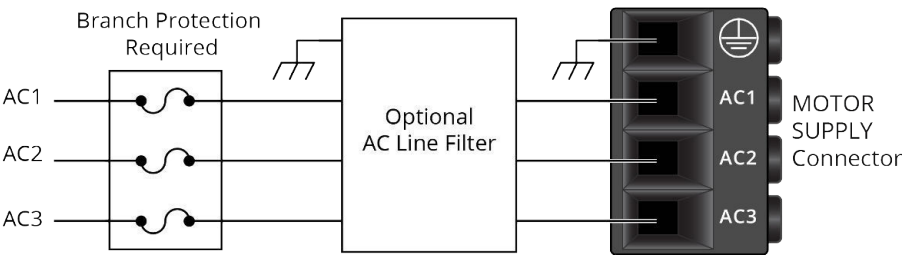


Table 2-3: Motor Supply Connector Pinout


Pin	Function
AC1	AC Motor Power Input
AC2	AC Motor Power Input
AC3	AC Motor Power Input
	Protective Earthing Conductor: 2.5 mm ² (14 AWG) minimum conductor size

Table 2-4: Motor Supply Mating Connector Ratings

Specification		Description
Type		4-Pin Terminal Block
Part Numbers		Aerotech: ECK02495
		Phoenix: 1710352
Conductor Cross Section	One conductor, stranded with ferrule and plastic sleeve	8...14 AWG (2.5...10 mm ²)
	Two conductors (same cross-section), stranded, twin ferrule with plastic sleeve	10...14 AWG (2.5...6 mm ²)
Tightening Torque		1.7...1.8 N·m
Conductor Insulation Strip Length		12 mm (0.5 in)
(1) Refer to the manufacturer website for additional information.		

Table 2-5: Motor Supply Connector Fuse Specifications

Drive Voltage	Maximum Fuse or Breaker Value	Fuse or Breaker Types
-240	30 A	<ul style="list-style-type: none"> • Littelfuse Class RK5 (UL) • gG/gL Class (IEC 60269) • Type "D" Circuit Breakers (Eaton FAZ-D)
-480	20 A	

2.1.3. Minimizing Noise for EMC/CE Compliance



IMPORTANT: The iXC6e/XC6e is a component designed to be integrated with other electronics. EMC testing must be conducted on the final product configuration.

To reduce electrical noise, observe the following motor feedback and input power wiring techniques.

1. Use shielded cable for motor and feedback connectors. Connect the shield to the backshell at each end of the cable.
2. Separate motor and power wiring from encoder and I/O wiring.
3. Mount drives, power supplies, and filter components on a conductive panel. Mount line filters close to the drive to keep the wire length between the drive and filter to a minimum. Use an AC line filter on the Control Supply such as Schaffner FN2010-6-06 or Corcom 10VW1 or similar. Use an AC line filter on the Motor Supply such as a Schaffner FN258-55-34.
4. Use a separate wire for each ground connection to the drive. Use the shortest possible wire length.

The following additional changes could be required for EMC compliance and are recommended during initial EMC system evaluation.

1. Add a clamp-on ferrite to the feedback cable close to the drive.
[Aerotech PN ECZ02348, Fair-rite PN 0446167281]
2. Add a clamp-on ferrite to the Control Supply wires, including the ground wire, close to the drive.
[Aerotech PN ECZ02347, Fair-rite PN 0446164281]


2.1.4. Inrush Current Limiting

A large current can occur on the motor supply lines when power is first applied to the drive. This current is due to charging of the internal motor supply capacitance and can cause the circuit breakers to open unexpectedly.

Inrush limiting devices, such as Negative Temperature Coefficient (NTC) devices, can be installed externally to the drive to reduce this current. NTC devices can be inserted into each motor AC supply line. Ideally these devices are bypassed using a contactor shortly after power has been applied and the capacitors are fully charged. This helps to keep the NTC device cool so that it is effective on future power up events and also provides maximum stiffness of the motor supply voltage. Alternately, high surge power resistors can be used to further reduce the inrush current levels.

The figure that follows shows a typical configuration of an inrush limiting circuit implemented external to the drive.

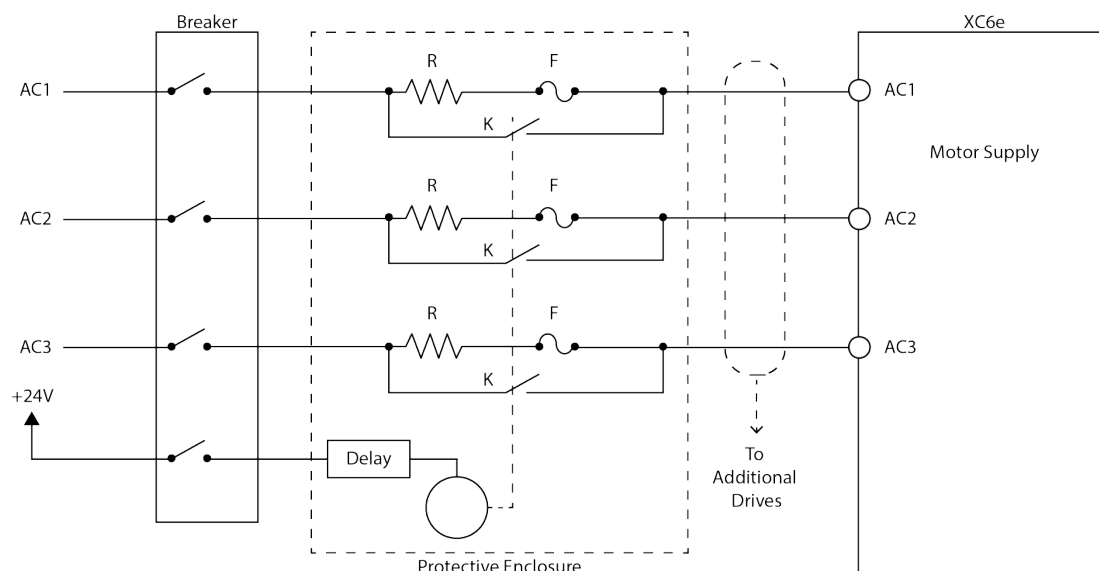Figure 2-3: Inrush Limiting Circuit External to Drive



Inrush Limiting Device (R)

The inrush current is given by the equation that follows, assuming that 3 limiters are used, one per phase.

$$I_{in} = V_{in} \cdot (\sqrt{2}/\sqrt{3}) / R$$

Where:

- I_{in} = peak inrush current A
- V_{in} = line-line input voltage (RMS)
- R = resistance of the limiting device in Ohms

If only two limiters are used, the inrush current increases by a factor of 3x in the worst case. See the examples that follow for calculating the inrush current while using different limiting devices.

Example 1

Ametherm: MM35 1R550-DIN (1.5 Ohm, 1200J, 50A - NTC device) with 208VAC Motor Supply input voltage

Based on the energy rating on this device, it can support up to twelve XC6e-240 drives and up to nine XC6e-480V drives.

$$\begin{aligned} I_{pk} &= 208 \cdot 0.816 / 1.5 \\ &= 113 \text{ A} \end{aligned}$$

Example 2

Vishay: €RBEF02208R000KFBVT (8 Ohm 220W resistor) with 480VAC Motor Supply input voltage

The RBEF type resistor is a high surge resistor type that can be used to further reduce inrush currents. Installing the resistors in a separate protective enclosure is recommended to reduce the risk of fire and electric shock. You should also consider adding fuses in series with the resistor and monitoring the bypass relay contactor for failure.

$$\begin{aligned} I_{pk} &= 480 \cdot 0.816 / 8 \\ &= 49 \text{ A} \end{aligned}$$

Contactor K/M

A bypass contactor is required when using resistors, and it is recommended when using NTC limiters. The required time delay can be calculated using the formula that follows with a T_c (time constant) factor between 5 and 10.

$$T_d = T_c \cdot R_{eq} \cdot C_{eq} \cdot N$$

Where:

T_d = Time delay required in seconds

T_c = Time constant factor (5-10)

R_{eq} = Inrush limiter resistance

C_{eq} = Internal capacitance of each drive (refer to [Table 1-3](#))

N = Number of drives

See the examples that follow that show how to correctly calculate the T_d (time delay).

Calculate the contactor delay time for four XC6e-480 drives using three 8 Ω inrush limiters.

$$\begin{aligned} T_{d(\min)} &= 5 \cdot 8 \cdot 1500 \cdot 10^{-6} \cdot 4 & ; T_c &= 5 \\ &= 0.24 \text{ s} \\ T_{d(\max)} &= 10 \cdot 8 \cdot 1500 \cdot 10^{-6} \cdot 4 & ; T_c &= 10 \\ &= 0.48 \text{ s} \end{aligned}$$

Calculate the contactor delay time required for six XC6e-240 drives using three 1.5 Ω inrush limiters.

$$\begin{aligned} T_{d(\min)} &= 5 \cdot 15 \cdot 4800 \cdot 10^{-6} \cdot 6 & ; T_c &= 5 \\ &= 0.22 \text{ s} \\ T_{d(\max)} &= 10 \cdot 15 \cdot 4800 \cdot 10^{-6} \cdot 6 & ; T_c &= 10 \\ &= 0.44 \text{ s} \end{aligned}$$

The list that follows includes suggestions for inrush limiter bypass contactors. You can also use devices that are not on the list, but they must be rated for the system voltage / current and must be in accordance with local electrical safety requirements.

Manufacturer P/N	Description
CA7-40-E-M40-24E	4 Pole, 37A, 24VDC coil
CA7-60D-00-24DD	3 Pole, 60A, 24VDC coil
CA7-72D-00-24DD	3 Pole, 60A, 24VDC coil
CA7-85D-00-24DD	3 Pole, 60A, 24VDC coil
CA7-97D-00-24DD	3 Pole, 60A, 24VDC coil

The list that follows includes time delay accessories for the CA7 series contactors. The contactor may also be controlled by software or other logic that monitors the motor supply levels and provides the desired delay.

Manufacturer P/N	Description
CRE7-3-24/48VDC	0.1 to 3 second adjustable turn on delay
CRE7-30-24/48VDC	1 to 30 second adjustable turn on delay

2.2. Motor Power Output Connector

The drive can be used to control brushless motors (refer to [Section 2.2.1.](#)).

For a complete list of electrical specifications, refer to [Section 1.1.](#)



DANGER: Shock and Fire Hazard

Electrical wiring must be designed and installed in accordance with local electrical safety regulations to prevent the risk of fire and electrical shock.

The 4-pin terminal block style motor output connector is located on the front panel.

Table 2-6: Motor Power Output Connector Pinout

Pin	Description	Connector
A	Motor Phase A Output	
B	Motor Phase B Output	
C	Motor Phase C Output	
	Motor Ground	

Table 2-7: Motor Power Output Mating Connector Ratings

Specification		Description
Type		4-Pin Terminal Block
Part Numbers		Aerotech: ECK02495
		Phoenix: 1710352
Conductor Cross Section	One conductor, stranded with ferrule and plastic sleeve	8...14 AWG (2.5...10 mm ²)
	Two conductors (same cross-section), stranded, twin ferrule with plastic sleeve	10...14 AWG (2.5...6 mm ²)
Tightening Torque		1.7...1.8 N·m
Conductor Insulation Strip Length		12 mm (0.5 in)
(1) Refer to the manufacturer website for additional information.		

2.2.1. Brushless Motor Connections

The configuration in [Figure 2-4](#) shows a typical brushless motor connection.

For optimum performance:

- Aerotech recommends that you use shield cables designed for VFD applications.
- Series inductance could be required when you use long cables (> 20 m) to prevent high voltage ringing.
 - This should be added to each motor phase close to the drive.
 - Application dependent.
- The cable voltage and current rating must be sized according to the application requirements and local electrical safety regulations.
- The drive parameters `AverageCurrentThreshold` and `AverageCurrentTime` must be set to protect the motor from overheating.

Figure 2-4: Brushless Motor Configuration

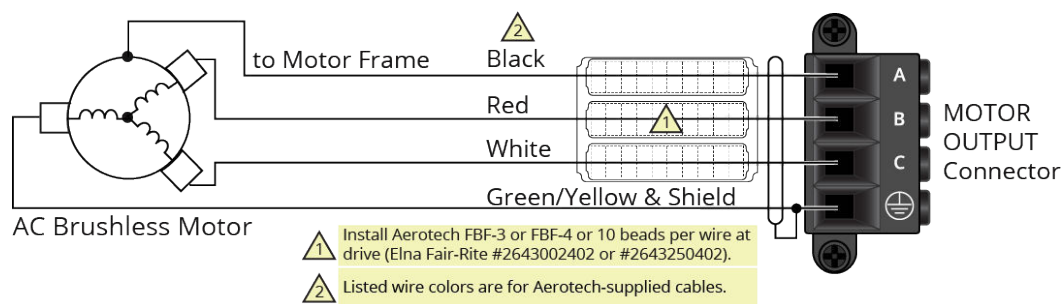


Table 2-8: Wire Colors for Aerotech-Supplied Brushless Motor Cables

Pin	Wire Color Set 1 ⁽¹⁾	Wire Color Set 2	Wire Color Set 3	Wire Color Set 4
	Green/Yellow & Shield ⁽²⁾	Green/Yellow & Shield	Green/Yellow & Shield	Green/Yellow & Shield
A	Black	Blue & Yellow	Black #1	Black & Brown
B	Red	Red & Orange	Black #2	Red & Orange
C	White	White & Brown	Black #3	Violet & Blue

(1) Wire Color Set #1 is the wire set typically used by Aerotech.
 (2) "&" indicates two wires (Red & Orange); "/" indicates a single wire (Green/White).

Brushless motors are commutated electronically by the controller. The use of Hall effect devices for commutation is recommended.

The controller requires that the Back-EMF of each motor phase be aligned with the corresponding Hall-effect signal. To ensure proper alignment, motor, Hall, and encoder connections should be verified using one of the following methods: *powered*, through the use of a test program; or *unpowered* using an oscilloscope. Both methods will identify the A, B, and C Hall/motor lead sets and indicate the correct connections to the controller. Refer to [Section 2.2.1.1](#) for powered motor phasing or [Section 2.2.1.2](#) for unpowered motor and feedback phasing.

For Aerotech-supplied systems, the motor, encoder and Hall sensors are correctly configured and connection adjustments are not necessary.

2.2.1.1. Brushless Motor Powered Motor and Feedback Phasing

Observe the state of the encoder and Hall-effect device signals in the Diagnostics section of the Status Utility.

Table 2-9: Hall Signal Diagnostics

Hall-Signal Status	Definition
--	0 V or logic low
ON	5 V or logic high

Figure 2-5: Positive Motor Direction


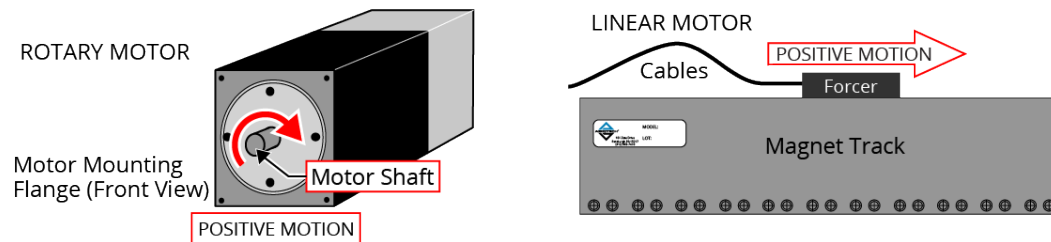



Figure 2-6: Encoder and Hall Signal Diagnostics

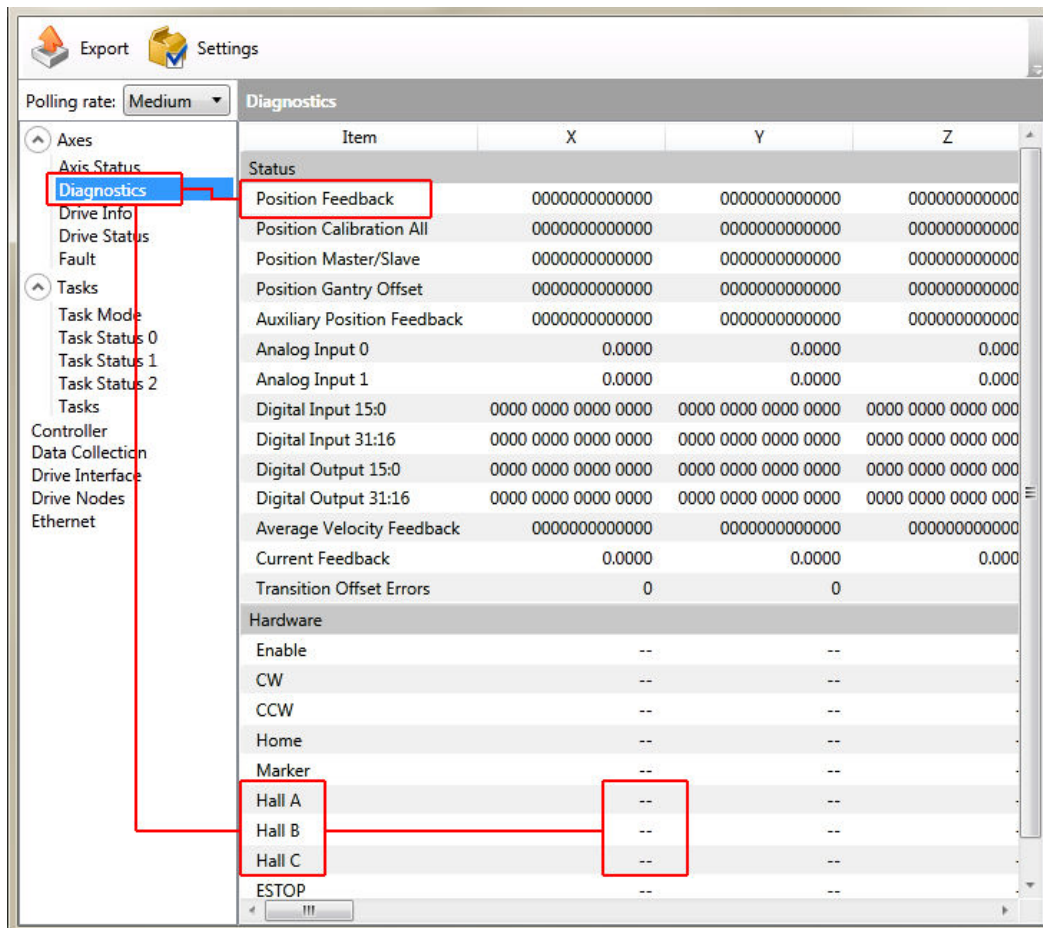

2.2.1.2. Brushless Motor Unpowered Motor and Feedback Phasing


Disconnect the motor from the controller and connect the motor in the test configuration shown in [Figure 2-7](#). This method will require a two-channel oscilloscope, a 5V power supply, and six resistors (10,000 ohm, 1/4 watt). All measurements should be made with the probe common of each channel of the oscilloscope connected to a neutral reference test point (TP4, shown in [Figure 2-7](#)). Wave forms are shown while moving the motor in the positive direction.

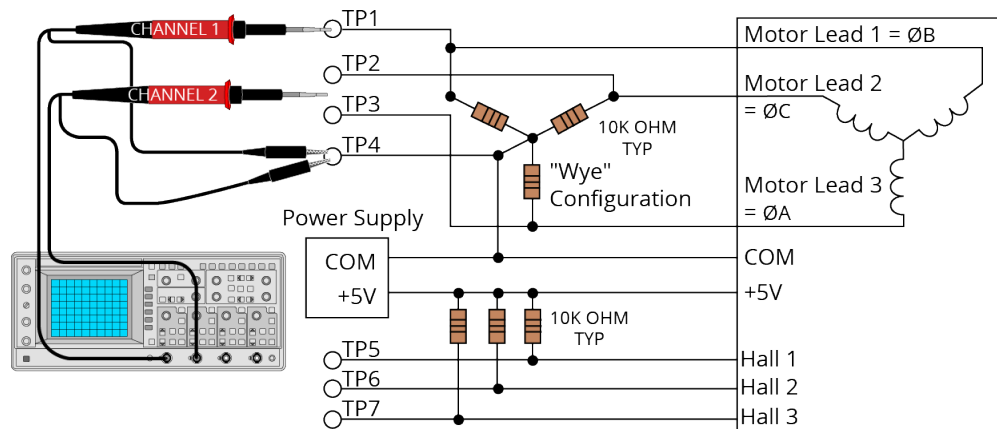Figure 2-7: Brushless Motor Phasing Oscilloscope Example



With the designations of the motor and Hall leads of a third party motor determined, the motor can now be connected to an Aerotech system. Connect motor lead A to motor connector A, motor lead B to motor connector B, and motor lead C to motor connector C. Hall leads should also be connected to their respective feedback connector pins (Hall A lead to the Hall A feedback pin, Hall B to Hall B, and Hall C to Hall C). The motor is correctly phased when the Hall states align with the Back EMF as shown in [Figure 2-8](#). Use the CommutationOffset parameter to correct for Hall signal misalignment.

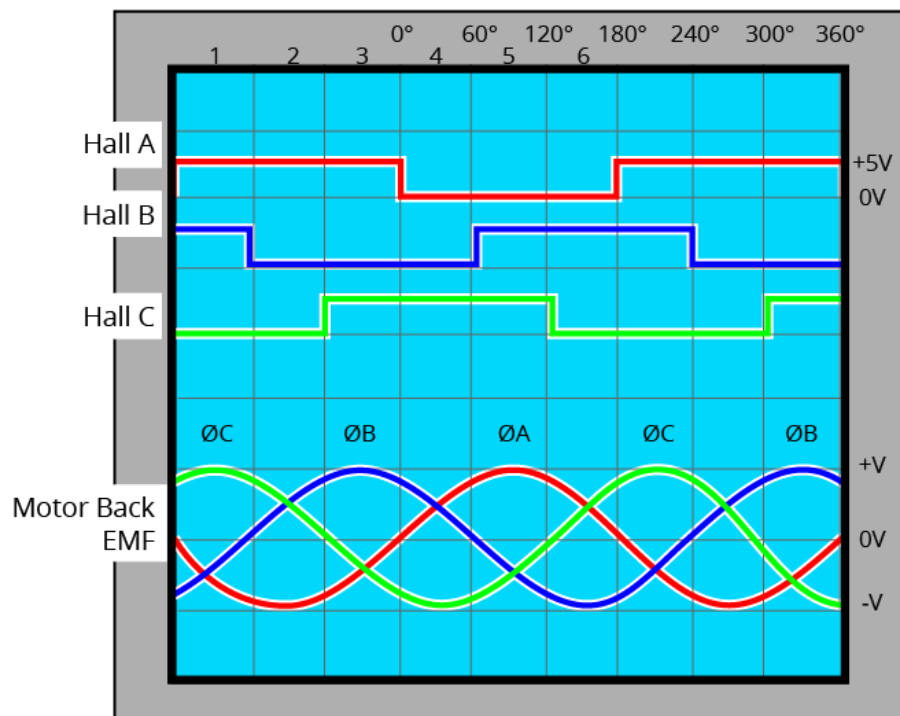
Figure 2-8: Brushless Motor Phasing Goal



2.3. Feedback Connector

The connector pin assignment is shown in [Table 2-10](#) with detailed connection information in the following sections.

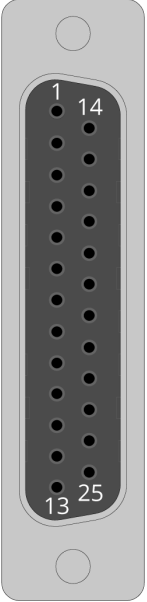Table 2-10: Feedback Connector Pinout

Pin #	Description	In/Out/Bi	Connector
1	Reserved	N/A	
2	Motor Over Temperature Thermistor	Input	
3	+5V Power ⁽¹⁾	Output	
4	Plug and Play Serial Data (for Aerotech stages only)	Bidirectional	
5	Hall-Effect Sensor B (brushless motors only)	Input	
6	Encoder Marker Reference Pulse -	Input	
	Absolute Encoder Clock -	Output	
7	Encoder Marker Reference Pulse +	Input	
	Absolute Encoder Clock +	Output	
8	Absolute Encoder Data -	Bidirectional	
9	Reserved	N/A	
10	Hall-Effect Sensor A (brushless motors only)	Input	
11	Hall-Effect Sensor C (brushless motors only)	Input	
12	Clockwise End of Travel Limit	Input	
13	Brake Output -	Output	
14	Encoder Cosine +	Input	
15	Encoder Cosine -	Input	
16	+5V Power ⁽¹⁾	Output	
17	Encoder Sine +	Input	
18	Encoder Sine -	Input	
19	Absolute Encoder Data+	Bidirectional	
20	Signal Common	Output	
21	Signal Common	Output	
22	Home Switch Input	Input	
23	Encoder Fault Input	Input	
24	Counterclockwise End of Travel Limit	Input	
25	Brake Output +	Output	

(1) The maximum combined current output is 500 mA.

Table 2-11: Feedback Mating Connector Ratings

Specification	25-Pin Solder Cup	Backshell
Aerotech Part Number	ECK00101	ECK00656
Amphenol Part Number ⁽¹⁾	DB25P064TXLF	17E-1726-2
Maximum Wire Size	20 AWG (0.5 mm ²)	N/A

(1) Refer to the manufacturer website for additional information.

2.3.1. Primary Encoder Inputs

The primary encoder inputs are accessible through the Feedback connector. Use the PrimaryFeedbackType parameter to configure the drive to accept an encoder signal type.

Square Wave encoder signals: [Section 2.3.1.1.](#)

Absolute encoder signals: [Section 2.3.1.2.](#)

Sine Wave encoder signals (as permitted by the multiplier option): [Section 2.3.1.3.](#)

Refer to [Section 2.3.1.4.](#) for encoder feedback phasing.

Refer to [Section 2.5.](#) for the auxiliary encoder on the Aux I/O connector.

Table 2-12: Multiplier Options

Option	Primary Encoder Accepts...	Auxiliary Encoder Accepts...
-MX0	Square Wave or Absolute encoders	Square Wave or Absolute encoders
-MX2	Sine Wave (high performance), Square Wave, or Absolute encoders	Square Wave or Absolute encoders
-MX3	Sine Wave (high performance), Square Wave, or Absolute encoders	Sine Wave (standard performance), Square Wave, or Absolute encoders



IMPORTANT: Physically isolate the encoder wiring from motor, AC power, and all other power wiring

Table 2-13: Primary Encoder Pins on the Feedback Connector

Pin #	Description	In/Out/Bi
3	+5V Power ⁽¹⁾	Output
6	Encoder Marker Reference Pulse -	Input
	Absolute Encoder Clock -	Output
7	Encoder Marker Reference Pulse +	Input
	Absolute Encoder Clock +	Output
8	Absolute Encoder Data -	Bidirectional
14	Encoder Cosine +	Input
15	Encoder Cosine -	Input
16	+5V Power ⁽¹⁾	Output
17	Encoder Sine +	Input
18	Encoder Sine -	Input
19	Absolute Encoder Data+	Bidirectional
20	Signal Common	Output
21	Signal Common	Output


(1) The maximum combined current output is 500 mA.

2.3.1.1. Square Wave Encoder (Primary)

The drive accepts RS-422 square wave encoder signals. The drive will generate a feedback fault if it detects an invalid signal state caused by an open or shorted signal connection. Use twisted-pair wiring for the highest performance and noise immunity.

Table 2-14: Square Wave Encoder Specifications

Specification	Value
Encoder Frequency	10 MHz maximum (25 ns minimum edge separation)
x4 Quadrature Decoding	40 million counts/sec

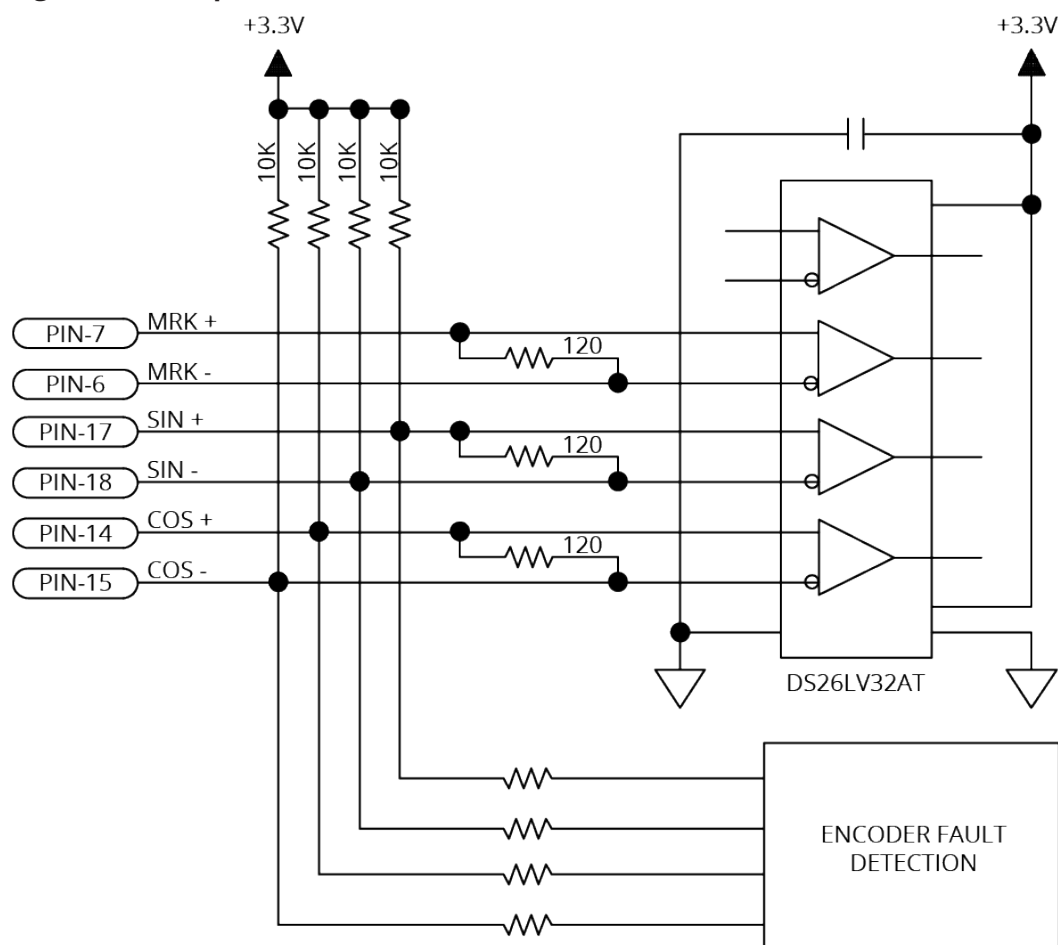Figure 2-9: Square Wave Encoder Schematic (Feedback Connector)


2.3.1.2. Absolute Encoder (Primary)

The drive retrieves absolute position data along with encoder fault information through a serial data stream from the absolute encoder. Use twisted-pair wiring for the highest performance and noise immunity. You cannot echo an absolute encoder signal.

Refer to [Figure 2-10](#) for the serial data stream interface.

Refer to the [Help file](#) for information on how to set up your EnDat or BiSS absolute encoder parameters.

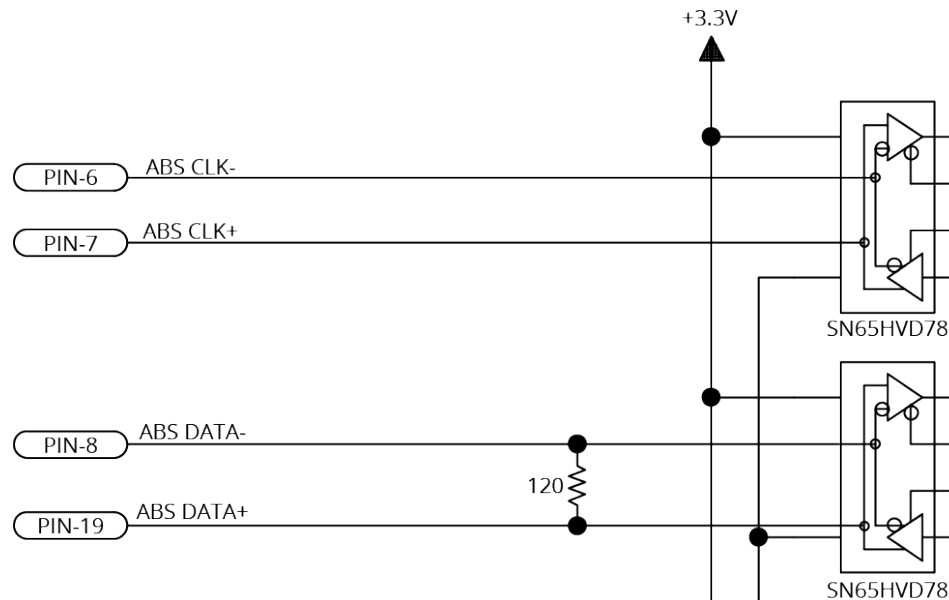Figure 2-10: Absolute Encoder Schematic (Feedback Connector)



2.3.1.3. Sine Wave Encoder (Primary) [-MX2/-MX3 Option]

The Sine Wave Encoder option provides higher positioning resolution by subdividing the fundamental output period of the encoder into smaller increments. The amount of subdivision is specified by the PrimaryEncoderMultiplicationFactor parameter. Use Encoder Tuning to adjust the value of the gain, offset, and phase balance controller parameters to get the best performance. For more information, refer to the [Help file](#).

High resolution or high-speed encoders can require increased bandwidth for correct operation. Use the High Speed Mode of the PrimaryEncoderMultiplierSetup parameter to enable the high bandwidth mode. Because this mode increases sensitivity to system noise, use it only if necessary.

The drive can generate emulated encoder signals. These signals can be output on the Auxiliary Encoder (AUX) connector, SYNC port connector, or used internally by the PSO. Refer to the EncoderDivider and PrimaryEmulatedQuadratureDivider parameters and the encoder output functions in the Help file for more information.

For the highest performance, use twisted pair double-shielded cable with the inner shield connected to signal common and the outer shield connected to frame ground. Do not join the inner and outer shields in the cable.

Table 2-15: Sine Wave Encoder Specifications

Specification		Value	
		Primary	Auxiliary
Input Frequency (max)		450 kHz, 2 MHz	450 kHz
Input Amplitude ⁽¹⁾		0.6 to 1.75 Vpk-pk	
Interpolation Factor (max)	-MX2	65,536	N/A
	-MX3	65,536	16,384
-MX2/-MX3 Primary Encoder Channel Interpolation Latency		800 nsec (analog input to quadrature output)	
Input Common Mode		1.5 to 3.5 VDC	
(1) Measured as SIN(+) - SIN(-) or COS(+) - COS(-)			

Figure 2-11: Sine Wave Encoder Phasing Reference Diagram

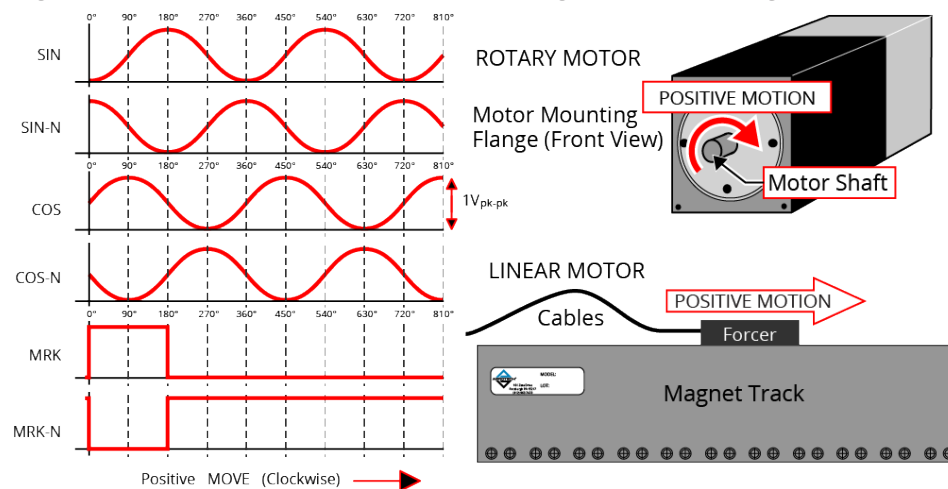
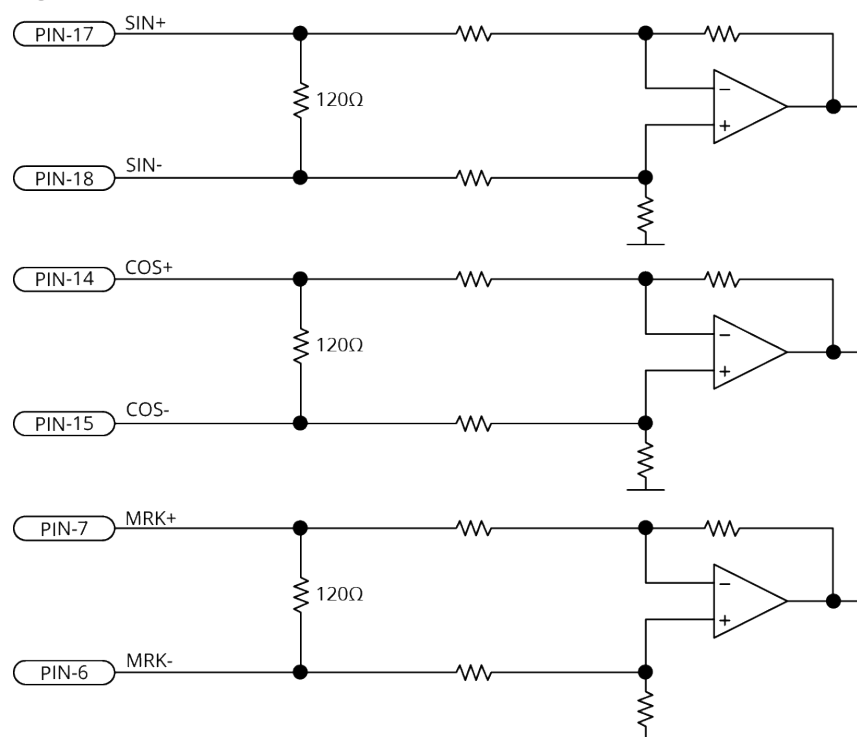



Figure 2-12: Sine Wave Encoder Schematic (Feedback Connector)

2.3.1.4. Encoder Phasing

Incorrect encoder polarity will cause the system to fault when enabled or when a move command is issued. [Figure 2-13](#) illustrates the proper encoder phasing for clockwise motor rotation (or positive forcer movement for linear motors). To verify, move the motor by hand in the CW (positive) direction while observing the position of the encoder in the diagnostics display (see [Figure 2-14](#)).


For dual loop systems, the velocity feedback encoder is displayed in the diagnostic display ([Figure 2-14](#)).

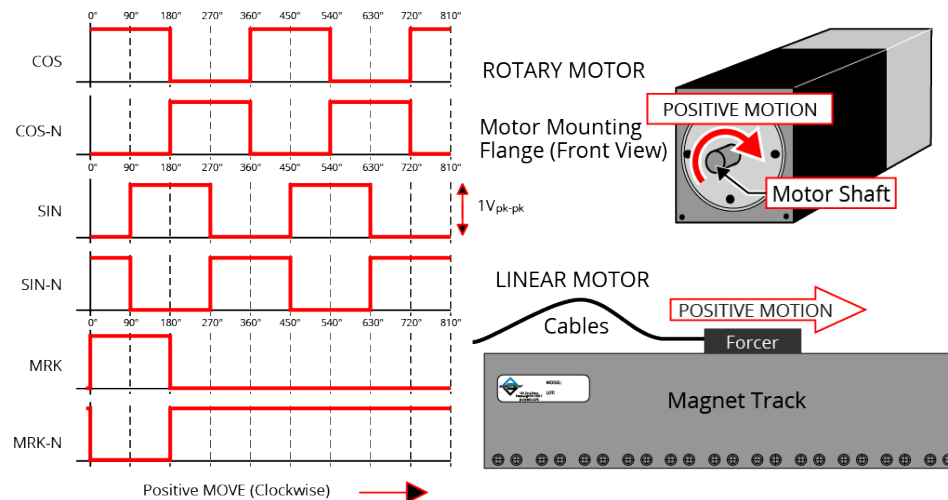Figure 2-13: Encoder Phasing Reference Diagram (Standard)



IMPORTANT: Encoder manufacturers may refer to the encoder signals as A, B, and Z. The proper phase relationship between signals is shown in [Figure 2-13](#).

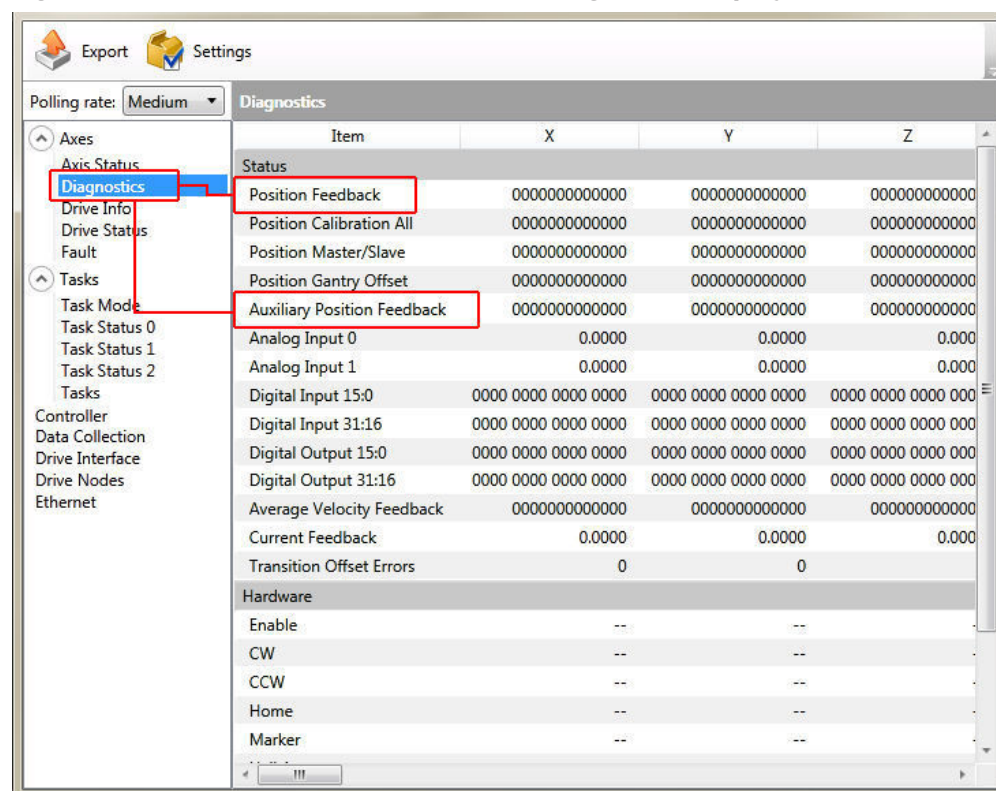Figure 2-14: Position Feedback in the Diagnostic Display



2.3.2. Hall-Effect Inputs

The Hall-effect switch inputs are recommended for AC brushless motor commutation but not absolutely required. The Hall-effect inputs accept 5 VDC level signals. Hall states (0,0,0) or (1,1,1) are invalid and will generate a "Hall Fault" axis fault.


Refer to [Section 2.2.1.1](#), for Hall-effect device phasing.

Table 2-16: Hall-Effect Feedback Pins on the Feedback Connector

Pin #	Description	In/Out/Bi
3	+5V Power ⁽¹⁾	Output
5	Hall-Effect Sensor B (brushless motors only)	Input
10	Hall-Effect Sensor A (brushless motors only)	Input
11	Hall-Effect Sensor C (brushless motors only)	Input
16	+5V Power ⁽¹⁾	Output
20	Signal Common	Output
21	Signal Common	Output

(1) The maximum combined current output is 500 mA.

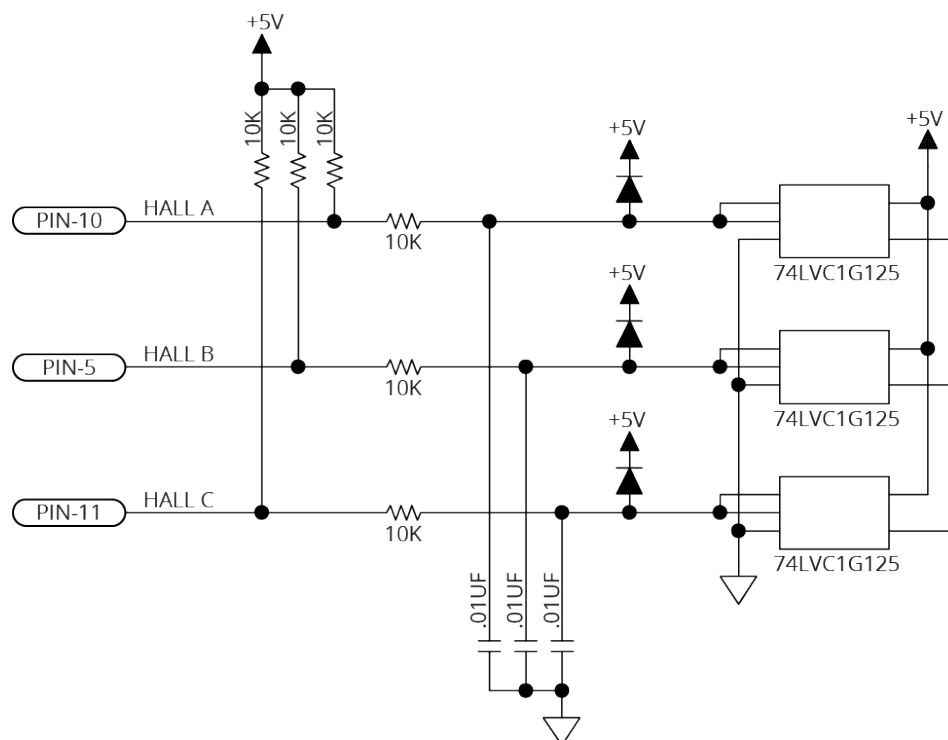Figure 2-15: Hall-Effect Inputs Schematic (Feedback Connector)



2.3.3. Thermistor Input


The thermistor input is used to detect a motor over temperature condition by using a positive temperature coefficient sensor. As the temperature of the sensor increases, so does the resistance. Under normal operating conditions, the resistance of the thermistor is low which will result in a low input signal. As the increasing temperature causes the resistance of the thermistor to increase, the sensor will trigger an over temperature fault.

The thermistor is connected between Pin 2 and Signal Common. The nominal trip value of the sensor is 1.385 k Ω . The circuit includes a 12 k Ω internal pull-up resistor which corresponds to a trip voltage of +0.52 V.

Table 2-17: Thermistor Input Pin on the Feedback Connector

Pin #	Description	In/Out/Bi
2	Motor Over Temperature Thermistor	Input

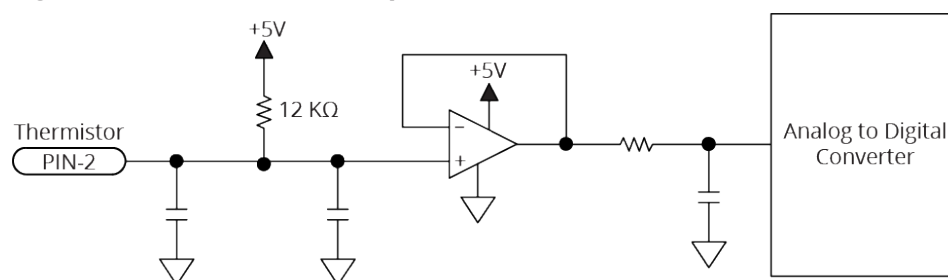Figure 2-16: Thermistor Input Schematic (Feedback Connector)




2.3.4. Encoder Fault Input

The encoder fault input is for use with encoders that have a fault output. This is provided by some manufacturers and indicates a loss of encoder function. The active state of this input is parameter configurable and the controller should be configured to disable the axis when the fault level is active. The nominal trip voltage of the encoder fault input is +2.5 V.

Table 2-18: Encoder Fault Input Pin on the Feedback Connector

Pin #	Description	In/Out/Bi
23	Encoder Fault Input	Input

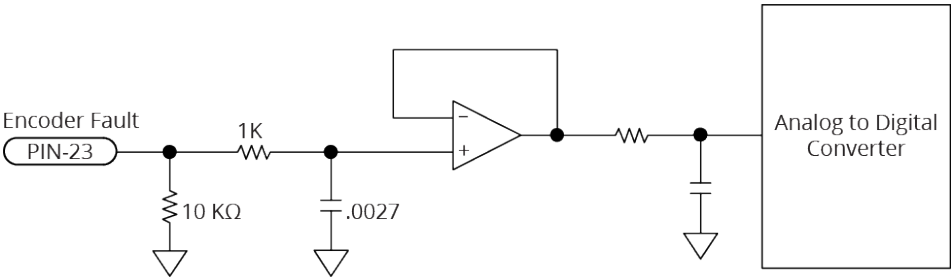Figure 2-17: Encoder Fault Input Schematic (Feedback Connector)



2.3.5. End of Travel and Home Limit Inputs

End of Travel (EOT) limits are required to define the end of the physical travel on linear axes. Positive or clockwise motion is stopped by the clockwise (CW) end of travel limit input. Negative or counterclockwise motion is stopped by the counterclockwise (CCW) end of travel limit input. The Home Limit switch can be parameter configured for use during the home cycle, however, the CW or CCW EOT limit is typically used instead. All of the end-of-travel limit inputs accept 0-24 VDC level signals. Limit directions are relative to the encoder polarity in the diagnostics display (refer to [Figure 2-20](#)).



Table 2-19: End of Travel and Home Limit Pins on the Feedback Connector

Pin #	Description	In/Out/Bi
12	Clockwise End of Travel Limit	Input
16	+5V Power	Output
20	Signal Common	Output
21	Signal Common	Output
22	Home Switch Input	Input
24	Counterclockwise End of Travel Limit	Input

The active state (High/Low) of the EOT limits is software selectable (by the EndOfTravelLimitSetup axis parameter). [Figure 2-18](#) shows the possible wiring configurations for normally-open and normally-closed switches and the parameter setting to use for each configuration.




IMPORTANT: Use NPN-type normally-closed limit switches (Active High) to provide fail-safe behavior in the event of an open circuit.

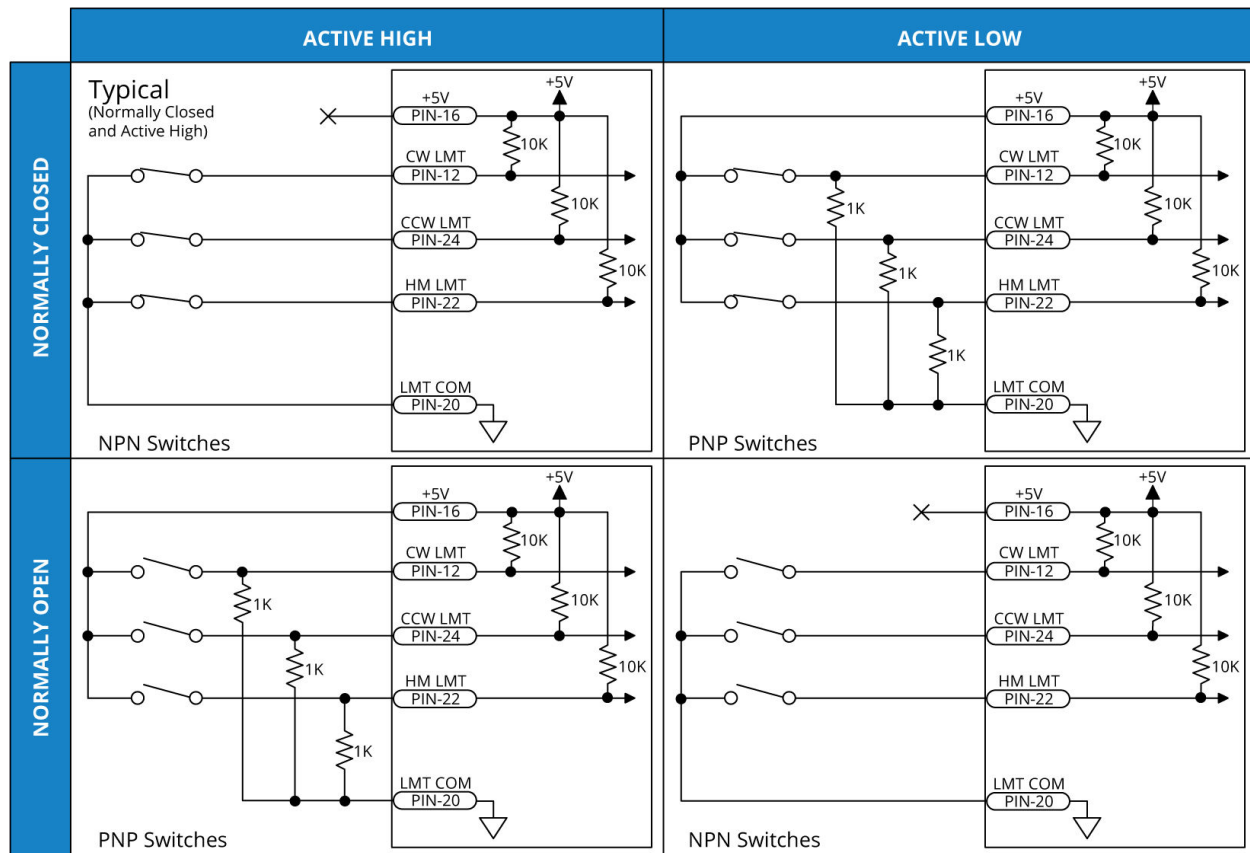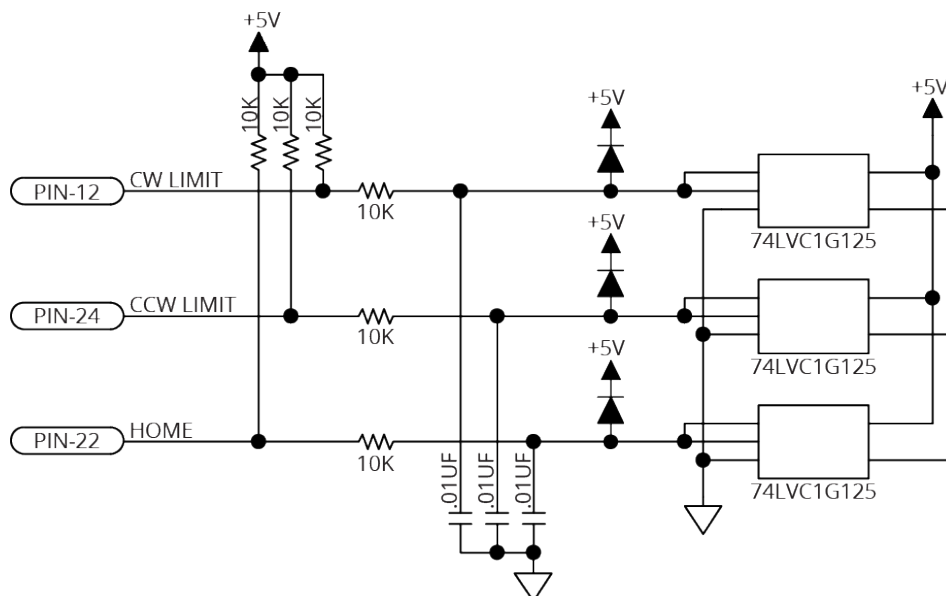Figure 2-18: End of Travel and Home Limit Input Connections**Figure 2-19: End of Travel and Home Limit Input Schematic (Feedback Connector)**

2.3.5.1. End of Travel and Home Limit Phasing

If the EOT limits are reversed, you will be able to move further into a limit but be unable to move out. To correct this, swap the connections to the CW and CCW inputs at the Feedback connector or swap the CW and CCW limit functionality in the software using the EndOfTravelLimitSetup parameter. View the logic level of the EOT limit inputs in the Diagnostics display (shown in [Figure 2-20](#)).

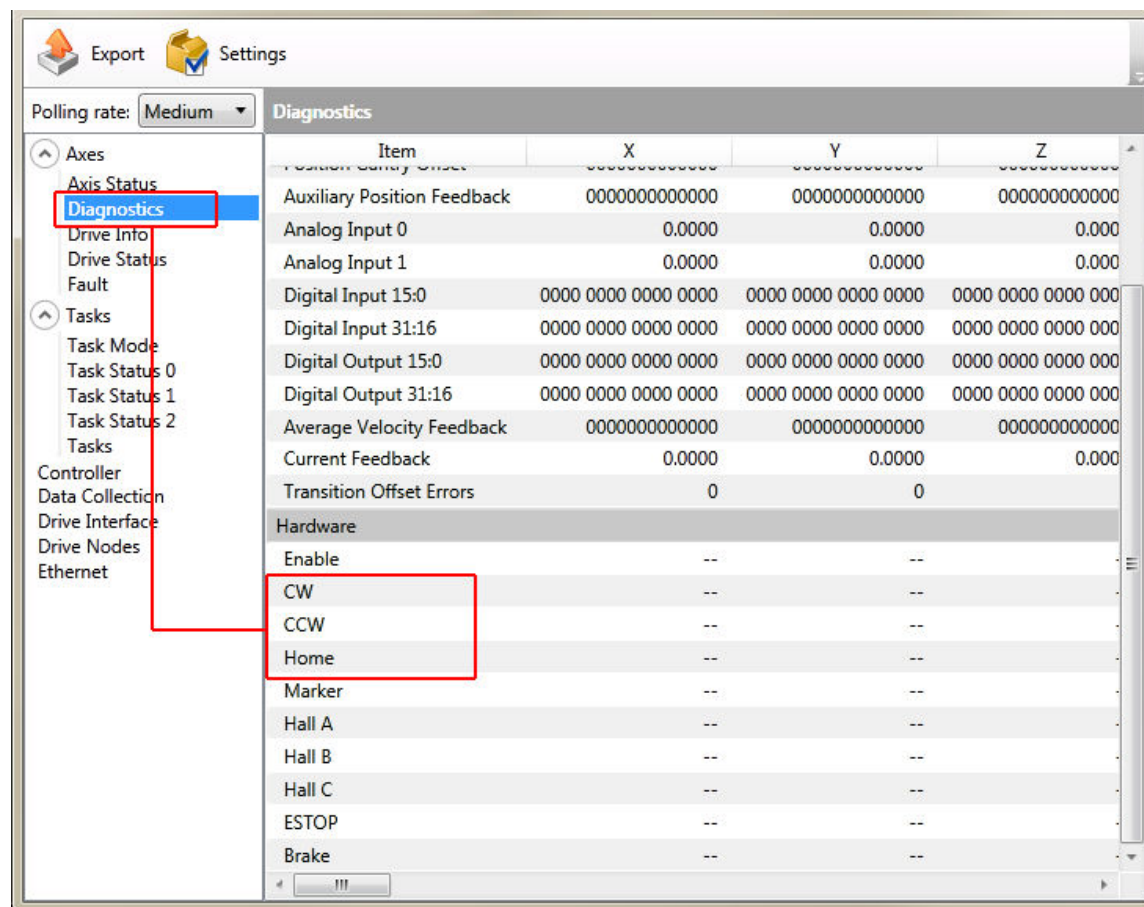Figure 2-20: End of Travel and Home Limit Input Diagnostic Display



2.3.6. Brake Outputs

The drive has a dedicated brake control circuit. Configure the brake with the BrakeSetup parameter for automatic control (typical). You can also use software commands to directly control the brake output.

Refer to [Section 2.6](#) for more information on powering the brake circuit.

Table 2-20: Brake Output Pins on the Feedback Connector


Pin #	Description	In/Out/Bi
13	Brake Output -	Output
25	Brake Output +	Output

Table 2-21: Brake Control Specifications

Specification	Value
Maximum Voltage	24 VDC
Maximum Current	1 A

A varistor must be connected across the brake to minimize voltage transients.

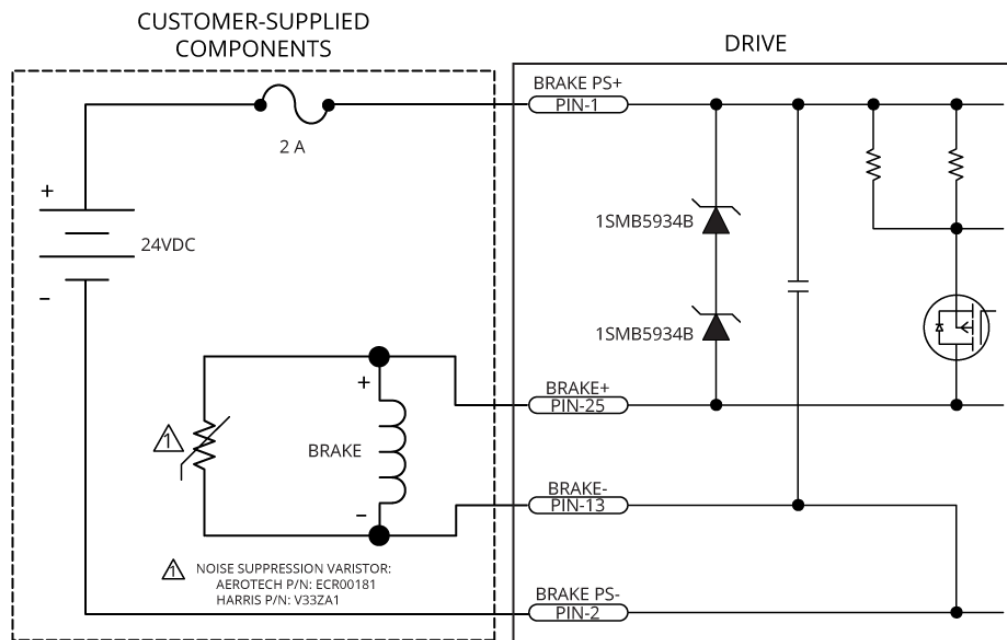Figure 2-21: Brake Connected to the 25-Pin Feedback Connector (Typical)



2.4. Safe Torque Off Input (STO)

The STO circuit is comprised of two identical channels, each of which must be energized in order for the drive to produce motion. Each STO input is opto-isolated and accepts 24 V levels directly without the need for external current limiting resistors.



IMPORTANT: The drive might be equipped with an STO bypass circuit board. The bypass circuit board defeats the STO safety circuit and allows the system to run at all times. To use the STO safety functionality, remove the circuit board and make connections as outlined in this section.



IMPORTANT: The application circuit and its suitability for the desired safety level is the sole responsibility of the user of the drive.



WARNING: STO wires must be insulated to prevent short circuits between connector pins. The primary concern is a short circuit between STO 1 IN and STO 2 IN wire strands.

Table 2-22: STO Connector Pinout

Pin #	Signal	Description	In/Out/Bi	Connector
1	Power Supply +	Use only to defeat STO by connecting to STO 1 IN and STO 2 IN. Not for customer use.	Output	
2	STO 1 IN	STO Channel 1 Positive Input	Input	
3	RETURN	STO Negative Input	Input	
4	STO 2 IN	STO Channel 2 Positive Input	Input	
5	Power Supply -	Use only to defeat STO by connecting to RETURN. Not for customer use.	Output	

Table 2-23: STO Mating Connector Ratings

Specification		Description
Type		5-Pin Terminal Block
Part Numbers		Aerotech: ECK02393
		Phoenix: 1827622
Conductor Cross Section	One conductor, stranded with ferrule and plastic sleeve	18...22 AWG (0.25...0.75 mm ²)
	Two conductors (same cross-section), stranded, twin ferrule with plastic sleeve	20 AWG (0.5 mm ²)
Tightening Torque		0.22...0.25 N·m
Conductor Insulation Strip Length		7 mm (0.25 in)
(1) Refer to the manufacturer website for additional information.		


Table 2-24: STO Electrical Specifications

Status	Value
STO off (motion allowed)	18-24 V, 7 ma
STO on (safe state entered, no motion)	0-6 V
Recommended Wire Gauge	22-26 AWG (0.5 - 0.14 mm ²)
STO System Power Supply	PELV
STO Wire Length (maximum)	50 m

Figure 2-22 shows one safety device connected to multiple drives in parallel.



WARNING: The drive does not check for short circuits on the external STO wiring. If this is not done by the external safety device, short circuits on the wiring must be excluded. Refer to EN ISO 13849-2. For Category 4 systems, the exclusion of short circuits is mandatory.

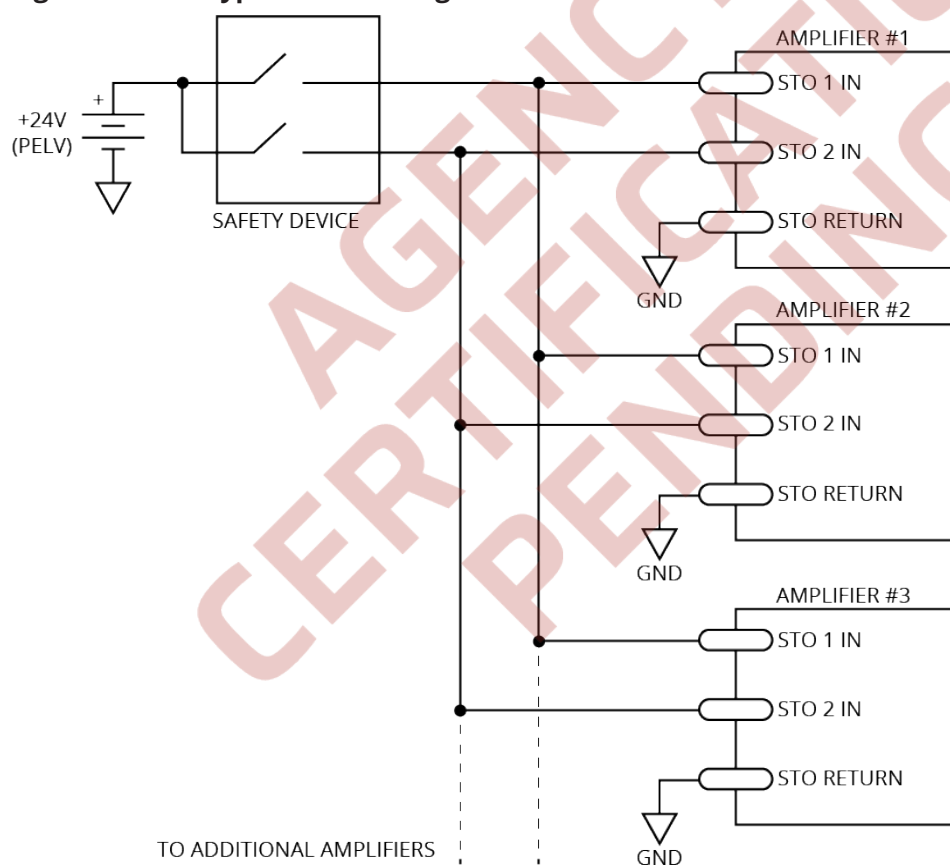Figure 2-22: Typical STO Configuration

2.4.1. STO Standards

Table 2-25 describes and specifies the safety requirements at the system level for the Safe Torque Off (STO) feature of the drive. This assumes that diagnostic testing is performed according to Section 2.4.4. and Table 2-26.

Table 2-25: STO Standards

Standard	Maximum Achievable Safety
EN/IEC 61800-5- 2:2016	SIL 3
EN/IEC 61508-1:2010	SIL 3
EN/IEC 61508-2:2010	SIL 3
EN ISO 13849-1:2015	Category 4, PL e
EN/IEC 62061:2005 with Amendments	SIL 3

Table 2-26: STO Standards Data

Standard	Value
EN ISO 13849-1:2015	MTTF _D > 1000 years, DC _{AVG} 99% Maximum PL e, Category 4
EN ISO 13849-1:2015 EN/IEC 61508	Lifetime = 20 years No proof test required Interval for manual STO test: <ul style="list-style-type: none"> Once per year for SIL2/PL d/category 3 Once per three months for SIL3/PL e/category 3 Once per day for SIL3/PL e/category 4
EN/IEC 61508	SIL3 PFH < 3 FIT SFF > 99%

2.4.2. STO Functional Description

The motor can only be activated when voltage is applied to both STO 1 and STO 2 inputs. The STO state will be entered if power is removed from either the STO 1 or the STO 2 inputs. When the STO state is entered, the motor cannot generate torque or force and is therefore considered safe.

The STO function is implemented with two redundant channels in order to meet stated performance and SIL levels. STO 1 disconnects the high side power amplifier transistors and STO 2 disconnects the low side power amplifier transistors. Disconnecting either set of transistors effectively prevents the drive from being able to produce motion.

The drive software monitors each STO channel and will generate an Emergency Stop software fault when either channel signals the stop state. Each STO channel contains a fixed delay which allows the drive to perform a controlled stop before the power amplifier transistors are turned off.

A typical configuration requiring a controlled stop has the Emergency Stop Fault mask bit set in the FaultMask, FaultMaskDecel, and FaultMaskDisable parameters. This stops the axis using the rate specified by the AbortDecelRate parameter. The software will disable the axis as soon as the deceleration ramp is complete. This is typically configured to occur before the STO channel turns off the power amplifier transistors.

The software controlled stop functionality must be excluded when considering overall system safety. This is because the software is not safety rated and cannot be included as part of the safety function.

The drive will tolerate short diagnostic pulses on the STO 1+ and STO 2+ inputs. The parameter "STOPulseFilter" specifies the maximum pulse width that the drive will ignore.

To resume normal operation, apply power to both STO 1 and STO 2 inputs and use the *Acknowledge All* button or the AcknowledgeAll() or FaultAcknowledge() function to clear the Emergency Stop software fault. The recommended use of the Emergency Stop Fault fault mask bits prevent the system from automatically restarting.

You can achieve longer delay times through the use of an external delay timer, such as the Omron G9SA-321 Safety Relay Unit. Place this device between the system ESTOP wiring and the drive's STO inputs. Connect the ESTOP signal directly to a digital input, in addition to the external timer, to allow the drive to begin a software-controlled stop as soon as the ESTOP signal becomes active. Use the EmergencyStopFaultInput parameter to configure a digital input as an ESTOP input.

Non-standard STO delay times are provided by special factory order. In this case, the non-standard STO delay time is indicated by a label placed on the slice amplifier's main connector (STO DELAY = xx sec).

Table 2-27: STO Signal Delay

	Value
STO Time Delay	450-550 msec

Table 2-28: Motor Function Relative to STO Input State

STO 1	STO 2	Motor Function
Unpowered	Unpowered	No force/torque
Unpowered ⁽¹⁾	Powered ⁽¹⁾	No force/torque
Powered ⁽¹⁾	Unpowered ⁽¹⁾	No force/torque
Powered	Powered	Normal Operation
1. This is considered a Fault Condition since STO 1 and STO 2 do not match. Refer to Section 2.4.4 .		

2.4.3. STO Startup Validation Testing

Verify the state of the STO 1 and STO 2 channels by manually activating the external STO hardware. Each STO channel must be tested separately in order to detect potential short circuits between the channels. The current state of the STO 1 and STO 2 inputs is shown in the Status Utility. A “–” indicates that the STO input is powered by a high voltage level (24 V). An “ON” indicates that the voltage source has been removed from the input (open circuit or 0 V), and that the STO channel is in the safe state.



DANGER: The STO circuit does not remove lethal voltage from the motor terminals. AC mains power must be removed before servicing.

2.4.4. STO Diagnostics


Activation of STO means removing power from the drive's STO inputs. This is typically done by pressing the emergency stop switch. The drive initiates a diagnostic check every time the STO is activated after the Diagnostic Test Delay Time has elapsed. The diagnostic check verifies that each channel has entered the safe state. The drive is held in the safe state if it determines that one of the channels has not properly entered the safe state. An open circuit or short to 24 V in either STO channel will result in this condition (refer to [Section 2.4.3.](#)). The Status Utility screen can be used to verify the levels of the STO input signals while trouble shooting.

In order to meet the listed SIL level, the STO circuit must be activated (power removed from both inputs) according to the interval specified in [Table 2-26.](#)

Table 2-29: STO Timing

Time	Description	Value
T1	STO Delay Time (STO input active to motor power off)	450-550 msec
T2	STO deactivated to motor power on (the software is typically configured so that the motor does not automatically re-energize).	< 1 msec
T3	Diagnostic Test Delay Time	550-610 msec

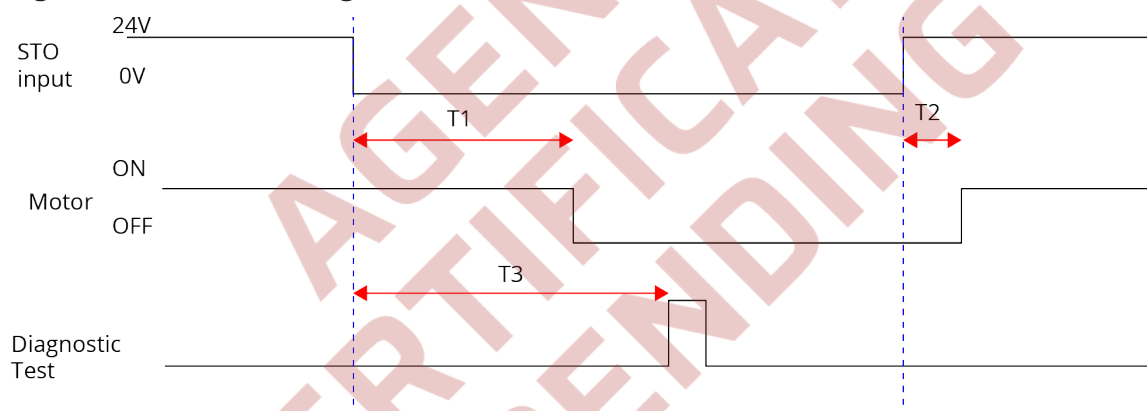Figure 2-23: STO Timing



The software is typically configured to execute a controlled stop when the STO state is first detected. If power is reapplied to the STO inputs before the STO Delay Time, an STO hardware shutdown will not occur but a software stop may, depending on the width of the STO pulse. The controller will ignore STO active pulses shorter in length than the STOPulseFilter parameter setting.

2.5. Auxiliary I/O Connector

The Auxiliary I/O connector has 1 analog input, 6 digital inputs, 1 analog output, 4 digital outputs, a secondary line driver encoder input, and a secondary absolute encoder interface.

Table 2-30: Auxiliary I/O Connector Pinout

Pin#	Description	In/Out/Bi	Connector
1	Auxiliary Sine +	Bidirectional	
	Absolute Encoder Data +	Bidirectional	
2	Auxiliary Sine -	Bidirectional	
	Absolute Encoder Data -	Bidirectional	
3	High-Speed Input 20 + / PSO External Sync. +	Input	
4	High-Speed Input 20 - / PSO External Sync. -	Input	
5	High-Speed Input 21 +	Input	
6	High-Speed Input 21 -	Input	
7	Digital Output 0	Output	
8	Digital Output 1	Output	
9	Digital Output 2	Output	
10	Auxiliary Cosine +	Bidirectional	
	Absolute Encoder Clock +	Output	
11	Auxiliary Cosine-	Bidirectional	
	Absolute Encoder Clock -	Output	
12	+5 Volt (500 mA max)	Output	
13	Analog Input 0+ (Differential)	Input	
14	Analog Input 0- (Differential)	Input	
15	Digital Output Common	Output	
16	Digital Output 3	Output	
17	Digital Input 0 / CCW EOT Input ⁽¹⁾	Input	
18	Digital Input 1 / CW EOT Input ⁽¹⁾	Input	
19	Auxiliary Marker - / PSO ⁽²⁾ Differential Output - / PSO TTL Output	Bidirectional	
20	Auxiliary Marker + / PSO ⁽²⁾ Differential Output +	Bidirectional	
21	Common	Output	
22	Analog Output 0	Output	
23	Analog Common	Output	
24	Digital Input Common	Output	
25	Digital Input 2 / Home Input ⁽¹⁾	Input	
26	Digital Input 3	Input	

(1) Software configured option
 (2) For PSO, refer to [Section 2.5.2](#).

Table 2-31: Auxiliary I/O Mating Connector Ratings

Specification	26-Pin Solder Cup	Backshell
Aerotech Part Number	ECK01259	ECK01022
Manufacturer Part Number ⁽¹⁾	Kycon K86-AA-26P	Amphenol 17E-1725-2
Maximum Wire Size	22 AWG (0.25 mm ²)	N/A

(1) Refer to the manufacturer website for additional information.

2.5.1. Auxiliary Encoder Interface

The Auxiliary Encoder connector gives you a second encoder channel. This channel is typically used for dual loop applications.

Use the AuxiliaryFeedbackType parameter to configure the iXC6e/XC6e to accept an encoder signal type.

Square Wave encoder signals: [Section 2.5.1.1.](#)

Absolute encoder signals: [Section 2.5.1.2.](#)

Sine Wave encoder signals (with the -MX3 option): [Section 2.5.1.3.](#)

You can configure the Auxiliary Encoder interface as an output that will transmit encoder signals for external use. Use the DriveEncoderOutputConfigureInput() function to configure the Sine \pm and Cosine \pm connector pins as RS-422 outputs. You can only echo incremental square wave primary encoder inputs or, with the -MX2 or -MX3 option, incremental sine wave primary encoder inputs. You cannot use the absolute encoder interface when you echo incremental signals.

Table 2-32: Auxiliary Encoder Pins on the Auxiliary I/O Connector

Pin#	Description	In/Out/Bi
1	Auxiliary Sine +	Bidirectional
	Absolute Encoder Data +	Bidirectional
2	Auxiliary Sine -	Bidirectional
	Absolute Encoder Data -	Bidirectional
10	Auxiliary Cosine +	Bidirectional
	Absolute Encoder Clock +	Output
11	Auxiliary Cosine-	Bidirectional
	Absolute Encoder Clock -	Output
12	+5 Volt (500 mA max)	Output
19	Auxiliary Marker - / PSO ⁽²⁾ Differential Output - / PSO TTL Output	Bidirectional
20	Auxiliary Marker + / PSO ⁽²⁾ Differential Output +	Bidirectional
21	Common	Output


(2) For PSO, refer to [Section 2.5.2.](#)

2.5.1.1. Square Wave Encoder (Auxiliary)

The drive accepts RS-422 square wave encoder signals. The drive will generate a feedback fault if it detects an invalid signal state caused by an open or shorted signal connection. Use twisted-pair wiring for the highest performance and noise immunity.

Table 2-33: Square Wave Encoder Specifications

Specification	Value
Encoder Frequency	10 MHz maximum (25 ns minimum edge separation)
x4 Quadrature Decoding	40 million counts/sec

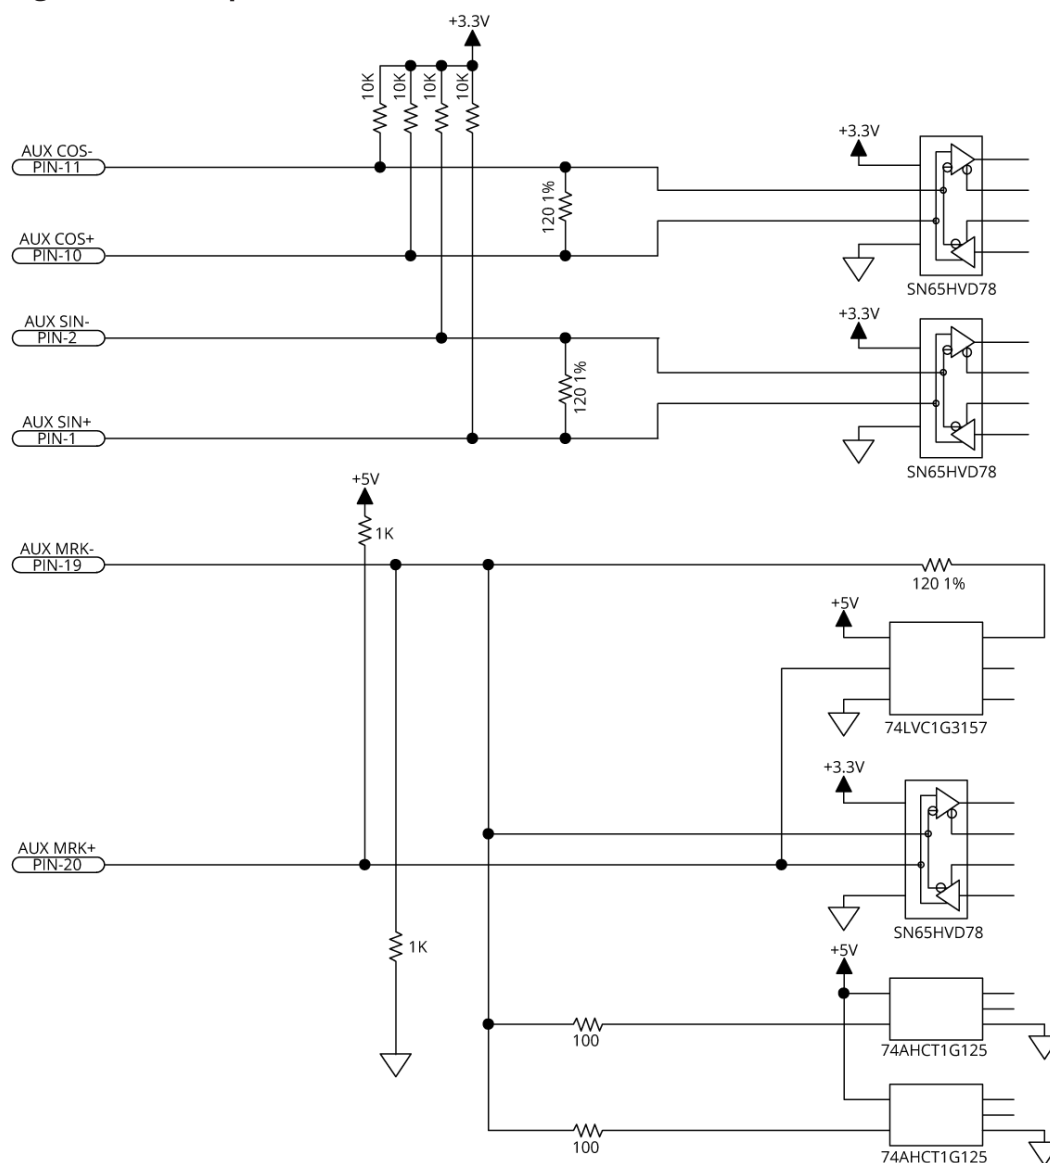Figure 2-24: Square Wave Encoder Interface (Aux I/O Connector)


2.5.1.2. Absolute Encoder (Auxiliary)

The drive retrieves absolute position data along with encoder fault information through a serial data stream from the absolute encoder. Use twisted-pair wiring for the highest performance and noise immunity. You cannot use an absolute encoder with incremental signals on the Auxiliary I/O Connector.

Refer to [Figure 2-25](#) for the serial data stream interface.

Refer to the [Help file](#) for information on how to set up your EnDat or BiSS absolute encoder parameters.

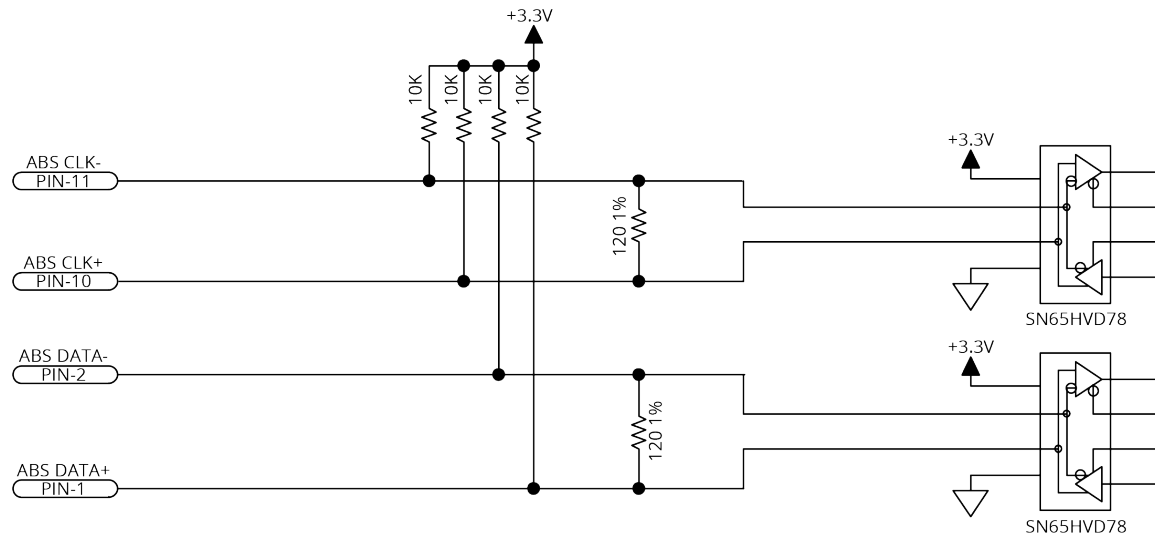Figure 2-25: Absolute Encoder Schematic (Auxiliary I/O Connector)



2.5.1.3. Sine Wave Encoder (Auxiliary) [-MX3 Option]

The Sine Wave Encoder option provides higher positioning resolution by subdividing the fundamental output period of the encoder into smaller increments. The amount of subdivision is specified by the AuxiliaryEncoderMultiplicationFactor parameter. Use Encoder Tuning to adjust the value of the gain, offset, and phase balance controller parameters to get the best performance. For more information, refer to the [Help file](#).

You cannot use the sine wave encoder on the auxiliary connector with the -MX3 multiplier option as an input to the PSO. The -MX3 option does not generate emulated quadrature signals from the auxiliary connector.

For the highest performance, use twisted pair double-shielded cable with the inner shield connected to signal common and the outer shield connected to frame ground. Do not join the inner and outer shields in the cable.

Table 2-34: Sine Wave Encoder Specifications

Specification		Value	
		Primary	Auxiliary
Input Frequency (max)		450 kHz, 2 MHz	450 kHz
Input Amplitude ⁽¹⁾		0.6 to 1.75 Vpk-pk	
Interpolation Factor (max)	-MX2	65,536	N/A
	-MX3	65,536	16,384
-MX2/-MX3 Primary Encoder Channel Interpolation Latency		800 nsec (analog input to quadrature output)	
Input Common Mode		1.5 to 3.5 VDC	
(1) Measured as SIN(+) - SIN(-) or COS(+) - COS(-)			

Figure 2-26: Sine Wave Encoder Phasing Reference Diagram

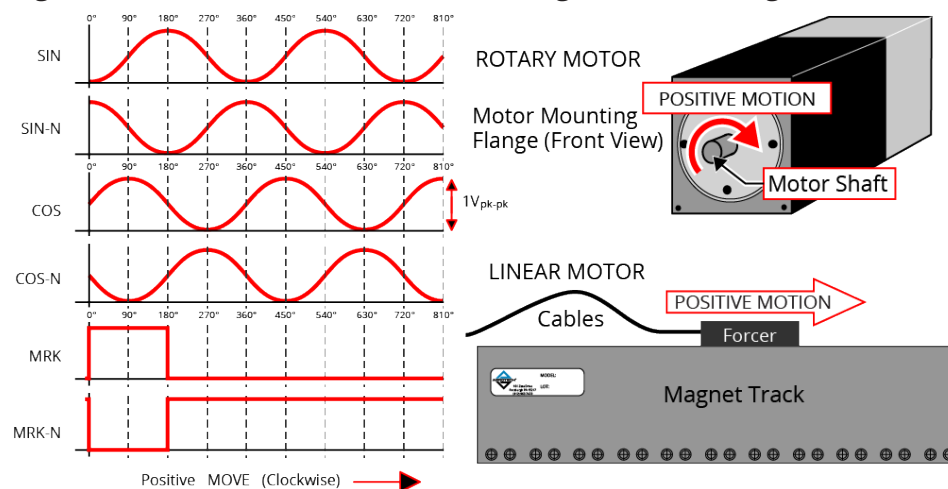
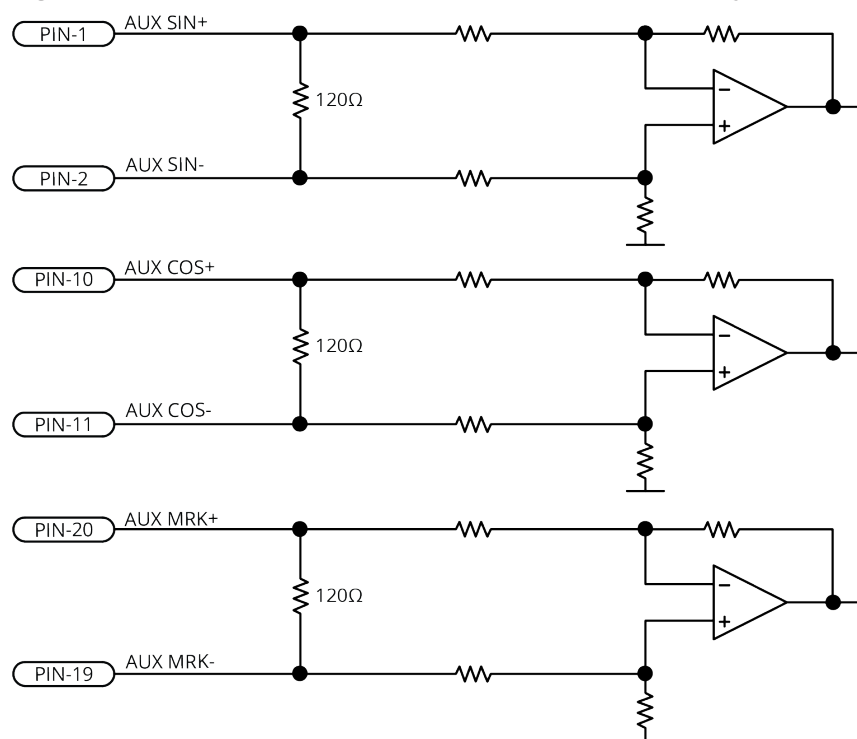


Figure 2-27: Sine Wave Encoder Schematic (Auxiliary I/O Connector)

2.5.2. Position Synchronized Output (PSO)

The PSO signal is available on the dual-function AUX Marker/PSO signal lines. Use the PSO pulse external sync functions to configure the auxiliary marker as an output. Refer to the Help file for more information.

Use the `PsoOutputConfigureOutput()` function to transmit the PSO output signal on the Marker \pm pins differentially. Or, use the `PsoOutputConfigureOutput()` function to configure the Marker - pin as a 5V TTL PSO output.

When configured for differential use with pin 19 as PSO Differential Output - and pin 20 as PSO Differential Output +, the PSO output is active low. [Figure 2-28](#) shows how the output pins are biased so that the output is in the OFF state when it is not actively driven. If you want an active high output, you can change the pins so that pin 19 is the PSO Differential Output + and pin 20 is the PSO Differential Output -.

The differential signal format is recommended when using long cable lengths in noisy environments or when high frequency pulse transmission is required. It is best to locate the line receiver close to the receiving electronics. A 5 V TTL signal is used to drive an opto coupler or general purpose TTL input. This signal is active high and is driven to 5 V when a PSO fire event occurs. When the drive is reset or after initial power up, the PSO pins (refer to [Table 2-36](#)), are not actively driven and the fail safe state is defined by pull-up and pull-down resistors as shown in [Figure 2-28](#).

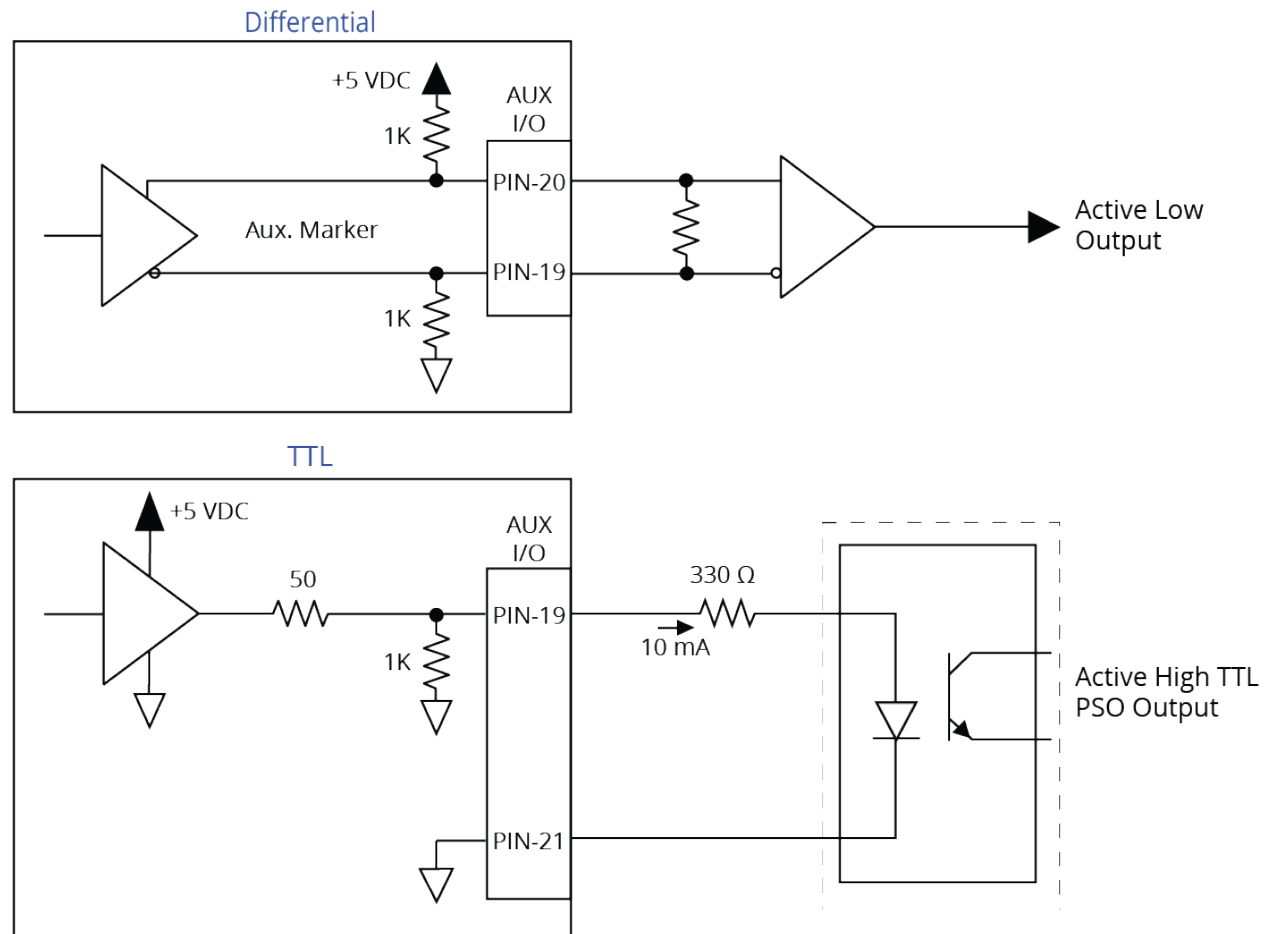
The -EB1 I/O option board has additional PSO signal formats. Refer to [Section 3.5](#) for more information.

Table 2-35: PSO Specifications

Specification		Value
Output	TTL	5 V, 16 mA (max)
Maximum PSO Output (Fire) Frequency	TTL	12.5 MHz
	RS-422	12.5 MHz
Output Latency [Fire event to output change]	TTL	15 ns
	RS-422	15 ns

Table 2-36: PSO Pins on the Auxiliary I/O Connector

Pin#	Description	In/Out/Bi
19	Auxiliary Marker - / PSO Differential Output - / PSO TTL Output	Bidirectional
20	Auxiliary Marker + / PSO Differential Output +	Bidirectional
21	Common	Output

Figure 2-28: PSO Interface

2.5.3. Digital Outputs

Optically-isolated solid-state relays drive the digital outputs. You can connect the digital outputs in current sourcing or current sinking mode but you must connect all four outputs in the same configuration. Refer to [Figure 2-30](#) and [Figure 2-31](#).

You must install suppression diodes on digital outputs that drive relays or other inductive devices. To see an example of a current sourcing output that has diode suppression, refer to [Figure 2-30](#). To see an example of a current sinking output that has diode suppression, refer to [Figure 2-31](#).

The digital outputs are not designed for high-voltage isolation applications and they should only be used with ground-referenced circuits.

The digital outputs have overload protection. They will resume normal operation when the overload is removed.

Table 2-37: Digital Output Specifications

Digital Output Specifications	Value
Maximum Voltage	24 V (26 V Maximum)
Maximum Sink/Source Current	250 mA/output
Output Saturation Voltage	0.9 V at maximum current
Output Resistance	3.7 Ω
Rise / Fall Time	250 μ s (2K pull up to 24V)
Reset State	Output Off (High Impedance State)

Table 2-38: Digital Output Pins on the Auxiliary I/O Connector

Pin#	Description	In/Out/Bi
7	Digital Output 0	Output
8	Digital Output 1	Output
9	Digital Output 2	Output
15	Digital Output Common	Output
16	Digital Output 3	Output

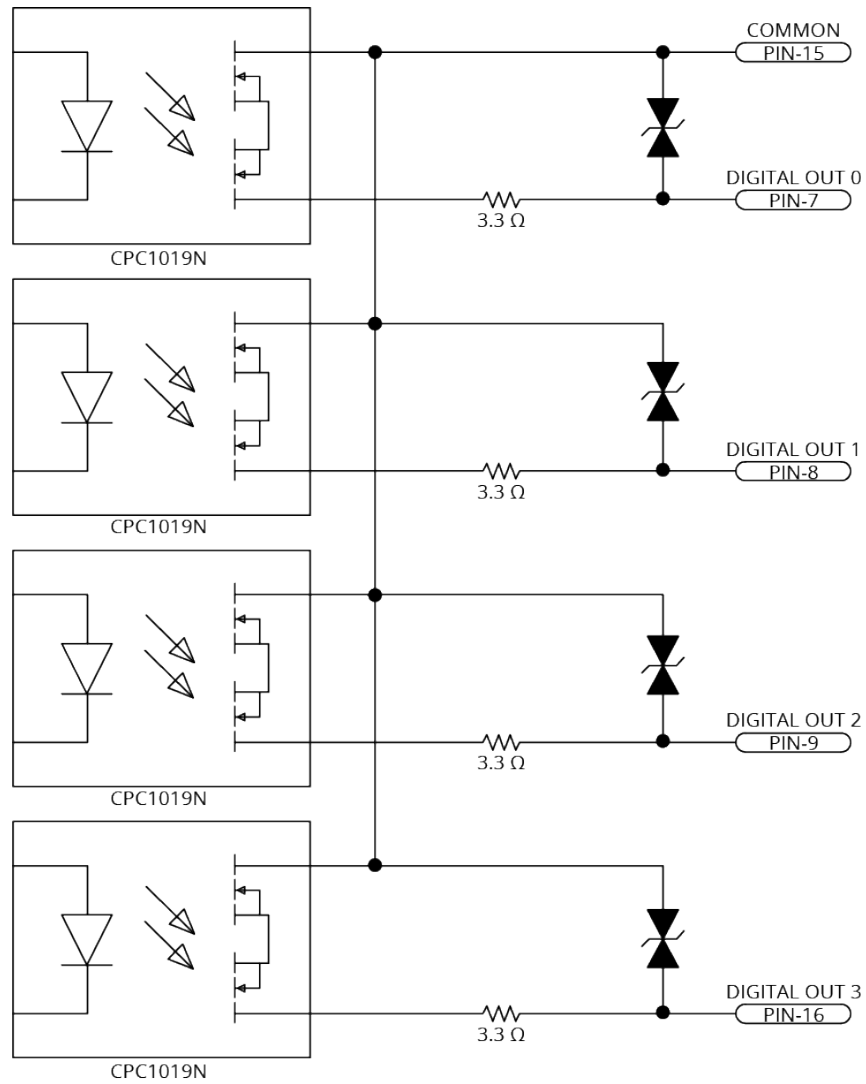
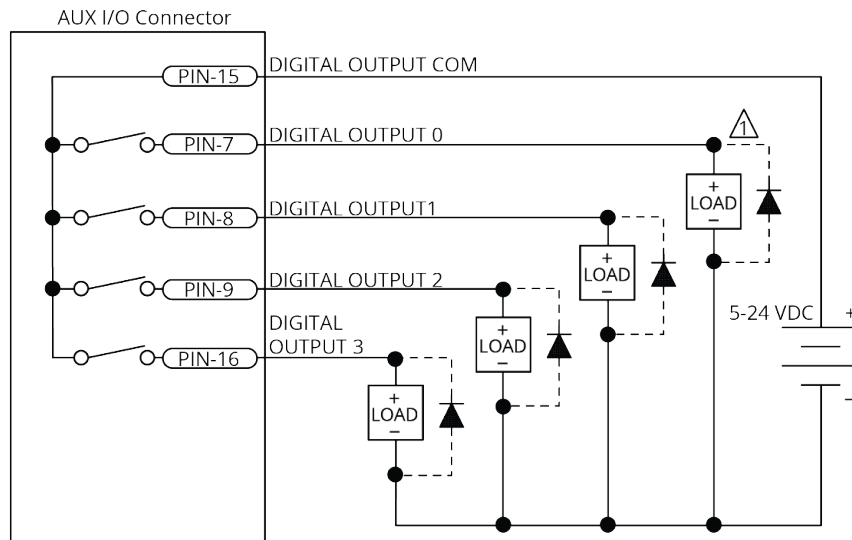
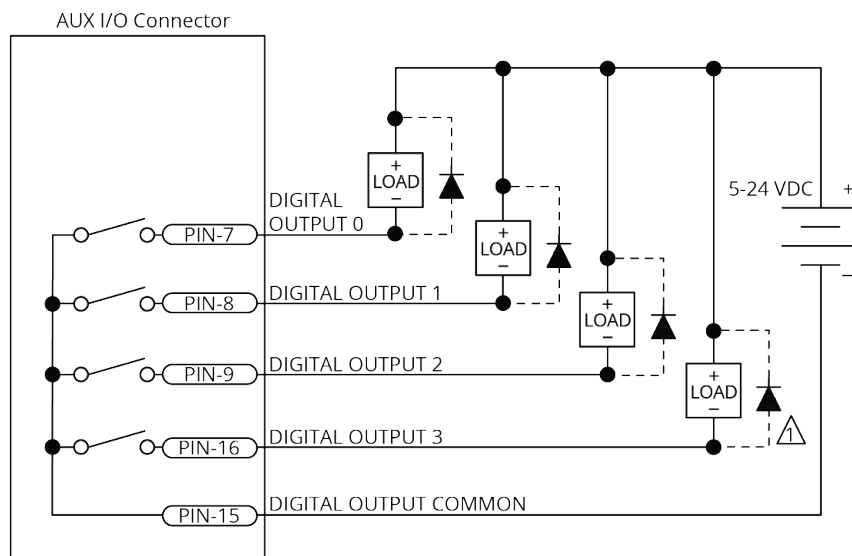
Figure 2-29: Digital Output Schematic (Aux I/O Connector)

Figure 2-30: Digital Outputs Connected in Current Sourcing Mode**Figure 2-31: Digital Outputs Connected in Current Sinking Mode**

2.5.4. Digital Inputs

You can connect the digital inputs to current sourcing or current sinking devices but you must connect all four inputs in the same configuration. Refer to [Figure 2-33](#) and [Figure 2-34](#). The digital inputs are not designed for high-voltage isolation applications. They should only be used with ground-referenced circuits.

Table 2-39: Digital Input Specifications

Input Voltage	Approximate Input Current	Turn On Time	Turn Off Time
+5 V to +24 V	6 mA	10 μ s	43 μ s

Table 2-40: Digital Input Pins on the Auxiliary I/O Connector

Pin#	Description	In/Out/Bi
17	Digital Input 0 / CCW EOT Input ⁽¹⁾	Input
18	Digital Input 1 / CW EOT Input ⁽¹⁾	Input
24	Digital Input Common	Output
25	Digital Input 2 / Home Input ⁽¹⁾	Input
26	Digital Input 3	Input

(1) Software configured option

Figure 2-32: Digital Inputs Schematic (Aux I/O Connector)

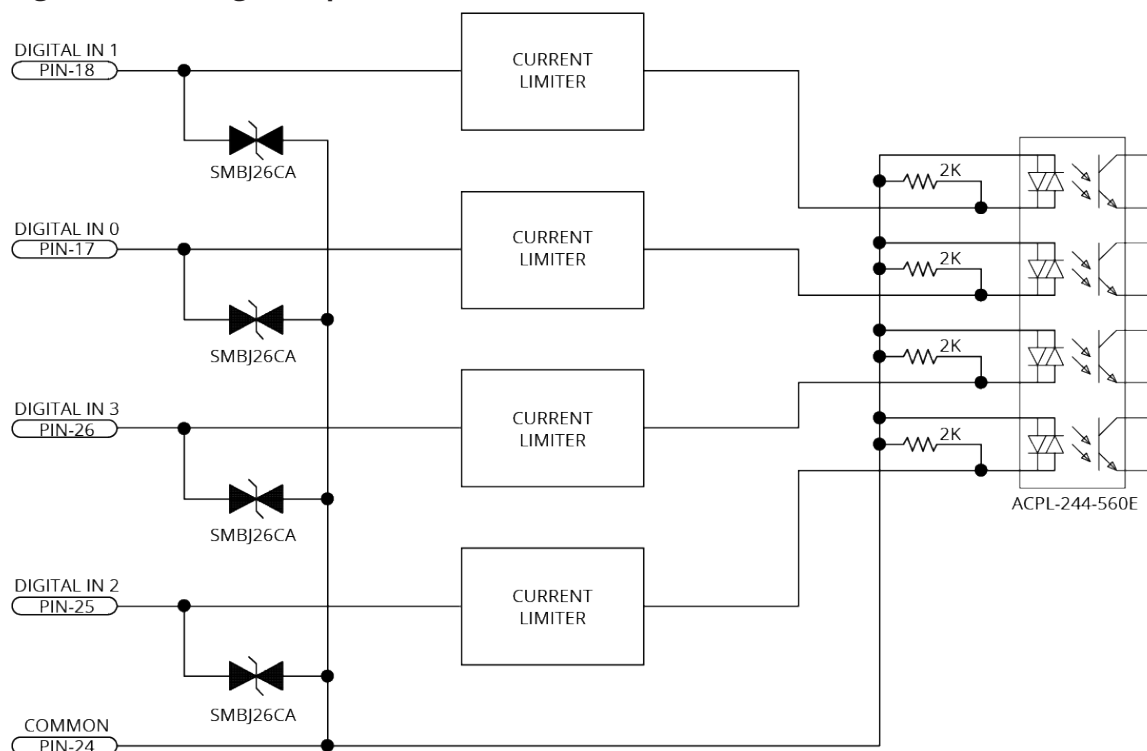
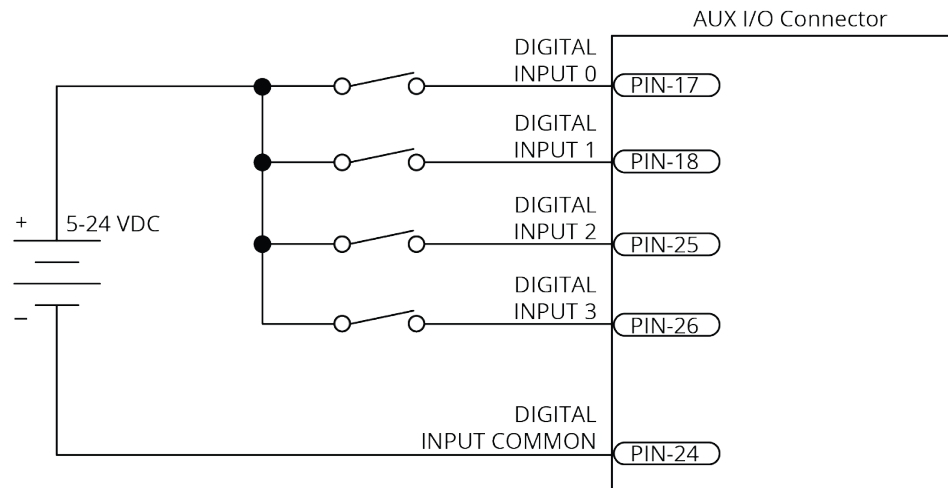
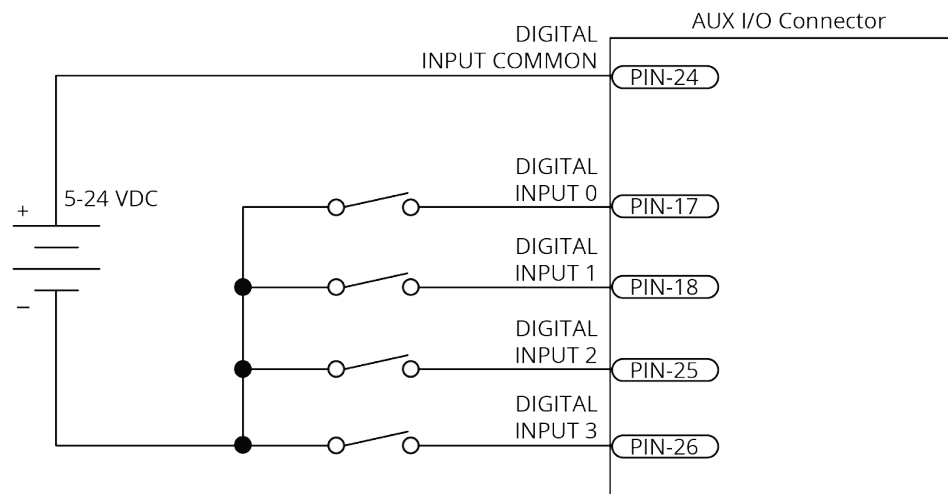


Figure 2-33: Digital Inputs Connected to Current Sourcing Devices**Figure 2-34: Digital Inputs Connected to Current Sinking Devices**

2.5.5. High-Speed Inputs

High-speed inputs 20 and 21 can be used as general purpose inputs or as the trigger signal for high speed data collection. Refer to the `DriveDataCaptureConfigureTrigger()` function topic in the Help file for more information.

You can use the [external PSO synchronization functions](#) to synchronize waveform generation with an external synchronization signal. When you activate this feature, the PSO Waveform module will not generate the configured waveform when an output event is received until the rising edge of the synchronization signal occurs.


Table 2-41: High-Speed Input Specifications

Specification	Value
Input Voltage	5V - 24 V input voltages
Input Current	10 mA
Input Device	HCPL-0630
Delay	50 nsec

Table 2-42: High-Speed Input Pins on the Auxiliary I/O Connector

Pin#	Description	In/Out/Bi
3	High-Speed Input 20 + / PSO External Sync. +	Input
4	High-Speed Input 20 - / PSO External Sync. -	Input
5	High-Speed Input 21 +	Input
6	High-Speed Input 21 -	Input

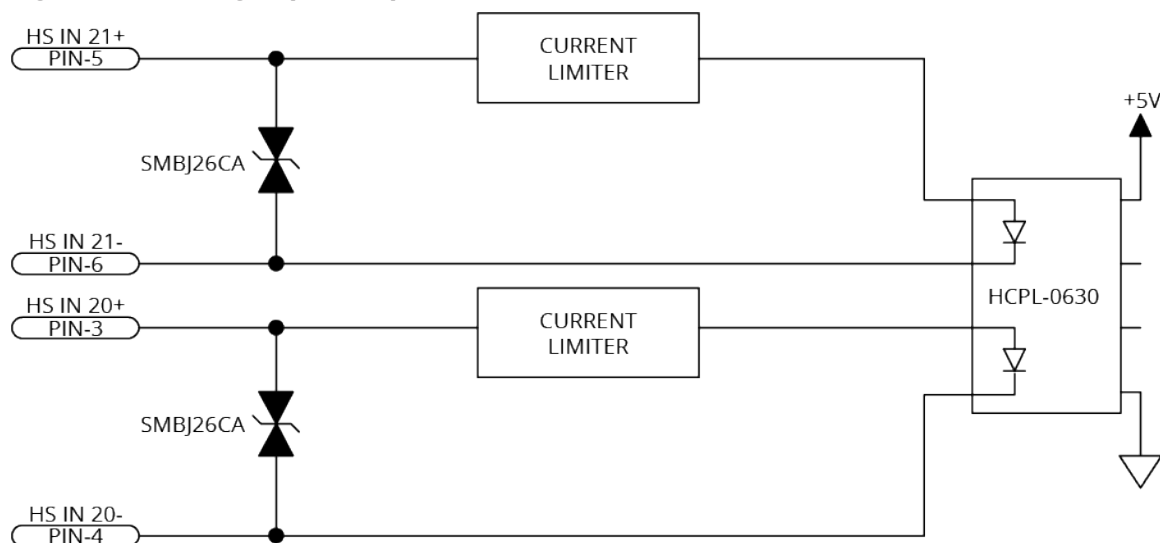Figure 2-35: High-Speed Inputs



2.5.6. Analog Output 0

The analog output can be set from within a program or it can be configured to echo the state of select servo loop nodes.

The analog output is set to zero when you power on the system or reset the drive.


Table 2-43: Analog Output Specifications

Specification	Value
Output Voltage	-10 V to +10 V
Output Current	5 mA
Resolution (bits)	16 bits

Table 2-44: Analog Output Pins on the Auxiliary I/O Connector

Pin#	Description	In/Out/Bi
22	Analog Output 0	Output
23	Analog Common	Output

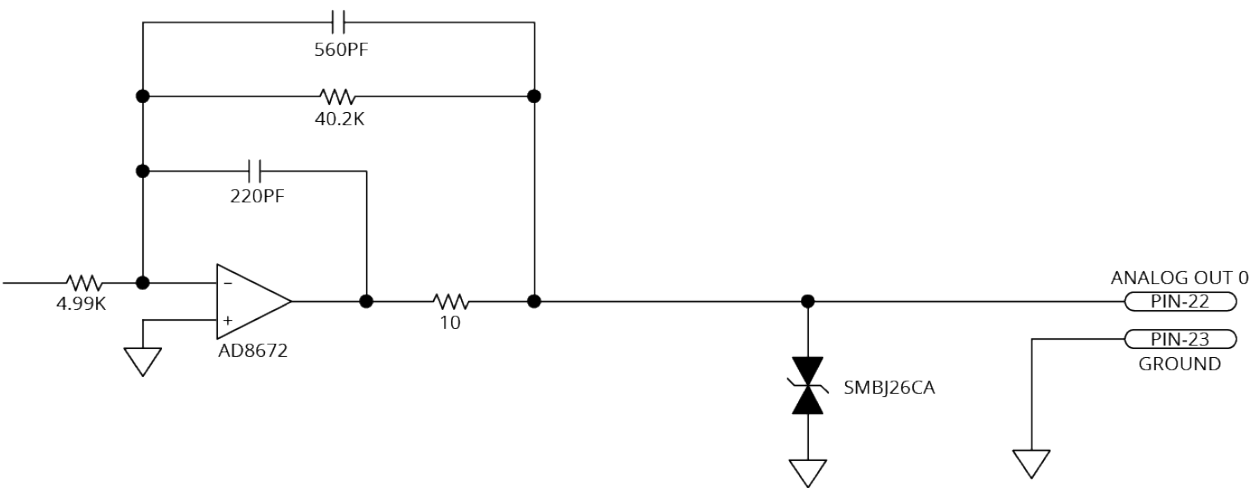Figure 2-36: Analog Output 0 Schematic



2.5.7. Analog Input 0 (Differential)

To interface to a single-ended, non-differential voltage source, connect the signal common of the source to the negative input and connect the analog source signal to the positive input. A floating signal source must be referenced to the analog common. Refer to [Figure 2-37](#).


Table 2-45: Analog Input Specifications

Specification	Value
(AI+) - (AI-)	+10 V to -10 V ⁽¹⁾
Resolution (bits)	16 bits
Input Impedance	1 M Ω
1. Signals outside of this range may damage the input	

Table 2-46: Analog Input Pins on the Auxiliary I/O Connector

Pin#	Description	In/Out/Bi
13	Analog Input 0+ (Differential)	Input
14	Analog Input 0- (Differential)	Input
23	Analog Common	Output

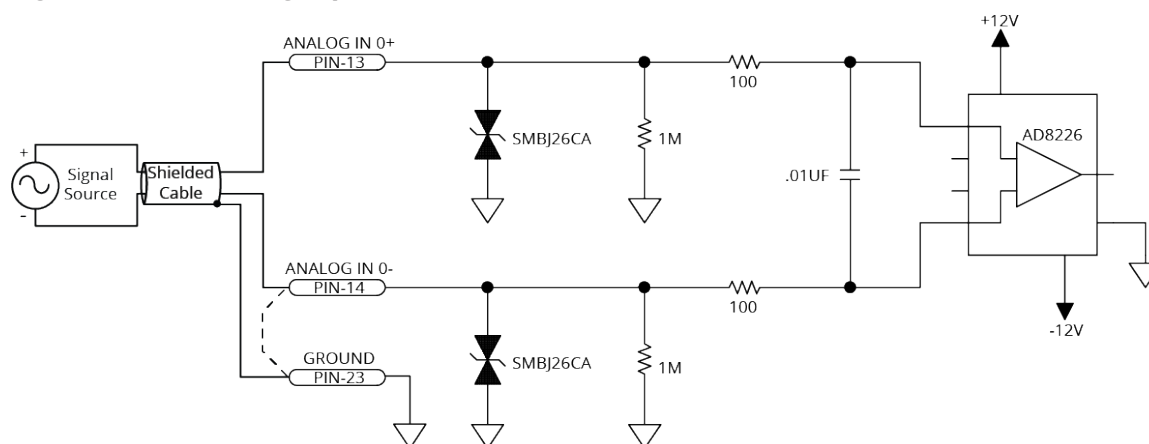Figure 2-37: Analog Input 0 Schematic



2.6. Brake Power Supply Connector

This port is the power supply connection to the on-board brake control circuit. Refer to [Section 2.3.6.](#) for more information about the brake output interface.

Table 2-47: Brake Power Supply Connector Pinout


Pin#	Description	In/Out/Bi	Connector
1	Brake Power Supply (+)	Input	
2	Brake Power Supply (-)	Input	

Table 2-48: Brake Power Supply Mating Connector Ratings

Specification		Description
Type		2-Pin Terminal Block
Part Numbers		Aerotech: ECK02391
		Phoenix: 1827635
Conductor Cross Section	One conductor, stranded with ferrule and plastic sleeve	18...22 AWG (0.25...0.75 mm ²)
	Two conductors (same cross-section), stranded, twin ferrule with plastic sleeve	20 AWG (0.5 mm ²)
Tightening Torque		0.22...0.25 N·m
Conductor Insulation Strip Length		7 mm (0.25 in)
(1) Refer to the manufacturer website for additional information.		

2.7. HyperWire Interface

The HyperWire bus is the high-speed communications connection from the controller. It operates at 2 gigabits per second. The controller sends all command and configuration information through the HyperWire bus.

HyperWire cables can be safely connected to or disconnected from a HyperWire port while the PC and/or drive is powered on. However, any changes to the HyperWire network topology will disrupt communication and you must reset the controller to re-establish communication.



WARNING: Do not connect or disconnect HyperWire cables while you are loading firmware or damage to the drives may occur.

Table 2-49: HyperWire Card Part Number

Part Number	Description
HYPERWIRE-PCIE	HyperWire adapter, PCIe x4 interface

Table 2-50: HyperWire Cable Part Numbers

Part Number	Description
HYPERWIRE-AO10-5	HyperWire cable, active optical, 0.5 m
HYPERWIRE-AO10-10	HyperWire cable, active optical, 1.0 m
HYPERWIRE-AO10-30	HyperWire cable, active optical, 3.0 m
HYPERWIRE-AO10-50	HyperWire cable, active optical, 5.0 m
HYPERWIRE-AO10-200	HyperWire cable, active optical, 20.0 m

2.8. Shunt Options

The BUS LINK connector provides access to the internal DC motor bus supply (DC link) voltage and shunt (brake) resistor connections. The shunt and bus connections do not contain internal fuses. External fuses could be required to meet local electrical safety regulations.

Shunt Resistor:

The shunt resistor is used to dissipate excess energy keeping the internal drive voltage within safe levels. The internal shunt resistor is used by connecting the Internal Shunt terminal to the Shunt Return terminal. An external resistor if used is connected between the External Shunt and Shunt Return terminals. The external and internal shunt connections cannot be used at the same time. The shunt turn on and off voltages are shown in Table 2-53. The drive will turn off if the internal voltage exceeds safe operating levels. The controller parameters ShuntThermalTimeConstant and ShuntNormalizedTemperatureFactor are used to protect the shunt resistor from generating excessive heat. Additional means of protecting an external shunt resistor from overload, such as a thermal shut off switch is recommended.

DC Bus±:

The DC Bus connection may be useful for sharing the motor supply between multiple drives. This increases efficiency in the case where the regenerative energy from one drive can be used by another. Consideration for short circuit faults must be taken into account when using this connection and additional fusing may be required. The number of drives which can be bridged may also be limited due to these factors.

DANGER: Shock and Fire Hazard

Electrical wiring must be designed and installed in accordance with local electrical safety regulations to prevent the risk of fire and electrical shock.

The shunt resistor dissipates a high quantity of power. To prevent the danger of electric shock or fire, you must obey the precautions that follow:



- Correctly size, mount, and protect the external shunt resistor.
- Protect the wiring to the internal shunt resistor terminals.
- Do not touch the shunt resistor terminals. There are lethal voltages on the terminals.
- Do not touch the surface of the drive or the external shunt resistor. The temperature can exceed 70°C.
- Restrict access to the shunt resistor while it is connected to a power source.
- Wait 10 minutes after you disconnect power before you access the BUS LINK connector.
- Make sure that the voltage between the DC Bus + and DC Bus - terminals is less than 50 V before you access it.

Table 2-51: Bus Link Connector Pinout

Pin	Description
DC Bus +	Positive motor supply internal voltage (DC link +)
DC Bus -	Negative motor supply internal voltage (DC link -)
External Shunt	Connect an external shunt resistor between this terminal and the Shunt Return terminal
Internal Shunt	Connect this terminal to the Shunt Return terminal to use the internal shunt resistor
Shunt Return	Return connection for the internal or external shunt resistor

Table 2-52: Bus Link Mating Connector Ratings

Specification		Description
Type		5-Pin Terminal Block
Part Numbers		Aerotech: ECK02494
		Phoenix: 1784088
Conductor Cross Section	One conductor, stranded with ferrule and plastic sleeve	8...14 AWG (2.5..4 mm ²)
	Two conductors (same cross-section), stranded , twin ferrule with plastic sleeve	14 AWG (2.5 mm ²)
Tightening Torque		0.3...0.7 N·m
Conductor Insulation Strip Length		10 mm (3/8 in)
(1) Refer to the manufacturer website for additional information.		

Table 2-53: Internal Shunt Specifications

Option	Description	Part Numbers Vishay/Dale [Aerotech]	Turn-On Range (VDC)	Turn-Off Range (VDC)
-240	50 Ω (min), 300 W; 4800 μ F Effective Bus Capacitance	RBEF030050R00KFBVT [ECR01039]	380 - 395	360 - 370
-480	125 Ω (min), 300 W; 1500 μ F Effective Bus Capacitance	RBEF0300125R0KFBV [ECR01045]	865 - 880	815 - 830

Table 2-54: Maximum Recommended Shunt Current

Peak Current Option	Value
-10	10 A
-20	10 A
-30	10 A
-50	20 A
-100	20 A

Equation 1:

Calculate the kinetic energy of the system. Any energy that is not lost to the system could be regenerated to the DC bus.

$$E_M = [1/2] [J_M + J_L] \omega_M^2 \quad ; \text{ rotary motors}$$

$$E_M = [1/2] [M_M + M_L] v_M^2 \quad ; \text{ linear motors}$$

Where:

$$J_M = \text{rotor inertia (kg} \cdot \text{m}^2\text{)}$$

$$J_L = \text{load inertia (kg} \cdot \text{m}^2\text{)}$$

$$\omega_M = \text{motor speed before deceleration (rad/s)}$$

$$M_M = \text{forcer mass (kg)}$$

$$M_L = \text{load mass (kg)}$$

$$v_M = \text{velocity (m/s)}$$

Equation 2:

You will need a shunt resistor if the regenerated energy is greater than the Maximum Additional Storage Energy that the internal bus capacitor can store ([Table 2-55](#)).

$$E_{Ca} = (1/2) \cdot C \cdot (V_M^2 - V_{NOM}^2)$$

Where:

$$C = \text{bus capacitor (F) [4,800 } \mu\text{F or 1500 } \mu\text{F]}$$

$$V_M = \text{turn on voltage for shunt circuit (V) [380 V or 865 V]}$$

$$V_{NOM} = \text{nominal bus voltage (V) [320 V or 680 V, Typical]}$$

Table 2-55: Maximum Additional Storage Energy for a Standard iXC6e/XC6e

Bus Voltage	Maximum Additional Energy
320 V	100.8 J
680 V	214 J

If a shunt resistor is required, calculate the value of resistance necessary to dissipate the energy.

Equations 3, 4, and 5:

Calculate the parameters of the shunt resistor.

Equation 3:

$$P_{PEAK} = (E_M - E_{Ca}) / t_D$$

Where:

$$P_{PEAK} = \text{peak power the regeneration circuit must accommodate (W)}$$

$$t_D = \text{deceleration time (s)}$$

Equation 4:

$$P_{AV} = (E_M - E_{Ca}) / t_{CYCLE}$$

Where:

P_{AV} = average power dissipated on shunt resistor (W)

t_{CYCLE} = time between deceleration events (s)

Equation 5:

$$R = (2V_M - V_{HYS})^2 / 4P_{PEAK}$$

Where:

V_{HYS} = hysteresis voltage of regeneration circuit (V) [20 V or 40 V, Typical (refer to [Table 2-53](#))]

Additional useful equations:

$$1 \text{ lb}\cdot\text{ft} = 1.356 \text{ N}\cdot\text{m}$$

$$1 \text{ rad/s} = 9.55 \text{ rpm}$$

2.9. Sync Port

The Sync port is a bi-directional high speed proprietary interface that lets you transmit encoder signals between drives. This is typically used for multi-axis PSO applications where one or two drives send their encoder signals to a main drive that has the PSO logic and PSO output signal. The drive contains two Sync ports, labeled A and B.

To avoid signal contention, all Sync ports default to the input state during reset and immediately after power is applied to the drive.

Table 2-56: Sync-Related Functions

Function	Description
DriveEncoderOutputConfigureDivider(), DriveEncoderOutputConfigureInput(), DriveEncoderOutputOn(), DriveEncoderOutputOff()	Configure each Sync port as an input or an output
PsoDistanceConfigureInputs()	Let the PSO to track the SYNC A or SYNC B port.
PsoWindowConfigureInput()	

The Sync port uses low-voltage differential signaling (LVDS) and standard USB 3.0 type A (cross over) cables.

Table 2-57: Sync Port Cables

Part Number	Description
CBL-SYNC-3	Length 3 dm; Connectors: USB Type A to USB Type A
CBL-SYNC-5	Length 5 dm; Connectors: USB Type A to USB Type A
CBL-SYNC-7	Length 7 dm; Connectors: USB Type A to USB Type A
CBL-SYNC-10	Length 10 dm; Connectors: USB Type A to USB Type A

2.10. Industrial Ethernet (iXC6e Only)

The controller is equipped with 100BASE-TX Industrial Ethernet ports.



IMPORTANT: Industrial Ethernet is only available on the iXC6e.

- For the location of the ports, refer to [Figure 1-1](#).
- For cable part numbers, refer to [Table 4-1](#).
- For more information, refer to the Help system.

2.11. System Interconnection

Figure 2-38: Drive-Based System Wiring Drawing (Best Practice)

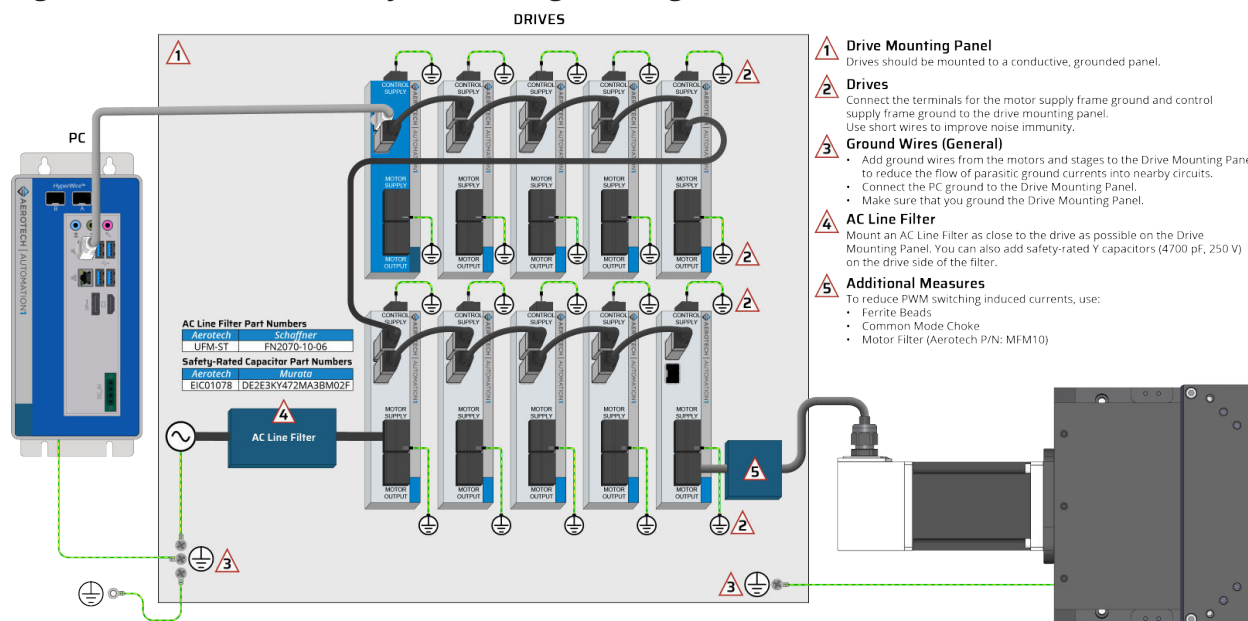


Figure 2-39: PC-Based System Wiring Drawing (Best Practice)

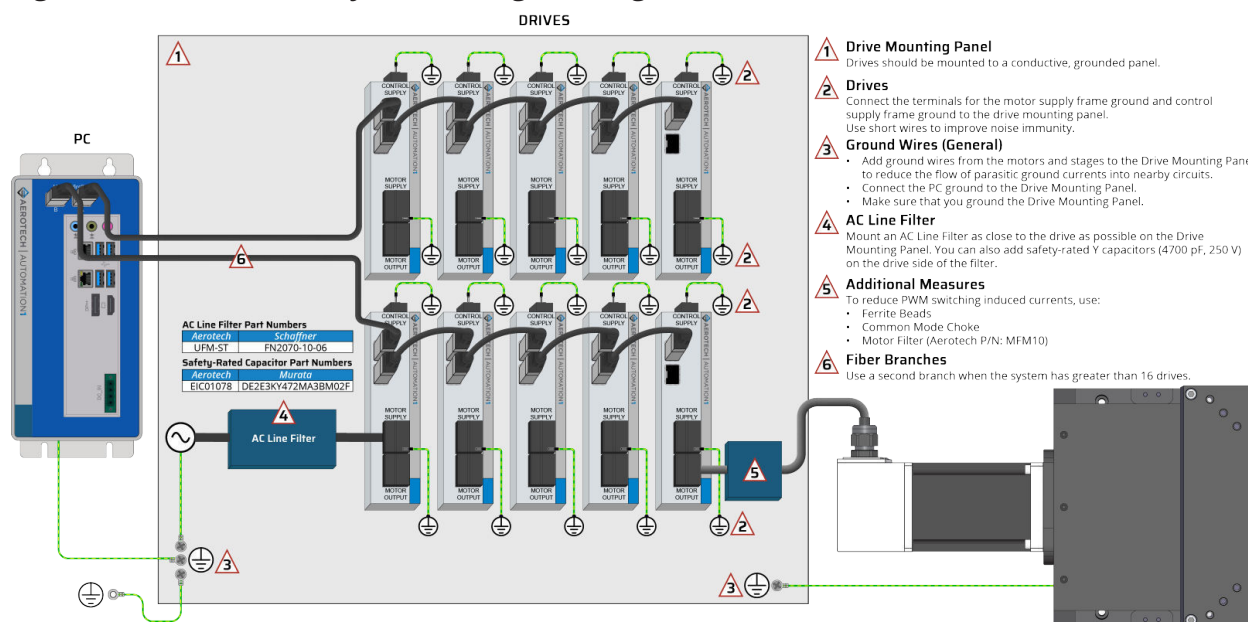


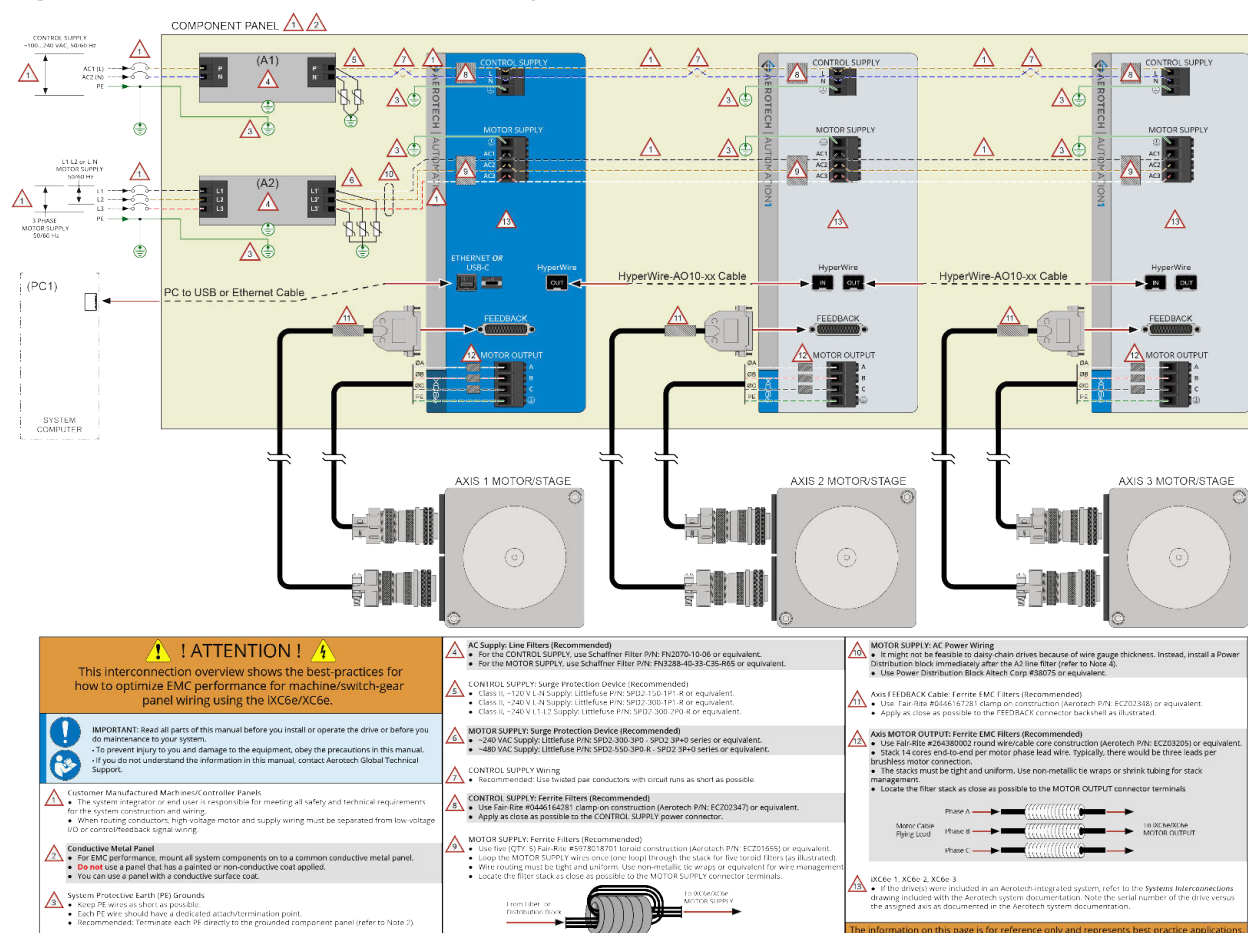
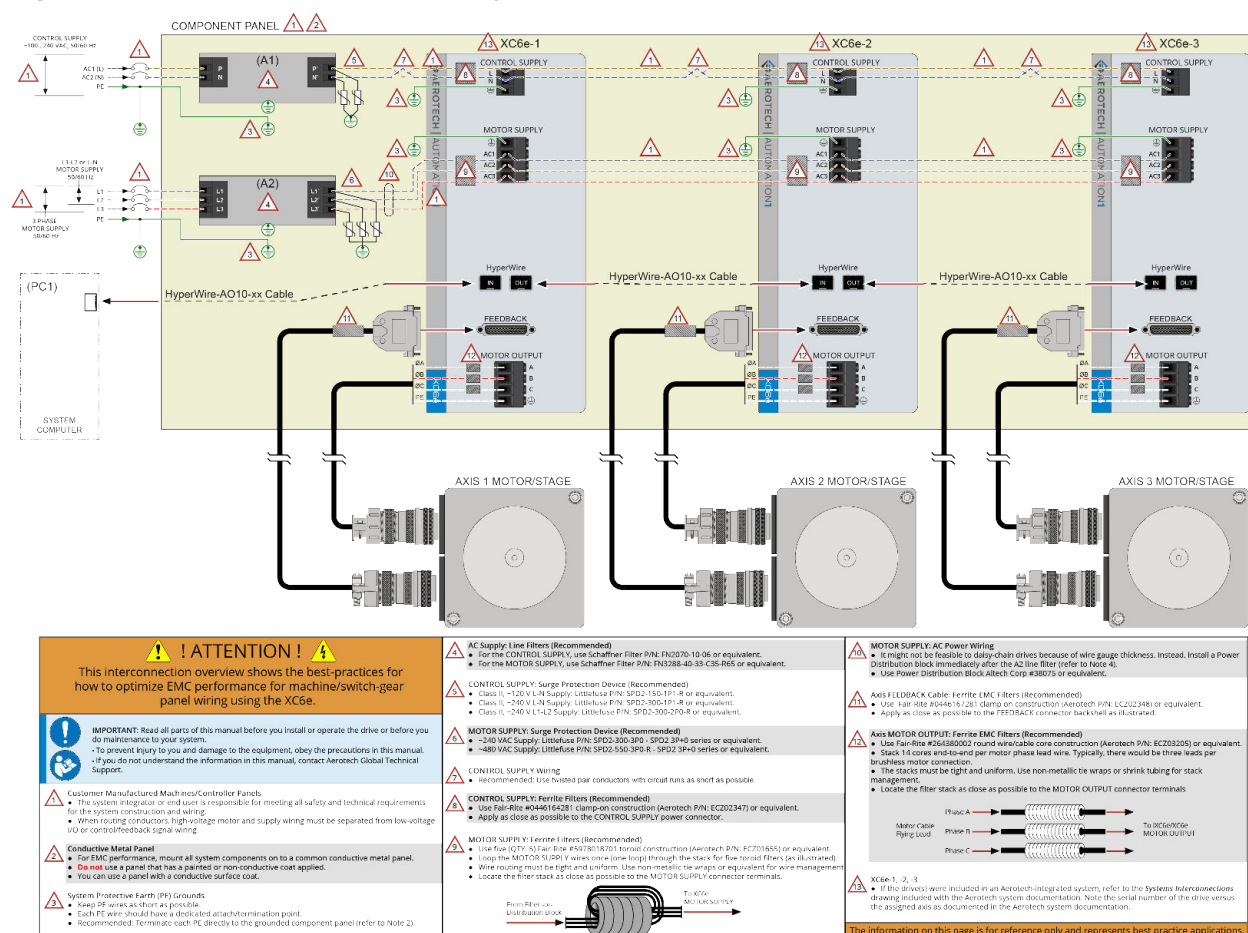
Figure 2-40: Drive-Based Controller System Interconnection (Best Practice)

Figure 2-41: PC-Based Controller System Interconnection (Best Practice)


2.12. PC Configuration and Operation Information

For more information about hardware requirements, PC configuration, programming, system operation, and utilities, refer to the [Help file](#).

Chapter 3: -EB1 Option Expansion Board

The -EB1 I/O option board has 16 digital inputs, 16 digital outputs, 3 analog inputs, 3 analog outputs, and PSO outputs.

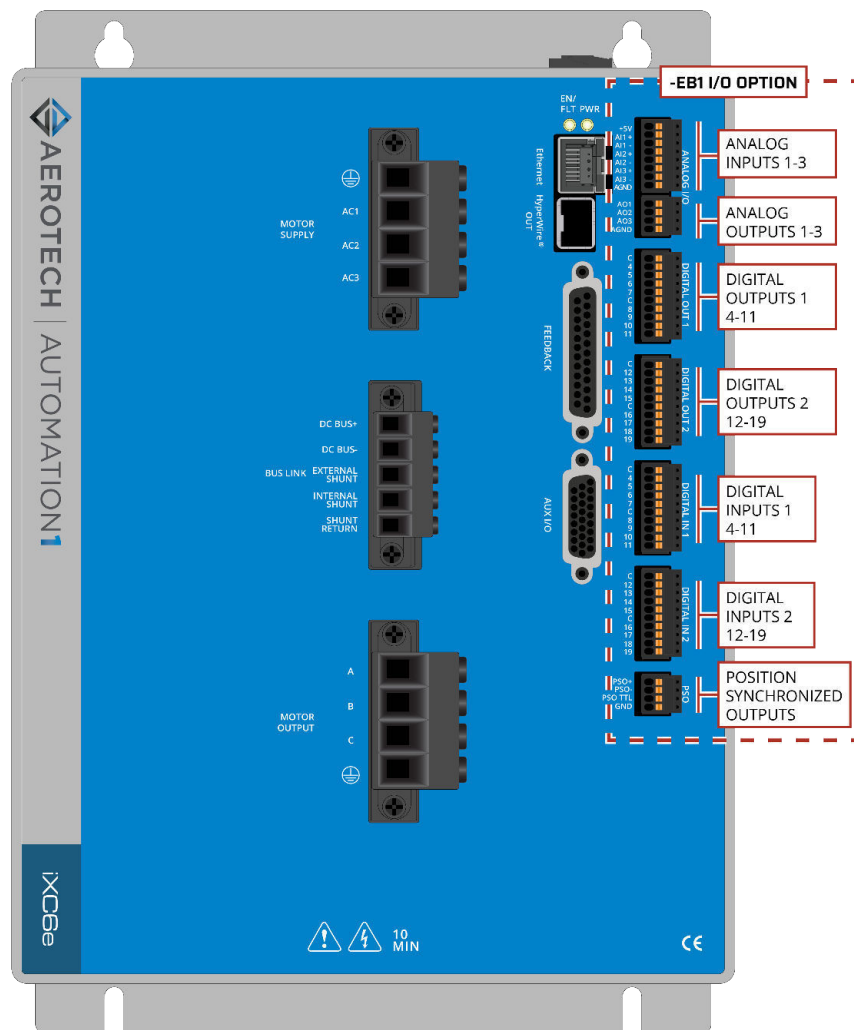Figure 3-1: -EB1 I/O Option Board Connectors (iXC6e shown)



3.1. Digital Outputs [-EB1]

Optically-isolated solid-state relays drive the digital outputs. You can connect the digital outputs in current sourcing or current sinking mode but you must connect all four outputs in a port in the same configuration. Refer to [Figure 3-3](#) and [Figure 3-4](#).

The digital outputs are not designed for high-voltage isolation applications and they should only be used with ground-referenced circuits.

You must install suppression diodes on digital outputs that drive relays or other inductive devices. To see an example of a current sourcing output that has diode suppression, refer to [Figure 3-3](#). To see an example of a current sinking output that has diode suppression, refer to [Figure 3-4](#).

The digital outputs have overload protection. They will resume normal operation when the overload is removed.

Table 3-1: Digital Output Specifications [-EB1]

Digital Output Specifications	Value
Maximum Voltage	24 V (26 V Maximum)
Maximum Sink/Source Current	250 mA/output
Output Saturation Voltage	0.9 V at maximum current
Output Resistance	3.7 Ω
Rise / Fall Time	250 μ s (2K pull up to 24V)
Reset State	Output Off (High Impedance State)

Table 3-2: Digital Output 1 Connector Pinout [-EB1]

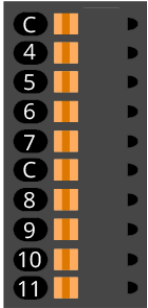
Pin#	Description	In/Out/Bi	Connector
1	Output Common for Outputs 4-7	Output	
2	Output 4 (Optically-Isolated)	Output	
3	Output 5 (Optically-Isolated)	Output	
4	Output 6 (Optically-Isolated)	Output	
5	Output 7 (Optically-Isolated)	Output	
6	Output Common for Outputs 8-11	Output	
7	Output 8 (Optically-Isolated)	Output	
8	Output 9 (Optically-Isolated)	Output	
9	Output 10 (Optically-Isolated)	Output	
10	Output 11 (Optically-Isolated)	Output	

Table 3-3: Digital Output 2 Connector Pinout [-EB1]

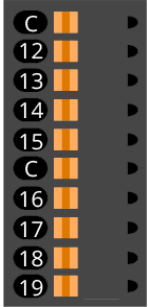
Pin#	Description	In/Out/Bi	Connector
1	Output Common for Outputs 12-15	Output	
2	Output 12 (Optically-Isolated)	Output	
3	Output 13 (Optically-Isolated)	Output	
4	Output 14 (Optically-Isolated)	Output	
5	Output 15 (Optically-Isolated)	Output	
6	Output Common for Outputs 16-19	Output	
7	Output 16 (Optically-Isolated)	Output	
8	Output 17 (Optically-Isolated)	Output	
9	Output 18 (Optically-Isolated)	Output	
10	Output 19 (Optically-Isolated)	Output	

Table 3-4: Digital Output 1 and 2 Mating Connector Ratings [-EB1]

Specification		Description
Type		10-Pin Terminal Block
Part Numbers		Aerotech: ECK02395
		Phoenix: 1700841
Conductor Cross Section	Solid or stranded	20...26 AWG (0.14...0.5 mm ²)
	Stranded, with ferrule, without plastic sleeve	20...24 AWG (0.25...0.5 mm ²)
Conductor Insulation Strip Length		8 mm (5/16 in)
(1) Refer to the manufacturer website for additional information.		


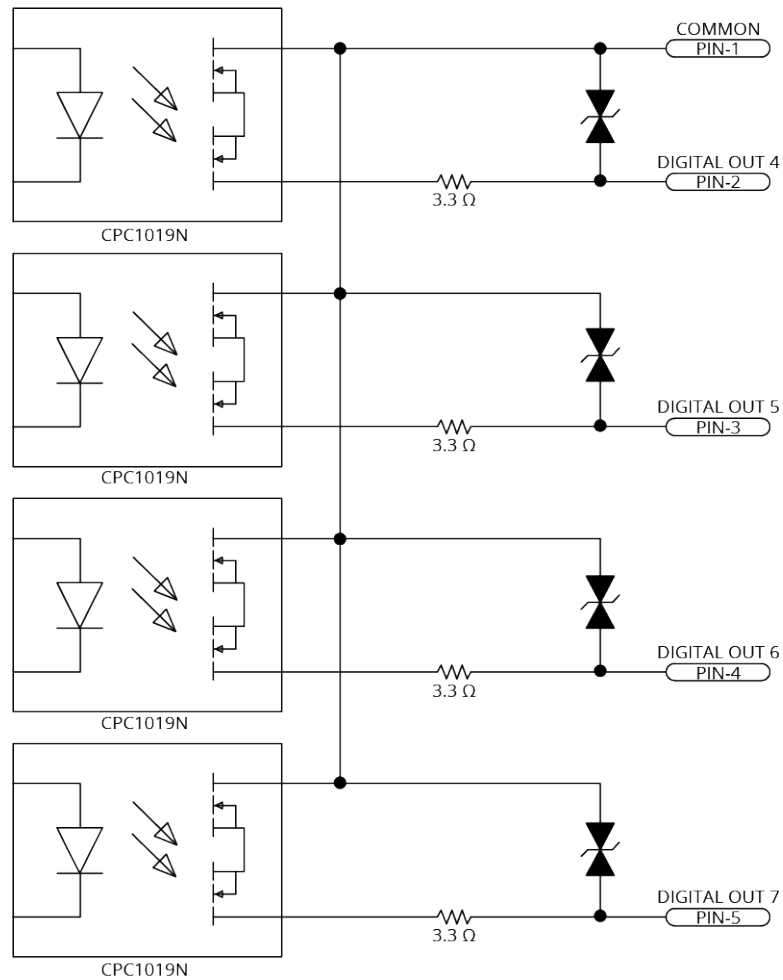
Figure 3-2: Digital Outputs Schematic [-EB1]

Figure 3-3: Digital Outputs Connected in Current Sourcing Mode [-EB1]

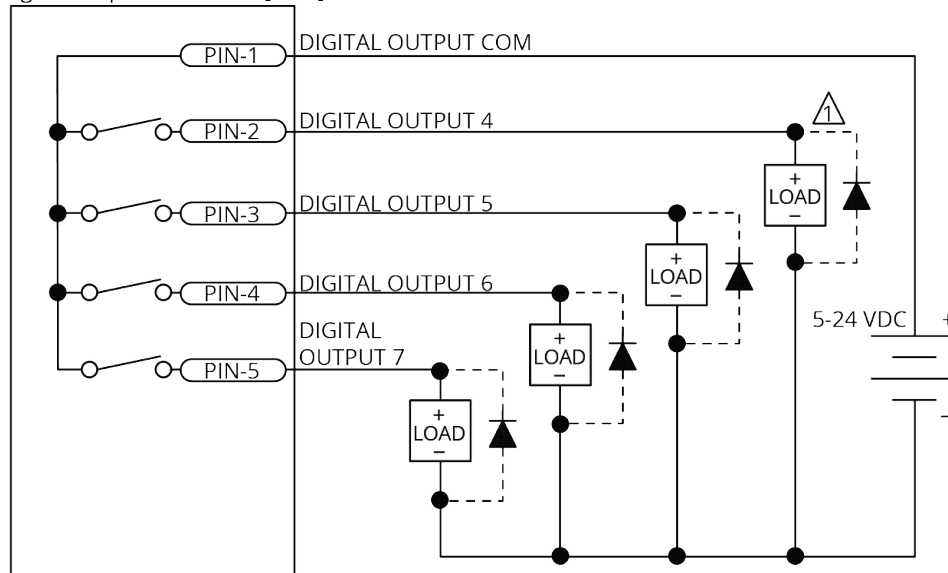
Digital Output Connector [-EB1]



1 DIODE REQUIRED ON EACH OUTPUT THAT DRIVES AN INDUCTIVE DEVICE (COIL), SUCH AS A RELAY.

Figure 3-4: Digital Outputs Connected in Current Sinking Mode [-EB1]

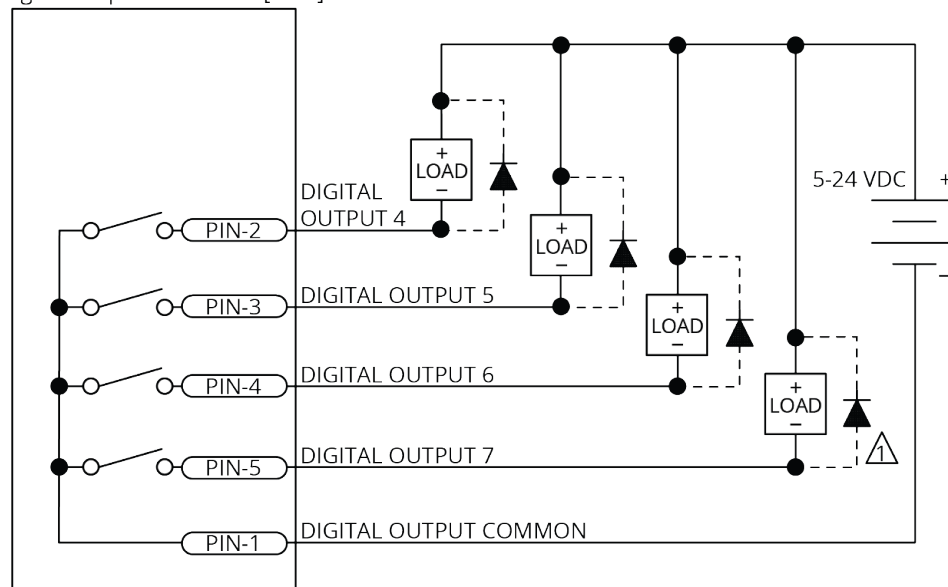Digital Output Connector [-EB1]



1 DIODE REQUIRED ON EACH OUTPUT THAT DRIVES AN INDUCTIVE DEVICE (COIL), SUCH AS A RELAY.

3.2. Digital Inputs [-EB1]

Input bits are arranged in groups of 4 and each group shares a common pin. This lets a group be connected to current sourcing or current sinking devices, based on the connection of the common pin in that group.

To be able to connect an input group to current sourcing devices, connect the input group's common pin to the power supply return (-). Refer to [Figure 3-6](#).

To be able to connect an input group to current sinking devices, connect the input group's common pin to the power supply source (+). Refer to [Figure 3-7](#).

The digital inputs are not designed for high-voltage isolation applications. They should only be used with ground-referenced circuits.

Table 3-5: Digital Input Specifications [-EB1]

Input Voltage	Approximate Input Current	Turn On Time	Turn Off Time
+5 V to +24 V	6 mA	10 μ s	43 μ s

Table 3-6: Digital Input 1 Connector Pinout [-EB1]

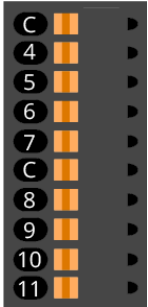
Pin#	Description	In/Out/Bi	Connector
1	Input Common for Inputs 4-7	Output	
2	Input 4 (Optically-Isolated)	Input	
3	Input 5 (Optically-Isolated)	Input	
4	Input 6 (Optically-Isolated)	Input	
5	Input 7 (Optically-Isolated)	Input	
6	Input Common for Inputs 8-11	Output	
7	Input 8 (Optically-Isolated)	Input	
8	Input 9 (Optically-Isolated)	Input	
9	Input 10 (Optically-Isolated)	Input	
10	Input 11 (Optically-Isolated)	Input	

Table 3-7: Digital Input 2 Connector Pinout [-EB1]


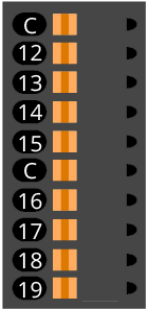
Pin#	Description	In/Out/Bi	Connector
1	Input Common for Inputs 12-15	Output	
2	Input 12 (Optically-Isolated)	Input	
3	Input 13 (Optically-Isolated)	Input	
4	Input 14 (Optically-Isolated)	Input	
5	Input 15 (Optically-Isolated)	Input	
6	Input Common for Inputs 16-19	Output	
7	Input 16 (Optically-Isolated)	Input	
8	Input 17 (Optically-Isolated)	Input	
9	Input 18 (Optically-Isolated)	Input	
10	Input 19 (Optically-Isolated)	Input	

Table 3-8: Digital Input 1 and 2 Mating Connector Ratings [-EB1]

Specification		Description
Type		10-Pin Terminal Block
Part Numbers		Aerotech: ECK02395
		Phoenix: 1700841
Conductor Cross Section	Solid or stranded	20...26 AWG (0.14...0.5 mm ²)
	Stranded, with ferrule, without plastic sleeve	20...24 AWG (0.25...0.5 mm ²)
Conductor Insulation Strip Length		8 mm (5/16 in)
(1) Refer to the manufacturer website for additional information.		

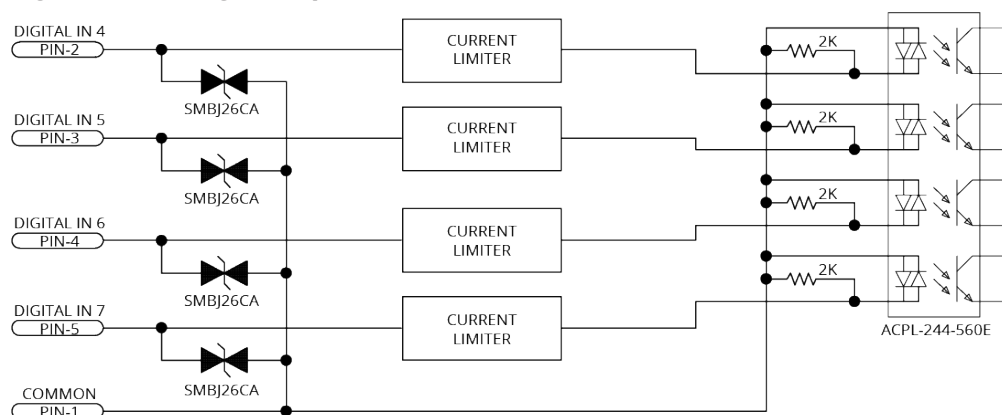Figure 3-5: Digital Inputs Schematic [-EB1]



IMPORTANT: Each bank of four inputs must be connected in an all sourcing or all sinking configuration.

Figure 3-6: Digital Inputs Connected to Current Sourcing (PNP) Devices [-EB1]


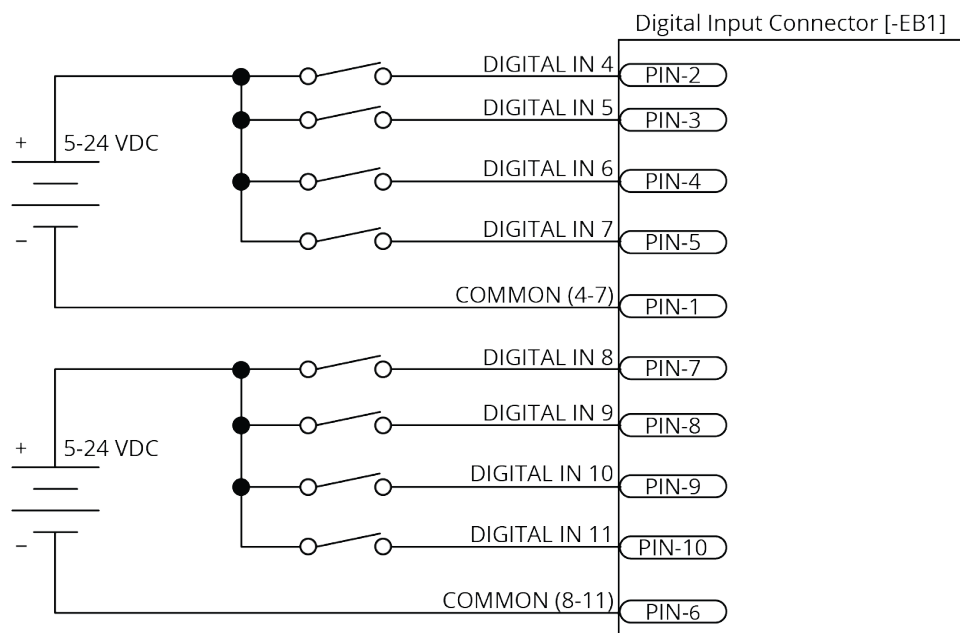


Figure 3-7: Digital Inputs Connected to Current Sinking (NPN) Devices [-EB1]

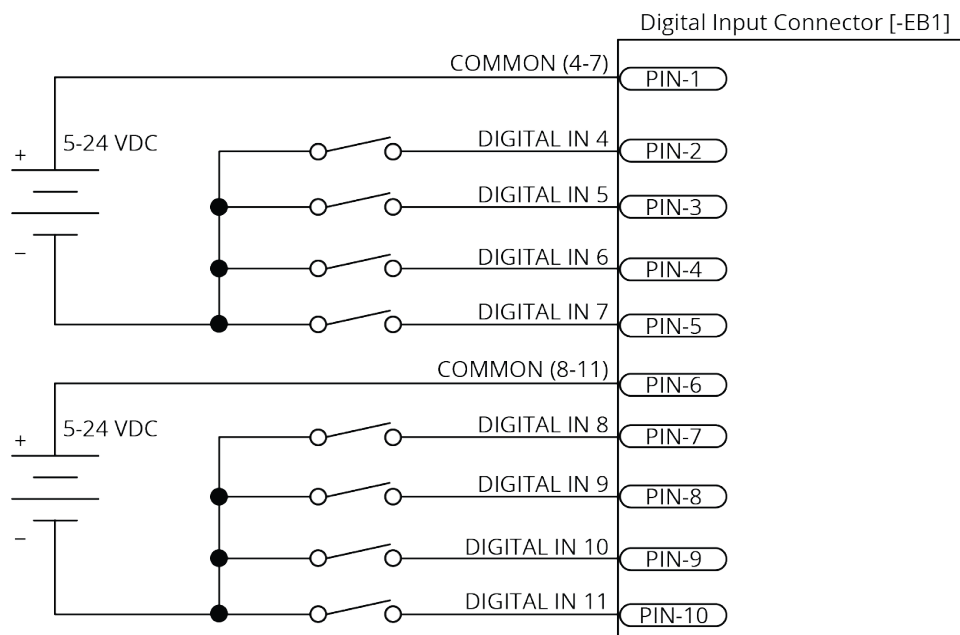

3.3. Analog Outputs [-EB1]

The analog outputs can be set from within a program or they can be configured to echo the state of select servo loop nodes.

The analog outputs are set to zero when you power on the system or reset the drive.

Table 3-9: Analog Output Specifications [-EB1]

Specification	Value
Output Voltage	-10 V to +10 V
Output Current	5 mA
Resolution (bits)	16 bits

Table 3-10: Analog Output Connector Pinout [-EB1]


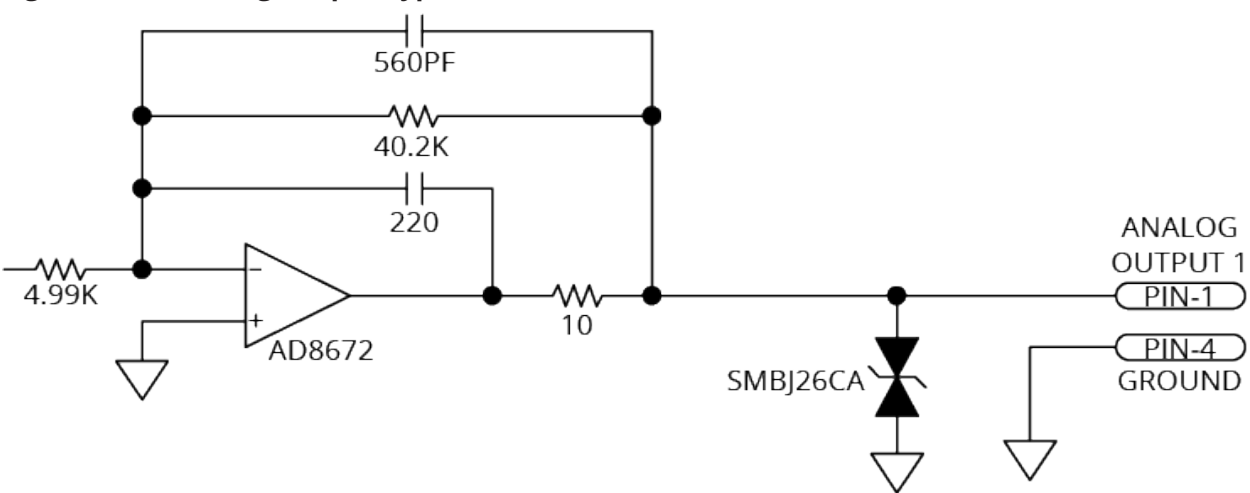
Pin #	Description	In/Out/Bi	Connector
1	Analog Output 1	Output	
2	Analog Output 2	Output	
3	Analog Output 3	Output	
4	Ground	N/A	

Table 3-11: Analog Output Mating Connector Ratings [-EB1]

Specification		Description
Type		4-Pin Terminal Block
Part Numbers		Aerotech: ECK02399
		Phoenix: 1768004
Conductor Cross Section	Solid or stranded	20...26 AWG (0.14...0.5 mm ²)
	Stranded, with ferrule, without plastic sleeve	20...24 AWG (0.25...0.5 mm ²)
Conductor Insulation Strip Length		8 mm (5/16 in)
(1) Refer to the manufacturer website for additional information.		

Figure 3-8: Analog Output Typical Connection [-EB1]



3.4. Analog Inputs [-EB1]

To interface to a single-ended, non-differential voltage source, connect the signal common of the source to the negative input and connect the analog source signal to the positive input. A floating signal source must be referenced to the analog common. Refer to [Figure 3-9](#).

Table 3-12: Differential Analog Input Specifications [-EB1]

Specification	Value
(AI+) - (AI-)	+10 V to -10 V ⁽¹⁾
Resolution (bits)	16 bits
Input Impedance	1 MΩ
1. Signals outside of this range may damage the input	

Table 3-13: Analog Input Connector Pinout [-EB1]


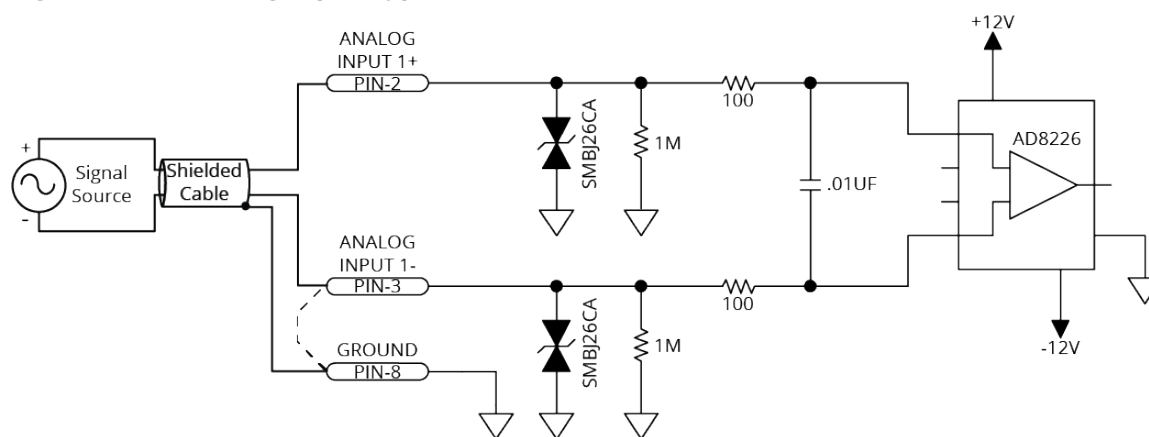
Pin#	Description	In/Out/Bi	Connector
1	+5V (250 mA max)	Output	
2	Analog Input 1+	Input	
3	Analog Input 1-	Input	
4	Analog Input 2+	Input	
5	Analog Input 2-	Input	
6	Analog Input 3+	Input	
7	Analog Input 3-	Input	
8	Ground	N/A	

Table 3-14: Analog Input Mating Connector Ratings [-EB1]

Specification	Description
Type	8-Pin Terminal Block
Part Numbers	Aerotech: ECK02397
	Phoenix: 1908101
Conductor Cross Section	Solid or stranded
	Stranded, with ferrule, without plastic sleeve
20...26 AWG (0.14...0.5 mm ²)	
20...24 AWG (0.25...0.5 mm ²)	
Conductor Insulation Strip Length	8 mm (5/16 in)
(1) Refer to the manufacturer website for additional information.	

Figure 3-9: Analog Input Typical Connection [-EB1]



3.5. PSO Interface [-EB1]

The Position Synchronized Output (PSO) signal is available on the -EB1 option board in two signal formats: TTL and Isolated.

Table 3-15: PSO Specifications [-EB1]

Specification		Value
Output	TTL	5 V, 16 mA (max)
	Isolated	5-24 V, 250 mA
Maximum PSO Output (Fire) Frequency	TTL	12.5 MHz
	Isolated	5 MHz
Output Latency [Fire event to output change]	TTL	5 ns
	Isolated	150 ns

Table 3-16: PSO Interface Connector Pinout [-EB1]


Pin #	Description	In/Out/Bi	Connector
1	PSO Output+	Output	
2	PSO Output-	Output	
3	PSO Output (TTL)	Output	
4	Ground	N/A	

Table 3-17: PSO Interface Mating Connector Ratings [-EB1]

Specification		Description
Type		4-Pin Terminal Block
Part Numbers		Aerotech: ECK02399
		Phoenix: 1768004
Conductor Cross Section	Solid or stranded	20...26 AWG (0.14...0.5 mm ²)
	Stranded, with ferrule, without plastic sleeve	20...24 AWG (0.25...0.5 mm ²)
Conductor Insulation Strip Length		8 mm (5/16 in)
(1) Refer to the manufacturer website for additional information.		

Isolated Signals

This output signal is a fully-isolated 5-24V compatible output capable of sourcing or sinking current. This output is normally open and only conducts current when a PSO fire event occurs.

The PSO Isolated Outputs are overload protected and will turn off if the maximum output current is exceeded.

Figure 3-10: PSO Output Sources Current


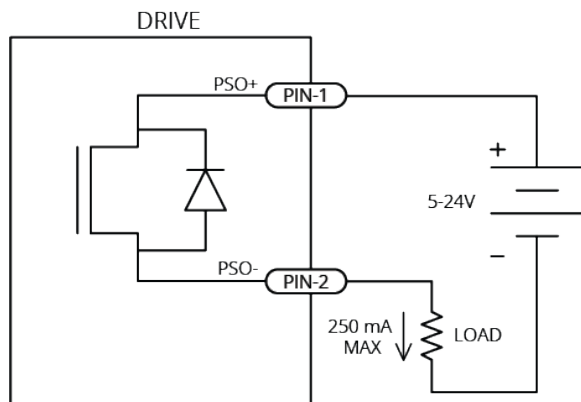



Figure 3-11: PSO Output Sinks Current

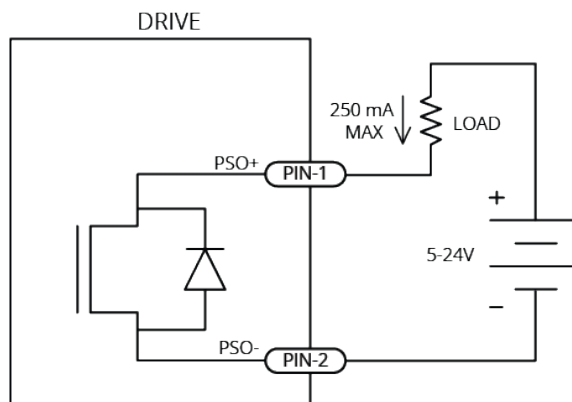

TTL Signals

This output signal is a 5V TTL signal which is used to drive an opto coupler or general purpose TTL input. This signal is active high and is driven to 5V when a PSO fire event occurs.

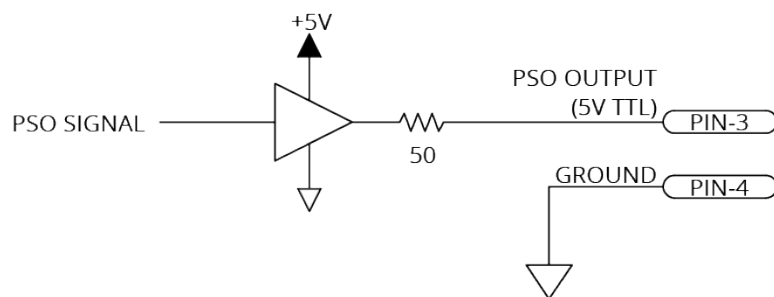Figure 3-12: PSO TTL Outputs Schematic



Chapter 4: Cables and Accessories



IMPORTANT: Find Aerotech cable drawings on the website at <http://www.aerotechmotioncontrol.com/manuals/index.aspx>.

Table 4-1: Standard Interconnection Cables

Cable Part #	Description
Joystick	Refer to Section 4.1 .
ECZ01231	BBA32 Interconnect Cable
ENET-CAT5e-xx ^(1, 2)	Ethernet CAT5e Cable
USB-AMCM-xx ^(1, 2)	USB Cable A-Male to C-Male
(1) The "-xx" indicates length in decimeters.	
(2) iXC6e Only	

4.1. Joystick Interface

Aerotech Multi-Axis Joystick (NEMA12 (IP54) rated) is powered from 5 V and has a nominal 2.5 V output in the center detent position. Three buttons are used to select axis pairs and speed ranges. Joystick control will not activate unless the joystick is in the center location. Third party devices can be used provided they produce a symmetric output voltage within the range of -10 V to +10 V.

Connecting joystick with an Aerotech cable, all Aerotech cables are labeled to identify the connector and connections. The joystick parameters must be set to match the analog and digital I/O connections. Refer to the [Help file](#) for programming information about how to change joystick parameters.

Figure 4-1: Two Axis Joystick Interface (to the Aux I/O of two drives)


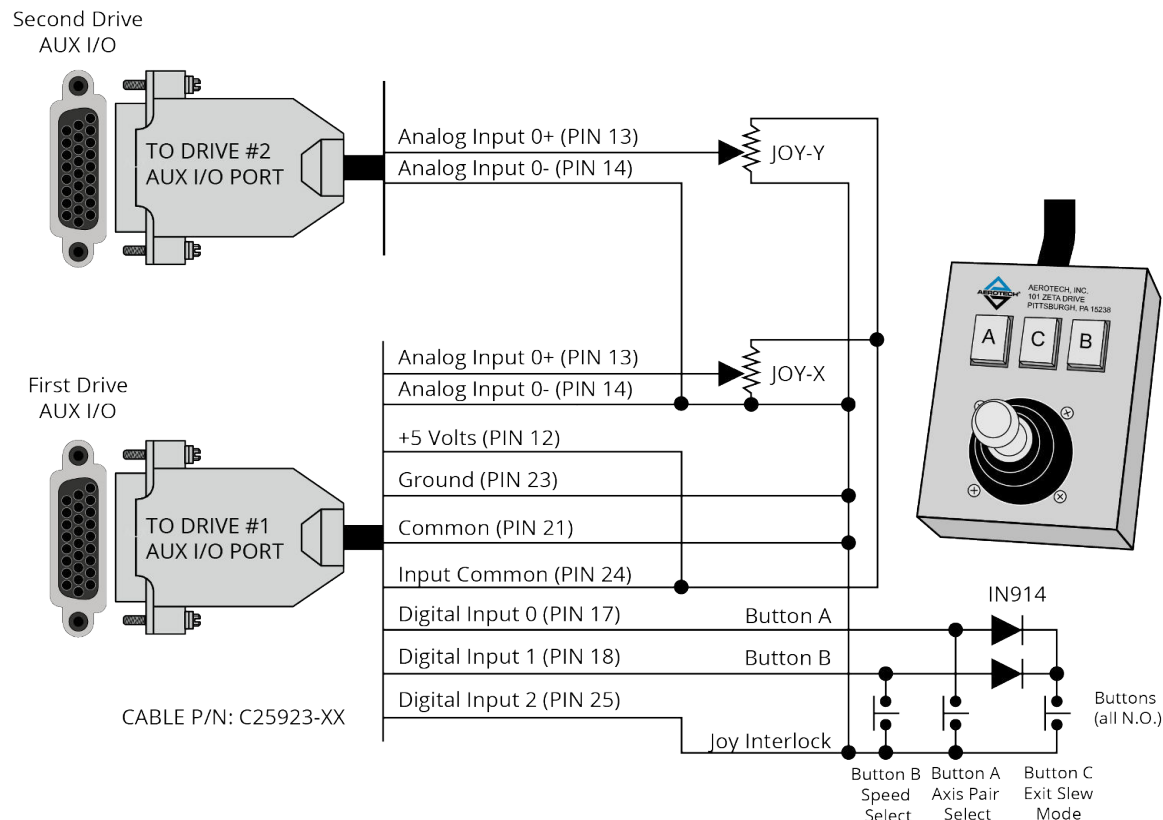


Figure 4-2: Two Axis Joystick Interface (to the I/O board)

4.2. Handwheel Interface

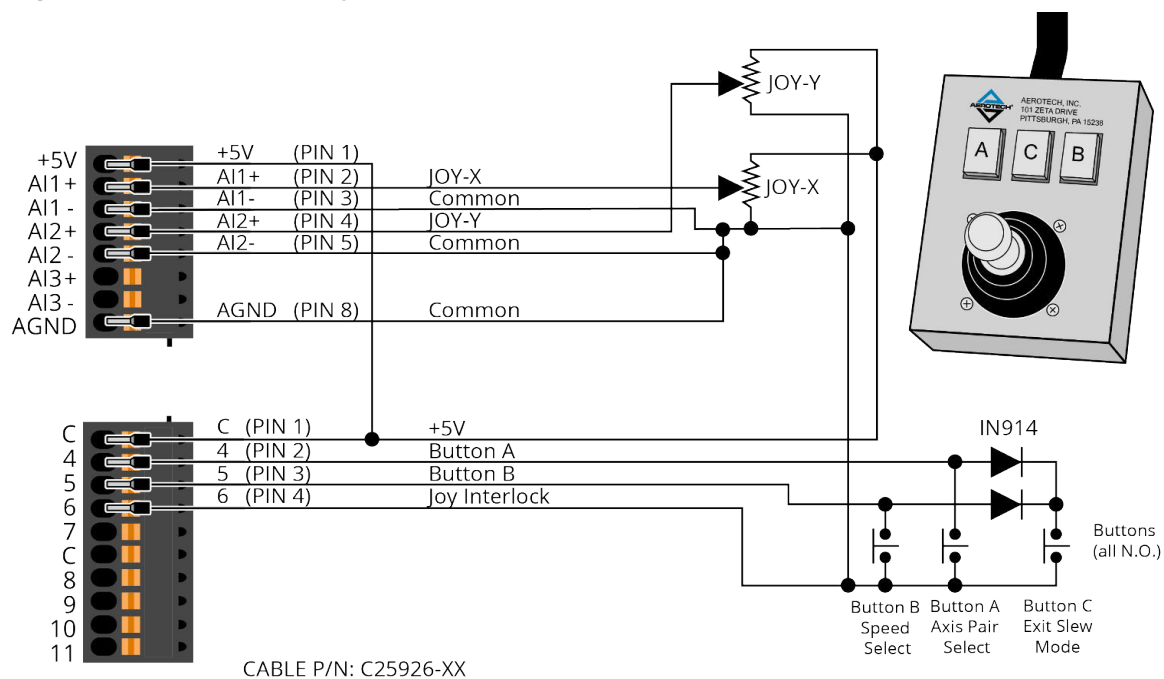A handwheel can be used to manually control axis position. The handwheel must provide 5V differential quadrature signals to the drive.



IMPORTANT: You can find instructions on how to enable the handwheel in the online [Help file](#).

Connect a handwheel to the Aux I/O as shown in [Figure 4-3](#) or [Figure 4-4](#).

Figure 4-3: Handwheel Interconnection to Aux I/O Connector


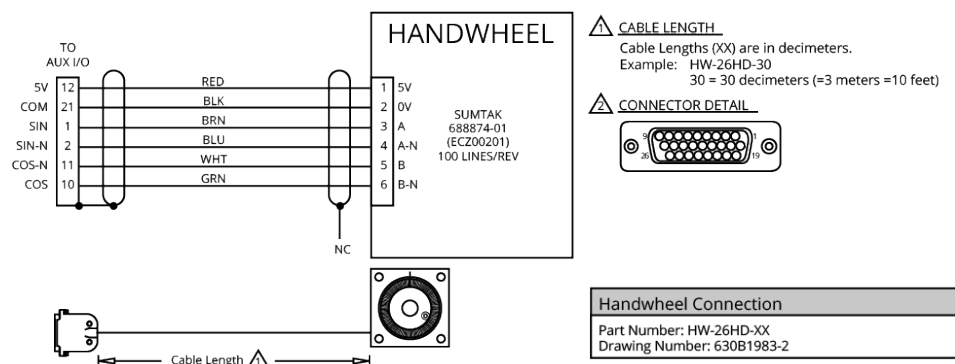


Figure 4-4: Handwheel Interconnection to the Aux I/O through a BBA32 Module

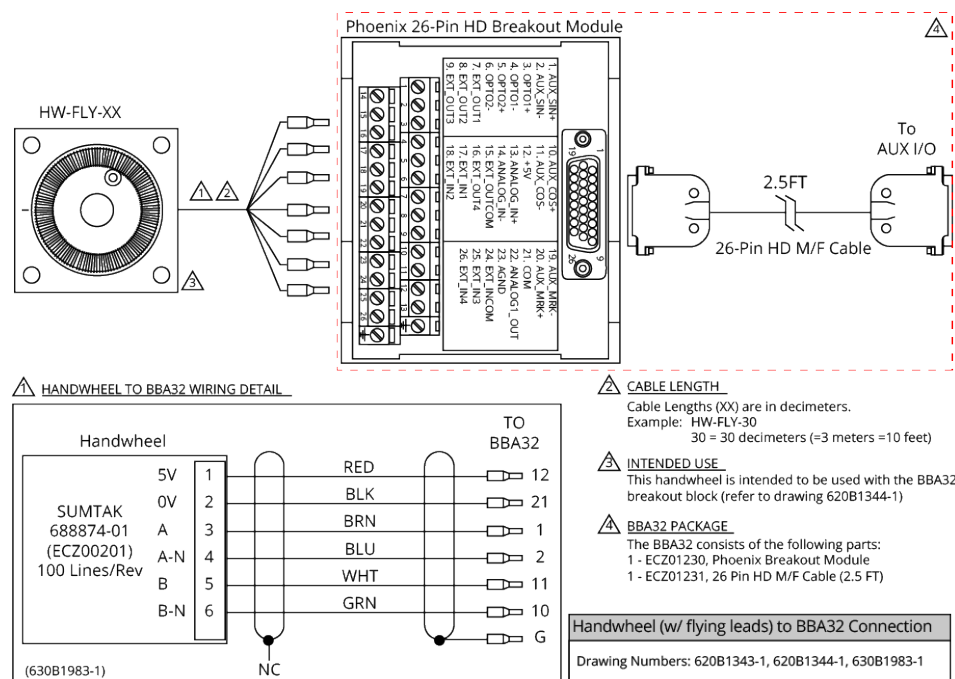

Chapter 5: Maintenance



IMPORTANT: For your own safety and for the safety of the equipment:

- Do not remove the cover of the iXC6e/XC6e.
- Do not attempt to access the internal components.

A fuse that needs to be replaced indicates that there is a more serious problem with the system or setup. Contact Global Technical Support for assistance.



DANGER: If you must remove the covers and access any internal components be aware of the risk of electric shock.

1. Disconnect the Mains power connection.
2. Wait at least ten (10) minutes after removing the power supply before doing maintenance or an inspection. Otherwise, there is the danger of electric shock.
3. All tests must be done by an approved service technician. Voltages inside the controller and at the input and output power connections can kill you.

Table 5-1: LED Description

LED	Color	Description
PWR	GREEN	The light will illuminate and remain illuminated while power is applied.
EN/FLT	GREEN	The axis is Enabled.
	RED	The axis is in a Fault Condition.
	GREEN/RED (alternates)	The axis is Enabled in a Fault Condition. or The light is configured to blink for setup.

Table 5-2: Troubleshooting

Symptom	Possible Cause and Solution
No Communication	Make sure the power LED is illuminated (this indicates that power is present).
	Make sure that all communication cables (HyperWire, for example) are fully inserted in their ports.

5.1. Preventative Maintenance

Do an inspection of the iXC6e/XC6e and the external wiring one time each month. It might be necessary to do more frequent inspections based on:

- The operating conditions of the system.
- How you use the system.

Table 5-3: Preventative Maintenance

Check	Action to be Taken
Examine the chassis for hardware and parts that are damaged or loose. It is not necessary to do an internal inspection unless you think internal damage occurred.	Repair all damaged parts.
Do an inspection of the cooling vents.	Remove all material that collected in the vents.
Examine the work area to make sure there are no fluids and no electrically conductive materials.	Do not let fluids and electrically conductive material go into the chassis.
Examine all cables and connections to make sure they are correct.	Make sure that all connections are correctly attached and not loose. Replace cables that are worn. Replace all broken connectors.

Cleaning



DANGER: Before you clean the iXC6e/XC6e, disconnect the electrical power from the drive.

Use a clean, dry, soft cloth to clean the iXC6e/XC6e. If necessary, use a cloth that is moist with water or isopropyl alcohol. If you use a moist cloth, make sure that moisture does not go into the drive. Also make sure that it does not go onto the outer connectors and components. Internal contamination from the cleaning solution can cause corrosion and electrical short circuits.

Do not clean the labels with a cleaning solution because it might remove the label information.

5.2. Fuse Specifications



WARNING: Replace fuses only with the same type and value.

Table 5-4: Control Board Fuse Specifications

Fuse	Description	Size	SCCR ¹	Aerotech P/N	Third Party P/N
F100	Control Power at Line Input (L)	2 A S.B.	35 A	EIF01044	Littelfuse 0877002.MXEP

(1) Short circuit current rating

Appendix A: Warranty and Field Service

Aerotech, Inc. warrants its products to be free from harmful defects caused by faulty materials or poor workmanship for a minimum period of one year from date of shipment from Aerotech. Aerotech's liability is limited to replacing, repairing or issuing credit, at its option, for any products that are returned by the original purchaser during the warranty period. Aerotech makes no warranty that its products are fit for the use or purpose to which they may be put by the buyer, whether or not such use or purpose has been disclosed to Aerotech in specifications or drawings previously or subsequently provided, or whether or not Aerotech's products are specifically designed and/or manufactured for buyer's use or purpose. Aerotech's liability on any claim for loss or damage arising out of the sale, resale, or use of any of its products shall in no event exceed the selling price of the unit.

THE EXPRESS WARRANTY SET FORTH HEREIN IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, BY OPERATION OF LAW OR OTHERWISE. IN NO EVENT SHALL AEROTECH BE LIABLE FOR CONSEQUENTIAL OR SPECIAL DAMAGES.

Return Products Procedure

Claims for shipment damage (evident or concealed) must be filed with the carrier by the buyer. Aerotech must be notified within thirty (30) days of shipment of incorrect material. No product may be returned, whether in warranty or out of warranty, without first obtaining approval from Aerotech. No credit will be given nor repairs made for products returned without such approval. A "Return Materials Authorization (RMA)" number must accompany any returned product(s). The RMA number may be obtained by calling an Aerotech service center or by submitting the appropriate request available on our website (www.aerotech.com). Products must be returned, prepaid, to an Aerotech service center (no C.O.D. or Collect Freight accepted). The status of any product returned later than thirty (30) days after the issuance of a return authorization number will be subject to review.

Visit [Global Technical Support Portal](#) for the location of your nearest Aerotech Service center.

Returned Product Warranty Determination

After Aerotech's examination, warranty or out-of-warranty status will be determined. If upon Aerotech's examination a warranted defect exists, then the product(s) will be repaired at no charge and shipped, prepaid, back to the buyer. If the buyer desires an expedited method of return, the product(s) will be shipped collect. Warranty repairs do not extend the original warranty period.

Fixed Fee Repairs - Products having fixed-fee pricing will require a valid purchase order or credit card particulars before any service work can begin.

All Other Repairs - After Aerotech's evaluation, the buyer shall be notified of the repair cost. At such time the buyer must issue a valid purchase order to cover the cost of the repair and freight, or authorize the product(s) to be shipped back as is, at the buyer's expense. Failure to obtain a purchase order number or approval within thirty (30) days of notification will result in the product(s) being returned as is, at the buyer's expense.

Repair work is warranted for ninety (90) days from date of shipment. Replacement components are warranted for one year from date of shipment.

Rush Service

At times, the buyer may desire to expedite a repair. Regardless of warranty or out-of-warranty status, the buyer must issue a valid purchase order to cover the added rush service cost. Rush service is subject to Aerotech's approval.

On-site Warranty Repair

If an Aerotech product cannot be made functional by telephone assistance or by sending and having the customer install replacement parts, and cannot be returned to the Aerotech service center for repair, and if Aerotech determines the problem could be warranty-related, then the following policy applies:

Aerotech will provide an on-site Field Service Representative in a reasonable amount of time, provided that the customer issues a valid purchase order to Aerotech covering all transportation and subsistence costs. For warranty field repairs, the customer will not be charged for the cost of labor and material. If service is rendered at times other than normal work periods, then special rates apply.

If during the on-site repair it is determined the problem is not warranty related, then the terms and conditions stated in the following "On-Site Non-Warranty Repair" section apply.

On-site Non-Warranty Repair

If any Aerotech product cannot be made functional by telephone assistance or purchased replacement parts, and cannot be returned to the Aerotech service center for repair, then the following field service policy applies:

Aerotech will provide an on-site Field Service Representative in a reasonable amount of time, provided that the customer issues a valid purchase order to Aerotech covering all transportation and subsistence costs and the prevailing labor cost, including travel time, necessary to complete the repair.

Service Locations

<http://www.aerotech.com/contact-sales.aspx?mapState=showMap>

USA, CANADA, MEXICO

Aerotech, Inc.
Global Headquarters

CHINA

Aerotech China
Full-Service Subsidiary

GERMANY

Aerotech Germany
Full-Service Subsidiary

TAIWAN

Aerotech Taiwan
Full-Service Subsidiary

UNITED KINGDOM

Aerotech United Kingdom
Full-Service Subsidiary

Appendix B: Revision History

Revision	Description
1.05	<ul style="list-style-type: none">Removed Agency Approvals sectionsAdded PSO Differential Output information in Auxiliary I/O ConnectorAdded Section 2.1.4.Updated input current and fuse specifications
1.03	Added support for Industrial Ethernet (internal release)
1.02	Added support for iXC6e (internal release)
1.01	The following sections have been updated: <ul style="list-style-type: none">EU Declaration of ConformityAgency Approvals
1.00	New manual

This page intentionally left blank.

Index

-EB1

Analog Inputs	92
Analog Outputs	91
Digital Inputs	88
Digital Outputs	84
I/O Option Board	83
Position Synchronized Output (PSO) Interface	93
-MX2	40
-MX3	40,60

2

2006/42/EC	9
2011/65/EU	9
2014/30/EU	9
2014/35/EU	9

A

Absolute Encoder (Auxiliary I/O Connector)	59
Absolute Encoder (Feedback Connector)	39
Absolute Encoder Schematic (Auxiliary I/O Connector)	59
Absolute Encoder Schematic (Feedback Connector)	39
AC line filter	26
Altitude	24
Ambient Temperature	24
Analog Encoder (Aux Connector)	60
Analog Encoder (Auxiliary I/O Connector)	40
Analog Encoder Phasing Reference Diagram	60
Analog Encoder Schematic (Auxiliary I/O Connector)	61
Analog Encoder Specifications (Auxiliary I/O Connector)	60
Analog Encoder Specifications (Feedback Connector)	40
Analog Input 0 on the Aux I/O Connector	71
Analog Input 0 Schematic (Aux I/O Connector)	71
Analog Input 0 Specifications (Aux I/O Connector)	71
Analog Input Connector [-EB1] Mating Connector Part Numbers	92
Analog Input Connector Pinout [-EB1]	92
Analog Input Pins (Aux I/O Connector)	71
Analog Input Typical Connection [-EB1]	92
Analog Inputs [-EB1]	92
Analog Output 0 on the Aux I/O Connector	70

Analog Output 0 Schematic (Aux I/O Connector)	70
Analog Output 0 Specifications (Aux I/O Connector)	70
Analog Output Connector [-EB1] Mating Connector Part Numbers	91
Analog Output Connector Pinout [-EB1]	91
Analog Output Pins (Aux I/O Connector)	70
Analog Output Specifications [-EB1]	91
Analog Output Typical Connection [-EB1]	91
Analog Outputs [-EB1]	91
Aux Connector	
Analog Encoder	60
Sine Wave Encoder	60
Aux I/O Connector	
Analog Input 0	71
Analog Output 0	70
Auxiliary Encoder Interface	57
Digital Inputs	67
Digital Outputs	64
High-Speed User Inputs	69
Position Synchronized Output	62
PSO	62
Aux I/O Connector Mating Connector Part Numbers	56
Auxiliary Encoder (Aux I/O Connector)	57
Auxiliary I/O Connector	56
Absolute Encoder	59
Analog Encoder	40
RS-422 Line Driver Encoder	58
Sine Wave Encoder	40
Square Wave Encoder	58
Auxiliary I/O Connector Pinout	56
Auxiliary I/O Pins (Aux I/O Connector)	57

B

BiSS absolute encoder	39,59
Brake Connected to the Feedback Connector	49
Brake Control Relay Specifications	49
Brake Output Connector Pinout	72
Brake Output Pins on the Feedback Connector	49
Brake Outputs (Feedback Connector)	49
Brake Power Supply Connector	72
Brake Power Supply Connector Mating Connector Part Numbers	72
Brushless Motor Configuration (Motor Power Output Connector)	33

[illegible]

Motor Output Current Frequency	19	Encoder Fault Input	45
Motor Supply SCCR	19	End of Travel Limit Input	46
Motor Type	19	Hall-Effect Inputs	43
Power Amplifier Bandwidth	19	Home Limit Input	46
Protective Features	19	Pinout	36
PWM Switching Frequency	19	Primary Encoder	37
User Power Supply Output	19	RS-422 Line Driver Encoder	38
Electromagnetic Compatibility (EMC)	9	Square Wave Encoder	38
EMC/CE Compliance	28	Thermistor Input	44
Enclosure		Travel Limit Input	46
IP54 Compliant	21	Feedback Monitoring	34
encoder		Figure	
absolute	39,59	-EB1 I/O Option Board Connectors	83
Encoder (Feedback Connector)	37	Absolute Encoder Schematic (Auxiliary I/O Connector)	59
Encoder and Hall Signal Diagnostics	34	Absolute Encoder Schematic (Feedback Connector)	39
Encoder Fault Input (Feedback Connector)	45	Analog Encoder Schematic (Auxiliary I/O Connector)	61
Encoder Fault Input Pin on the Feedback Connector	45	Analog Input 0 Schematic (Aux I/O Connector)	71
Encoder Phasing	42	Analog Input Typical Connection [-EB1]	92
Encoder Phasing Reference Diagram	42	Analog Output 0 Schematic (Aux I/O Connector)	70
Encoder Pins on the Feedback Connector	37	Analog Output Typical Connection [-EB1]	91
End of Travel Limit Input (Feedback Connector)	46	Brake Connected to the Feedback Connector	49
End of Travel Limit Input Connections	47	Brushless Motor Configuration (Motor Power Output Connector)	33
End of Travel Limit Input Diagnostic Display	48	Control Supply Connections	25
End of Travel Limit Input Pins on the Feedback Connector	46	Digital Inputs Connected to a Current Sinking Device [-EB1]	90
End of Travel Limit Phasing	48	Digital Inputs Connected to a Current Sourcing Device [-EB1]	90
EnDat absolute encoder	39,59	Digital Inputs Connected to Current Sinking Devices (Aux I/O Connector)	68
Environmental Specifications	24	Digital Inputs Connected to Current Sourcing Devices (Aux I/O Connector)	68
EU 2015/863	9	Digital Output Schematic (Aux I/O Connector)	65
examining parts		Digital Outputs Connected in Current Sinking Mode (Aux I/O Connector)	66
cables	100	Digital Outputs Connected in Current Sourcing Mode (Aux I/O Connector)	66
connections	100	Digital Outputs Schematic [-EB1]	86
examining, dangerous fluids	100	Dimensions (without -EB1)	22
examining, dangerous material	100	Dimensions with -EB1	23
External Shunt Connector		End of Travel Limit Input Connections	47
Pinout	74	End of Travel Limit Input Diagnostic Display	48
External Shunt Connector		Hall-Effect Inputs Schematic	43
Mating Connector Part Numbers	75	High-Speed Inputs	69
		Home Limit Input Connections	47
		Home Limit Input Diagnostic Display	48
F			
Feature Summary	17		
Feedback Connector	36		
Absolute Encoder	39		
Brake Outputs	49		
Encoder	37		

Isolated Output Current Sinks Schematic (PSO)	94	HyperWire	73
Isolated Output Current Sources Schematic (PSO)	94	Cable Part Numbers	73
Motor Supply Connections	26	Card Part Number	73
Outputs Connected in Current Sinking Mode [-IO]	87		
Outputs Connected in Current Sourcing Mode [-EB1]	87	I	
Positive Motor Direction	34	I/O Option Board [-EB1]	83
PSO Isolated Output Sinks Current	94	Input Power Connections	25
PSO Isolated Output Sources Current	94	inspecting cooling vents	100
PSO TTL Outputs Schematic	94	Inspection	100
Sine Wave Encoder Schematic (Auxiliary I/O Connector)	61	Installation and Configuration	25
Square Wave Encoder Inputs Schematic (Aux I/O Connector)	58	Installation Overview	13
Square Wave Encoder Schematic (Feedback Connector)	38	Insulation specifications	19
STO Timing	55	Internal Shunt Connector	
Thermistor Input Schematic	44	Mating Connector Part Numbers	75
TTL Outputs Schematic (PSO)	94	Pinout	74
Typical STO Configuration	51	Internal Shunt Specifications	75
fluids, dangerous	100	Introduction	15
Functional Diagram	18	IP20 Drive IP Rating	21
Fuse Specifications	100	IP54 Compliant Enclosure	21
Control Supply at L	100	Isolated Output Current Sinks Schematic (PSO)	94
External Shunt (-SX1)	100	Isolated Output Current Sources Schematic (PSO)	94
Motor Supply at AC1	100	J	
		Joystick Interface	96
H		L	
Hall-Effect Feedback Pins on the Feedback Connector	43	Laser Firing	62
Hall-Effect Inputs (Feedback Connector)	43		
Hall-Effect Inputs Schematic	43	M	
Handling	12	Maintenance	99
Handwheel Interconnection (to Aux I/O through a BBA32 Module)	98	material, electrically conductive	100
Handwheel Interconnection to the Aux I/O Connector	98	Mating Connector	
Handwheel Interface	98	Analog Output Connector [-EB1]	91
High-Speed Input Pins on the Aux I/O Connector	69	Mating Connector P/N	
High-Speed Input Specifications	69	Analog Input Connector [-EB1]	92
High-Speed Inputs	69	Aux I/O Connector	56
High-Speed User Inputs (Aux I/O Connector)	69	Brake Power Supply Connector	72
Home Limit Input (Feedback Connector)	46	Bus Link Connector	75
Home Limit Input Connections	47	Control Supply Connector	25
Home Limit Input Diagnostic Display	48	Digital Input 2 Connector [-EB1]	89
Home Limit Input Pins on the Feedback Connector	46	Digital Output 1 Connector [-EB1]	85
Humidity	24	Digital Output 2 Connector [-EB1]	85
		External Shunt Connector	75

Feedback Connector	36	Analog Output Pins (Aux I/O Connector)	70
Internal Shunt Connector	75	Auxiliary I/O Connector	56
Motor Power Output Connector	32	Auxiliary I/O Pins (Aux I/O Connector)	57
PSO Connector [-EB1]	93	Brake Output Connector	72
Shunt Connector	75	Brake Output Pins (Feedback Connector)	49
STO Connector	50	Bus Link Connector	74
Mechanical Specifications	21	Control Supply Connector Wiring	25
Minimizing Conducted, Radiated, and System Noise for EMC/CE Compliance	28	Digital Input 1 Connector [-EB1]	88
Minimum Load Inductance specifications	19	Digital Input 2 Connector [-EB1]	89
Motor Connector		Digital Input Pins (Aux I/O Connector)	67
Mating Connector Part Numbers	36	Digital Output 1 Connector [-EB1]	85
Motor Function Relative to STO Input State	54	Digital Output Pins (Aux I/O Connector)	64
Motor Output Current Frequency specification	19	Encoder (Feedback Connector)	37
Motor Power Output Connector	32	Encoder Fault Input Pin (Feedback Connector)	45
Brushless Motor Connections	33	End of Travel Limit Input Pins (Feedback Connector)	46
Mating Connector Part Numbers	32	External Shunt Connector	74
Pinout	32	Feedback Connector	36
Motor Supply Connections	26	Hall-Effect Feedback Pins (Feedback Connector)	43
Motor Supply Connector	26	High-Speed Input Pins (Aux I/O Connector)	69
Pinout	26	Home Limit Input Pins (Feedback Connector)	46
Wiring Specifications	27	Internal Shunt Connector	74
Motor Supply Connector Fuse Specifications	27	Motor Power Output Connector	32
Motor Supply specification	19	Motor Supply Connector Wiring	26
Motor Type specification	19	Primary Encoder (Feedback Connector)	37
Mounting and Cooling	21	PSO Interface Connector [-EB1]	93
Mounting Hardware	21	PSO Pins (Aux I/O Connector)	62
Mounting Orientation	21	Shunt Connector	74
		STO Connector	50
		Thermistor Input Pin (Feedback Connector)	44
		Pollution	24
Operation	24	Position Feedback in the Diagnostic Display	42
Overview	15	Position Synchronized Output (Aux I/O Connector)	62
		Position Synchronized Output (PSO) Interface [-EB1]	93
		Positive Motor Direction	34
		Power Amplifier Bandwidth specification	19
packing list	12	Power Requirements	20
PC Configuration and Operation Information	82	Preventative Maintenance	100
Phasing		Primary Encoder (Feedback Connector)	37
End of Travel Limits	48	Primary Encoder Pins on the Feedback Connector	37
Powered Brushless Motor	34	Protective Features specifications	19
Unpowered Brushless Motor/Feedback	35	PSO	
Pinout		Isolated Output Sinks Current Schematic	94
Analog Input Connector [-EB1]	92	Isolated Output Sources Current Schematic	94
Analog Input Pins (Aux I/O Connector)	71	TTL Outputs Schematic	94
Analog Output Connector [-EB1]	91		

PSO (Aux I/O Connector)	62	Digital Outputs (Aux I/O Connector)	64
PSO Connector [-EB1] Mating Connector Part Numbers	93	Digital Outputs [-EB1]	84
PSO Interface Connector Pinout [-EB1]	93	High-Speed Inputs	69
PSO Output Sources	62	Internal Shunt	75
PSO Pins (Aux I/O Connector)	62	Motor Supply Connector Fuse	27
PSO Specifications (Aux I/O Connector)	62	Motor Supply Connector Wiring	27
PSO Specifications [-EB1]	93	PSO (Aux I/O Connector)	62
PWM Switching Frequency specifications	19	PSO [-EB1]	93
R		RS-422 Encoder (Feedback Connector)	38,58
Resolute absolute encoder	39,59	Sine Wave Encoder (Auxiliary I/O Connector)	60
Revision History	103	Sine Wave Encoder (Feedback Connector)	40
RS-422 Encoder Specifications (Feedback Connector)	38,58	Square Wave Encoder (Feedback Connector)	38,58
RS-422 Line Driver Encoder	38	STO Electrical Specifications	51
RS-422 Line Driver Encoder (Auxiliary I/O Connector)	58	Unit Weight	21
S		Square Wave Encoder	38
Safe Torque Off Input (STO)	50	Square Wave Encoder (Auxiliary I/O Connector)	58
Safety Procedures and Warnings	10	Square Wave Encoder Inputs Schematic (Aux I/O Connector)	58
SCCR	19	Square Wave Encoder Schematic (Feedback Connector)	38
serial data stream	39,59	Square Wave Encoder Specifications (Feedback Connector)	38,58
serial number	12	Standard Features	17
Shunt Connector		STO	50
Mating Connector Part Numbers	75	Connector Pinout	50
Pinout	74	Diagnostics	55
Shunt Options	74	Electrical Specifications	51
Sine Wave Encoder (Aux Connector)	60	External Delay Timer	53
Sine Wave Encoder (Auxiliary I/O Connector)	40	Functional Description	53
Sine Wave Encoder Phasing Reference Diagram	60	Mating Connector Part Numbers	50
Sine Wave Encoder Schematic (Auxiliary I/O Connector)	61	Motor Function Relative to the STO Input State	54
Sine Wave Encoder Specifications (Auxiliary I/O Connector)	60	Signal Delay	54
Sine Wave Encoder Specifications (Feedback Connector)	40	Standards	52
Specifications		Standards Data	52
Analog Encoder (Auxiliary I/O Connector)	60	Startup Validation Testing	54
Analog Encoder (Feedback Connector)	40	Timing	55
Analog Input 0 (Aux I/O Connector)	71	Typical Configuration	51
Analog Output 0 (Aux I/O Connector)	70	Storage	12
Analog Outputs [-EB1]	91	Sync-Related Commands	78
Brake Control Relay	49	Sync Port Cables	78
Control Board Fuses	100	Sync Ports	78
Differential Analog Inputs [-EB1]	92	System part number	12
Digital Inputs (Aux I/O Connector)	67	System Power Requirements	20
Digital Inputs [-EB1]	88	T	
		Table of Contents	3

Thermistor Input (Feedback Connector)	44
Thermistor Input Pin on the Feedback Connector	44
Thermistor Input Schematic	44
Travel Limit Input (Feedback Connector)	46
TTL Outputs Schematic (PSO)	94
Two Axis Joystick Interface	96
Two Axis Joystick Interface (to the I/O board of two drives)	97
Typical STO Configuration	51

U

Unit Weight	21
Use	24
User Power Supply Output specification	19

W

Warranty and Field Service	101
Wire Colors for Aerotech-Supplied Brushless Motor Cables	33

This page intentionally left blank.